

Lifting Capacities

Telescopic Rough Terrain Crane

RTC-8070

70-ton (63.5 metric ton)


Boom and fly capacities for this machine are listed by the following sections:

Fully Extended Outriggers

- Working Range Diagram (15,000 lb. Counterweight)
- 41' to 69' 6" main boom capacities, **A-max** Mode
- 41' to 127' main boom capacities, Basic Mode "B"
- 39' 6" offset fly capacities, Basic Mode "B"
- 39' 6" to 67' Two-piece offsettable fly capacities, Basic Mode "B"

On Tires

- Working Range Diagram (15,000 lb. Counterweight)
- 41' to 69' 6" main boom capacities, **A-max** Mode
- 41' to 90' main boom capacities, Basic Mode "B"

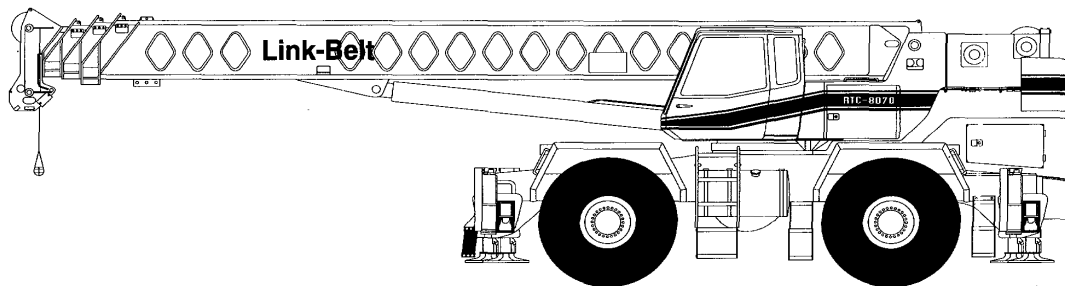

CAUTION: This material is supplied for reference only. Operator must refer to in-cab crane rating manual to determine allowable machine lifting capacities and operating procedures.

Link-Belt
CONSTRUCTION EQUIPMENT**Table of Contents**

Page	Contents
3-4	Operating Instructions
5	A -max Mode & Basic Mode "B" Boom Extension Diagram
5	Winch Performance
5	Wire Rope Strength
5	Working Areas
5	Hydraulic Circuit Pressure Settings
5	Capacity Deductions For Auxiliary Load Handling Equipment
5	Tire Inflation
5	Pontoon Loadings
5	Outrigger Spread
	Fully Extended Outriggers
6	Working Range Diagram
7	Main Boom Lifting Capacities
8	Fly Lifting Capacities
	On Tires
9	Working Range Diagram
10-11	Main Boom Lifting Capacities - 29.5 x 25 (28-PR) Tires

OPERATING INSTRUCTIONS

GENERAL:

1. Rated lifting capacities in pounds as shown on lift charts pertain to this crane as originally manufactured and normally equipped. Modifications to the crane or use of optional equipment other than that specified can result in a reduction of capacity.
2. Construction equipment can be dangerous if improperly operated or maintained. Operation and maintenance of this crane must be in compliance with the information in the Operator's, Parts, and Safety Manuals supplied with this crane. If these manuals are missing, order replacements through the distributor.
3. The operator and other personnel associated with this crane shall read and fully understand the latest applicable American National Standards ASME B30.5 safety standards for cranes.
4. The rated lifting capacities are based on crane standing level on firm supporting surface.

SET UP:

1. The crane shall be leveled on a firm supporting surface. Depending on the nature of the supporting surface, it may be necessary to have structural supports under the outrigger pontoons or tires to spread the load to a larger bearing surface.
2. When making lifts on outriggers, all tires must be free of supporting surface. All outrigger beams must be extended to the same length; fully retracted, intermediate extended, or fully extended.
3. When making lifts on tires, they must be inflated to the recommended pressure. (See Operation note 20 and Tire Inflation.)
4. When operating on tires over the side, do not exceed 66 degree maximum boom angle. Loss of backward stability will occur causing a backward tipping condition.
5. When operating with 0 pound counterweight, do not swing over side on tires unless boom is fully retracted and boom angle is above 45°.
6. For required parts of line, see Wire Rope Capacity and Winch Performance.
7. Before setting up on intermediate outriggers, retracted outriggers, or tires, refer to Working

Range Diagrams and rated lifting capacities to determine allowable crane configurations.

OPERATION:

1. Rated lifting capacities at rated radii shall not be exceeded. Do not tip the crane to determine allowable loads. For concrete bucket operation, weight of bucket and load shall not exceed 80% of rated lifting capacities. For clamshell bucket operation, weight of the bucket and bucket contents is restricted to a maximum weight of 7000 pounds or 80% of rated lifting capacity, whichever is less. For magnet operation, weight of the magnet and load is restricted to a maximum weight of 7000 pounds or 80% of rated lifting capacity, whichever is less. For clamshell and magnet operation, maximum boom length is restricted to 60 ft. and the boom angle is restricted to a minimum of 35°. Lifts with either fly erected are prohibited for both clam and magnet operation.
2. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads. Rated lifting capacities shown on intermediate extended or fully retracted outriggers are determined by the formula, rated load = (tipping load - 0.1 X load factor)/1.25. Rated lifting capacities shown on tires do not exceed 75% of the tipping loads. Tipping loads are determined by SAE crane stability test code J-765.
3. Rated lifting capacities in the shaded areas are based on structural strength or hydraulic limitations and have been tested to meet minimum requirements of SAE J-1063 cantilevered boom crane structures - method of test. The rated lifting capacities in non-shaded areas are based on stability ratings. Some capacities are limited by a maximum obtainable 78° boom angle.
4. Rated lifting capacities include the weight of the hook ball/block, slings, bucket, magnet and auxiliary lifting devices. Their weights must be subtracted from the listed rated capacity to obtain the net load which can be lifted. Rated lifting capacities include the deduct for either fly stowed on the base of the boom. For deducts of either fly

Link-Belt



CONSTRUCTION EQUIPMENT

Operating Instructions (*continued*)

- erected, but not used, see Capacity Deductions For Auxiliary Load Handling Equipment.
5. Rated lifting capacities are based on freely suspended loads. No attempt shall be made to move a load horizontally on the ground in any direction.
 6. Rated lifting capacities are for lift crane service only.
 7. Do not operate at any radii or boom lengths (minimum or maximum) where capacities are not listed. At these positions, the crane can tip or cause boom failure.
 8. The maximum loads which can be telescoped are not definable because of variation in loadings and crane maintenance, but it is permissible to attempt retraction and extension within the limits of the applicable load rating chart.
 9. For main boom capacities when either boom length or radius or both are between values listed, proceed as follows:
 - a. For boom lengths not listed, use rating for next longer boom length or next shorter boom length, whichever is smaller.
 - b. For load radii not listed, use rating for next larger radius.
 10. The user shall operate at reduced ratings to allow for adverse job conditions, such as: soft or uneven ground, out of level conditions, wind, side loads, pendulum action, jerking or sudden stopping of loads, hazardous conditions, experience of personnel, traveling with loads, electrical wires, etc. Side load on boom or fly is dangerous and shall be avoided.
 11. Rated lifting capacities do not account for wind on suspended load or boom. Rated capacities and boom length shall be appropriately reduced as wind velocity approaches 20 mph.
 12. When making lifts with auxiliary head machinery, the effective length of the boom increases by 2 feet.
 13. Power sections of boom must be extended in accordance with boom mode "A" or "B". In boom mode "B" all power sections must be extended or retracted equally.
 14. The least stable rated working area depends on the configuration of the crane setup.
 15. Rated lifting capacities are based on correct reeving. Deduction must be made for excessive reeving. Any reeving over minimum required (see Wire Rope Capacity) is considered excessive and must be accounted for when making lifts. Use Working Range Diagram to estimate the extra feet of rope then deduct 1 lb for each extra foot of wire rope before attempting to lift a load.
 16. The loaded boom angle combined with the boom length give only an approximation of the operating radius. The boom angle, before loading, should be greater to account for deflection. For main boom capacities, the loaded boom angle is for reference only. For fly capacities, the load radius is for reference only.
 17. For fly capacities with main boom length less than 127 ft. and greater than 100 ft., the rated capacities are determined by the boom angle using the 127 ft. boom and fly chart. For angles not shown use the next lower boom angle to determine the rated capacity.
 18. For fly capacities with main boom length less the 100 ft., the rated capacities are determined by the boom angle only using the 100 ft. boom and fly chart. For angles not shown, use the next lower boom angle to determine the rated capacity.
 19. The 41 ft. boom length structural capacities are based on boom fully retracted. If the boom is not fully retracted, do not exceed capacities shown for the 50 ft. boom length.
 20. Rated lifting capacities on tires depend on tire capacity, condition of tires, and tire air pressure. On tire capacities require lifting from main boom head only on a smooth and level surface. Pick and carry operations are restricted to a maximum speed of 1 mph. The boom must be centered over the front of the crane with two position travel swing lock engaged and the load must be restrained from swinging. Lifts with any fly erected on tires are prohibited. For correct tire pressure, see Tire Inflation.

DEFINITIONS:

1. Load Radius: Horizontal distance from a projection of the axis of rotation to the supporting surface, before loading, to the center of the vertical hoist line or tackle with load applied.
2. Loaded Boom Angle: $\angle^\circ$ The angle between the boom base section and horizontal with freely suspended load at the rated radius.
3. Working Area: Area measured in a circular arc about the center line of rotation as shown on the Working Area Diagram.
4. Freely Suspended Load: Load hanging free with no direct external force applied except by the hoist line.
5. Side Load: Horizontal side force applied to the lifted load either on the ground or in the air.
6. No Load Stability Limit: The radius or boom angle beyond which it is not permitted to position the boom because the crane can overturn without any load on the hook.
7. Load Factor: Load applied at the boom tip which gives the same moment effect as the boom mass.

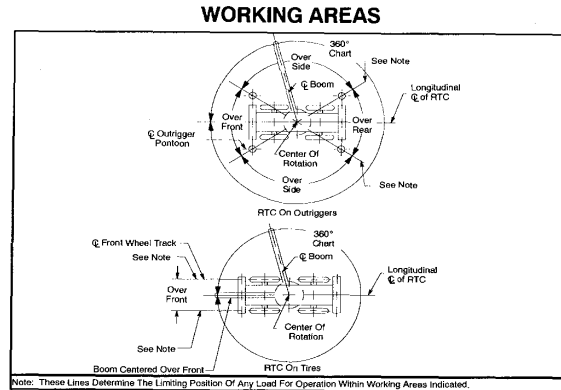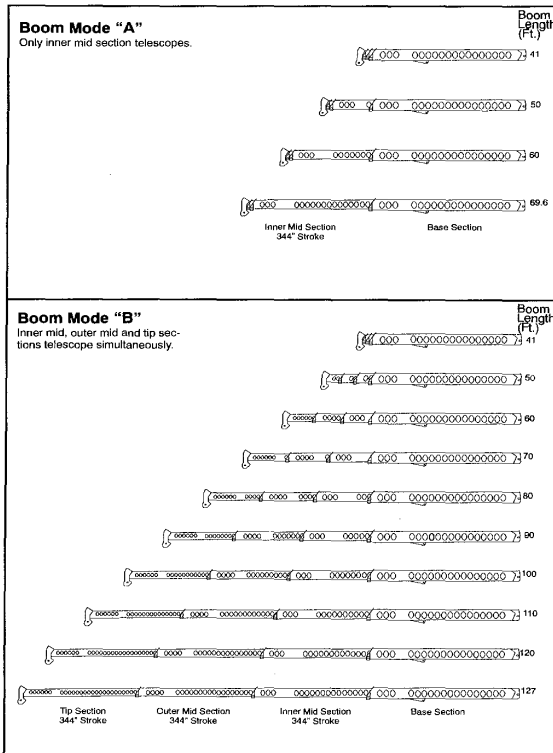

HYDRAULIC CIRCUIT PRESSURE SETTINGS

Function	Pressure (PSI)
Front And Rear Winch	3500
Outriggers	3000
Boom Hoist	3500
Telescope	3000
Swing	1500
Steering	2500
Pilot Control	500
Counterweight Removal	1700

CAPACITY DEDUCTIONS FOR AUXILIARY LOAD HANDLING EQUIPMENT

Load Handling Equipment	Weight (Lbs.)
Auxiliary Head Attached	100
40 Ton Quick Reeve 4 Sheave Hook Block (See Hook Block For Actual Weight)	720
60 Ton Quick Reeve 4 Sheave Hook Block (See Hook Block For Actual Weight)	1100
70 Ton Quick Reeve 5 Sheave Hook Block (See Hook Block For Actual Weight)	1400
8.5 Ton Hook Ball (See Hook Ball For Actual Weight)	360

Lifting From Main Boom With:

39.5 Ft. Or 67 Ft. Fly Stowed On Base (See Operation Note 4)	0
39.5 Ft. Offset Fly Erected But Not Used	4100
67 Ft. Offset Fly Erected But Not Used	8200

Lifting From 39.5 Ft. Offset Fly With:

27.5 Ft. Fly Tip Erected But Not Used	PROHIBITED
27.5 Ft. Fly Tip Stowed On 39.5 Ft. Offset Fly	PROHIBITED

Note: Capacity deductions are for Link-Belt supplied equipment only.

WINCH PERFORMANCE

Winch Line Pulls				Drum Rope Capacity (Ft.)	
Wire Rope Layer	Two Speed Winch				
	Low Speed	High Speed	Layer	Total	
	Available Lbs.*	Available Lbs.			
1	17,117	8,453	114	114	
2	15,737	7,771	124	238	
3	14,563	7,192	134	372	
4	13,552	6,692	144	516	
5	12,672	6,258	154	670	
6	N/A	N/A	164	834	

*Maximum lifting capacity: Type RB Rope=12,920 Type ZB Rope=15,600

WIRE ROPE CAPACITY

Maximum Lifting Capacities Based On Wire Rope Strength			
Parts of Line	3/4"	3/4"	Notes
	Type RB	Type ZB	
1	12,920*	15,600	Capacities shown are in pounds and working loads must not exceed the ratings on the capacity charts in the Crane Rating Manual. Study Operator's Manual for wire rope inspection procedures. *Use of swivel end with 1 part of line is not recommended.
2	25,840	31,200	
3	38,760	46,800	
4	51,680	62,400	
5	64,600	78,000	
6	77,520	93,600	
7	90,440	109,200	
8	103,360	124,800	
9	116,280	140,400	
10	129,200	156,000	
LBCE	DESCRIPTION		
TYPE RB	18 X 19 Rotation Resistant - Compact Strand - High Strength, Preformed, Right Regular Lay		
TYPE ZB	36 X 7 Rotation Resistant - Extra Improved Plow Steel - Right Regular Lay		

TIRE INFLATION

Tire Size	Operation	Tire Pressure (PSI)
29.5 x 25-28 PR	1 MPH Stationary	75

PONTOON LOADINGS

Maximum Pontoon Load:	Maximum Pontoon Ground Bearing Pressure:
94,000 Lbs.	208 PSI


OUTRIGGER SPREAD

Position	Distance
Fully Retracted	(120.75") 10'-3/4"
Intermediate Extended	(196.75") 16'-4 3/4"
Fully Extended	(276") 23'-0"



Link-Belt
CONSTRUCTION EQUIPMENT

WORKING RANGE DIAGRAM

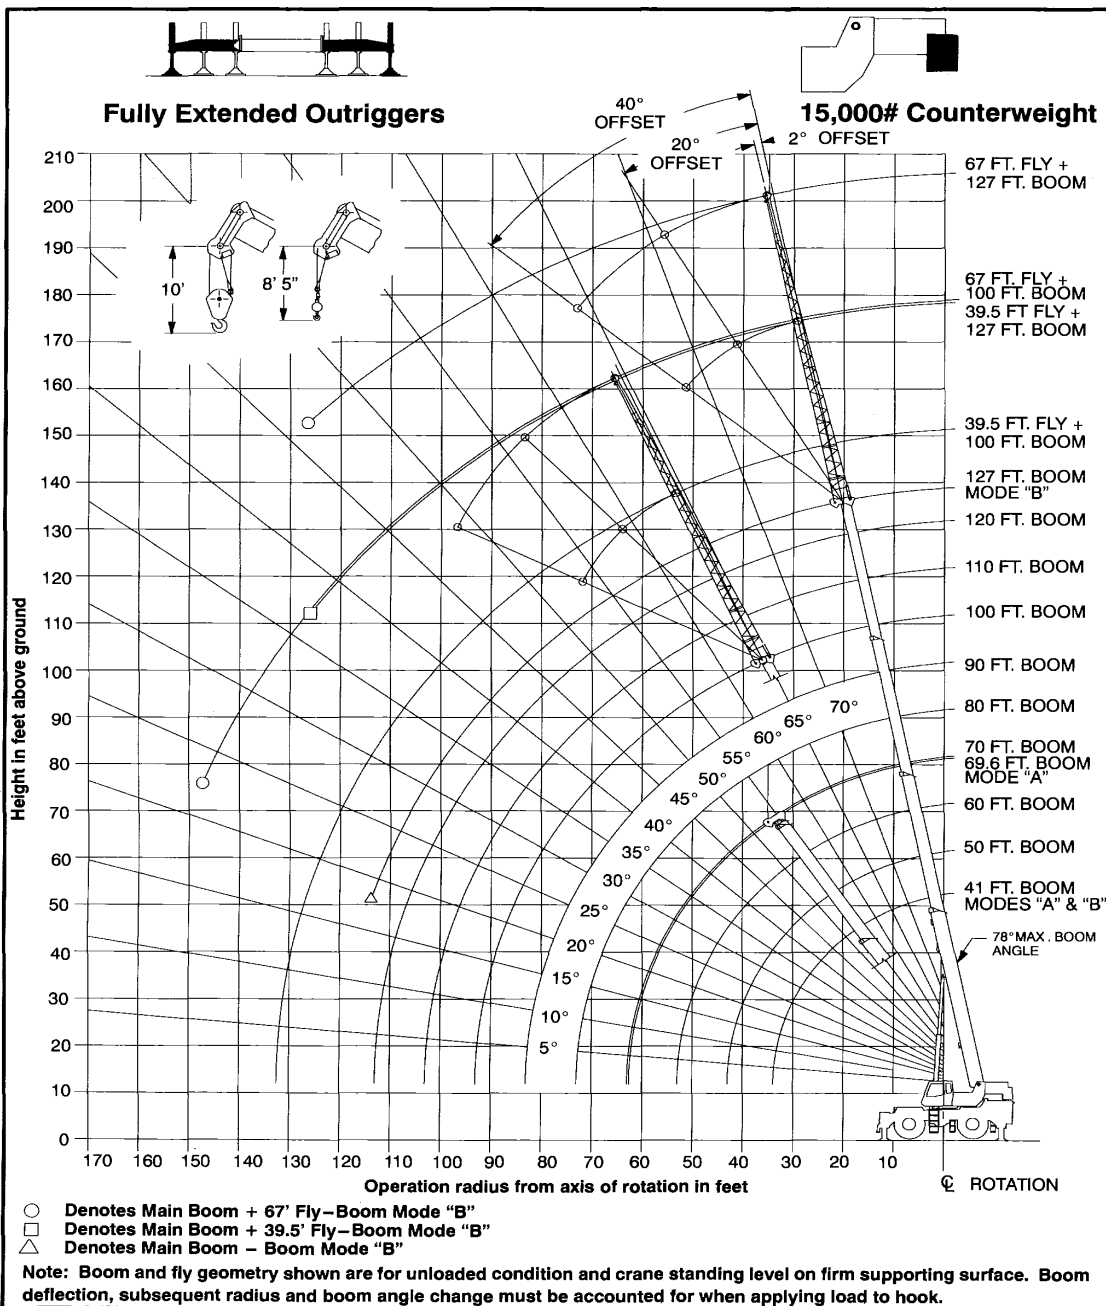

WARNING

Do Not Lower The Boom Below The Minimum Boom Angle For No Load Stability As Shown In The Lift Charts For The Boom Lengths Given. Loss Of Stability Will Occur Causing A Tipping Condition.

Fully Extended Outriggers - Main Boom Capacities

Rated Lifting Capacities In Pounds
Fully Extended Outriggers
See Set Up Note 2.

Load Radius (Ft.)	41 Ft.			50 Ft.			Load Radius (Ft.)
	360°	Over Front	360°	360°	Over Front	360°	
9	70.5	140,000	140,000	73.0	75,100	75,100	9
10	69.0	128,600	128,600	70.5	75,100	75,100	10
12	66.0	116,500	118,900	67.0	75,100	75,100	12
15	61.0	100,100	101,800	60.5	74,100	74,100	15
20	52.5	74,700	74,700	53.5	57,000	57,000	20
25	42.5	57,600	57,600	45.5	45,500	45,500	25
30	29.0	45,900	45,900	36.0	35,200	37,200	30
35				23.0	27,200	29,300	35
40							40
Min. Boom Angle/Cap.	0 (34.0)	21,100	21,100	0 (43.0)	15,900	15,900	Min. Boom Angle/Cap.

Load Radius (Ft.)	60 Ft.			69.6 Ft.			Load Radius (Ft.)
	360°	Over Front	360°	360°	Over Front	360°	
10	76.5	74,000	74,000	76.5	43,900	43,900	10
12	74.5	74,000	74,000	74.5	43,900	43,900	12
15	71.5	74,000	74,000	70.0	43,900	43,900	15
20	66.0	73,600	73,600	65.5	43,900	43,900	20
25	60.5	58,600	58,600	61.0	37,900	37,900	25
30	55.0	45,100	45,100	56.0	33,200	33,200	30
35	48.5	34,600	34,600	50.5	26,200	26,300	35
40	41.0	26,600	28,800	44.5	20,700	22,500	40
45	32.5	21,100	22,900	37.5	16,600	18,100	45
50	21.0	16,900	18,500	29.5	13,500	14,800	50
55				18.5	10,900	12,100	55
60							60
Min. Boom Angle/Cap.	0 (53.0)	10,800	10,800	0 (62.6)	7,300	7,300	Min. Boom Angle/Cap.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

Rated Lifting Capacities In Pounds
Fully Extended Outriggers
See Set Up Note 2.

Load Radius (Ft.)	41 Ft.			50 Ft.			Load Radius (Ft.)
	360°	Over Front	360°	360°	Over Front	360°	
9	70.5	140,000	140,000	73.0	38,000	38,000	9
10	69.0	128,600	128,600	70.5	38,000	38,000	10
12	66.0	116,500	118,900	67.0	38,000	38,000	12
15	61.0	100,100	101,800	60.5	38,000	38,000	15
20	52.5	74,700	74,700	53.0	38,000	38,000	20
25	42.5	57,600	57,600	45.5	38,000	38,000	25
30	29.0	45,900	45,900	36.0	28,700	30,600	30
35				23.0	28,700	30,600	35
40							40
Min. Boom Angle/Cap.	0 (34.0)	21,100	21,100	0 (43.0)	14,900	14,900	Min. Boom Angle/Cap.

Load Radius (Ft.)	60 Ft.			70 Ft.			Load Radius (Ft.)
	360°	Over Front	360°	360°	Over Front	360°	
10	76.0	38,000	38,000	76.5	38,000	38,000	10
12	74.0	38,000	38,000	74.5	38,000	38,000	12
15	71.0	38,000	38,000	70.0	38,000	38,000	15
20	66.0	38,000	38,000	65.5	38,000	38,000	20
25	60.5	38,000	38,000	61.0	38,000	38,000	25
30	54.5	38,000	38,000	55.5	37,700	38,000	30
35	48.5	37,300	38,000	50.5	31,400	31,700	35
40	41.0	29,200	31,400	44.5	23,900	25,600	40
45	32.5	23,600	25,400	38.0	19,700	21,200	45
50	21.0	19,300	20,800	30.0	16,400	17,700	50
55				19.5	13,800	15,000	55
60							60
Min. Boom Angle/Cap.	0 (53.0)	10,500	10,500	0 (63.0)	7,600	7,600	Min. Boom Angle/Cap.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

Rated Lifting Capacities In Pounds
Fully Extended Outriggers
See Set Up Note 2.

Load Radius (Ft.)	80 Ft.			90 Ft.			100 Ft.			Load Radius (Ft.)
	360°	Over Front	360°	360°	Over Front	360°	360°	Over Front	360°	
15	76.5	38,000	38,000	77.0	37,400	37,400	77.0	37,400	37,400	15
20	73.0	38,000	38,000	74.0	32,700	32,700	74.0	32,700	32,700	20
25	69.5	38,000	38,000	71.0	29,000	29,000	71.0	29,000	29,000	25
30	65.5	38,000	38,000	68.0	26,000	26,000	68.0	26,000	26,000	30
35	61.0	37,900	38,000	65.0	23,400	23,400	65.0	23,400	23,400	35
40	56.5	29,700	31,900	61.5	20,000	21,600	61.5	20,000	21,600	40
45	52.0	24,100	25,800	57.5	18,100	18,100	57.5	18,100	18,100	45
50	47.0	19,900	21,400	53.5	16,900	17,700	53.5	16,900	17,700	50
55	41.5	16,600	18,000	49.0	15,500	15,500	49.0	15,500	15,500	55
60	35.5	14,000	15,200	44.5	14,300	15,500	44.5	14,300	15,500	60
65	28.0	12,000	13,000	39.5	12,100	13,100	39.5	12,100	13,100	65
70	18.0	10,200	11,200	33.5	10,400	11,400	33.5	10,400	11,400	70
75				26.5	8,900	9,800	26.5	8,900	9,800	75
80				17.0	7,600	8,400	17.0	7,600	8,400	80
85							25.5	6,700	7,400	85
90							16.5	5,700	6,400	90
Min. Boom Angle/Cap.	0 (73.0)	5,500	5,500	0 (83.0)	3,900	3,900	0 (93.0)	2,700	2,700	Min. Boom Angle/Cap.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

Rated Lifting Capacities In Pounds
Fully Extended Outriggers
See Set Up Note 2.

Load Radius (Ft.)	110 Ft.			120 Ft.			127 Ft.			Load Radius (Ft.)
	360°	Over Front	360°	360°	Over Front	360°	360°	Over Front	360°	
25	76.0	29,400	29,400	77.5	23,300	23,300	78.0*	19,600	19,600	25
30	73.5	26,200	26,200	75.0	23,300	23,300	76.0	19,600	19,600	30
35	70.5	23,500	23,500	72.5	21,500	21,500	74.0	19,600	19,600	35
40	68.0	21,200	21,200	70.0	19,400	19,400	71.5	18,400	18,400	40
45	65.0	19,200	19,200	67.5	17,600	17,600	69.0	16,400	16,400	45
50	62.0	17,400	17,400	65.0	15,800	15,800	66.5	14,900	14,900	50
55	59.0	15,800	15,800	62.0	14,400	14,400	64.0	13,600	13,600	55
60	55.5	14,400	14,500	59.5	13,200	13,200	61.5	12,500	12,500	60
65	52.0	12,400	13,300	56.5	12,200	12,200	59.0	11,500	11,500	65
70	48.5	10,600	11,600	53.5	10,700	11,200	56.0	10,600	10,600	70
75	44.5	9,100	10,000	50.0	9,200	10,100	53.0	9,200	9,700	75
80	40.5	7,900	8,700	46.5	7,900	8,800	50.0	8,000	8,800	80
85	36.0	6,800	7,500	43.0	6,800	7,600	47.0	6,900	7,600	85
90	31.0	5,800	6,500	39.0	5,900	6,600	43.5	5,900	6,600	90
95	24.5	5,000	5,600	34.5	5,100	5,700	39.5	5,100	5,800	95
100	16.0	4,200	4,800	29.5	4,300	4,900	35.5	4,400	5,000	100
105				24.0	3,600	4,200	31.0	3,700	4,300	105
110				15.5	3,000	3,600	25.5	3,100	3,700	110
115							19.0	2,600	3,100	115
Min. Boom Angle/Cap.	0 (103.0)	1,700	1,700	0 (113.0)	900	900	18.0 (115.4)			Min. Boom Angle/Cap.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

Loaded Boom Angle In Degrees.


() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

* This capacity based on maximum obtainable boom angle.



Link-Belt CONSTRUCTION EQUIPMENT

Fully Extended Outriggers - Fly Capacities - Boom Mode "B"

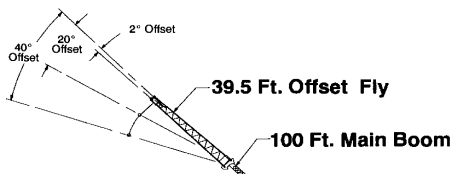


Rated Lifting Capacities in Pounds Fully Extended Outriggers See Set Up Note 2.						
FULL 15,000#						
Load Radius (Ft.)	2° Offset		20° Offset		40° Offset	
	2°	360°	2°	360°	2°	360°
30	77.0	13,900				
35	75.0	13,400				
40	73.0	12,800				
45	71.0	12,200	78.0	9,400		
50	69.0	11,700	74.0	8,900		
55	67.0	11,100	71.5	8,500	76.0	6,600
60	64.5	10,600	69.5	8,100	73.5	6,400
65	62.5	10,100	67.0	7,800	71.0	6,300
70	60.0	9,700	64.5	7,400	68.5	6,100
75	57.5	9,200	62.0	7,200	66.0	6,000
80	55.0	8,700	59.5	6,900	63.5	5,800
85	52.5	8,300	57.0	6,600	60.5	5,700
90	49.5	7,300	54.0	6,400	57.5	5,600
95	46.5	6,500	51.5	6,200	54.5	5,500
100	43.0	5,700	48.0	6,000	51.5	5,500
105	39.5	5,000	45.0	5,500	47.5	5,400
110	36.0	4,400	41.0	4,800	43.5	5,100
115	32.0	3,900	36.5	4,200	38.5	4,400
120	27.5	3,400	32.0	3,700		
125	22.0	2,900	26.0	3,100		
130	14.0	2,500				
Min. Boom Angle/Cap.	0	600	0	600	0	700
Min. Boom Angle/Cap.						

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

⚡ Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parentheses) Are In Feet.

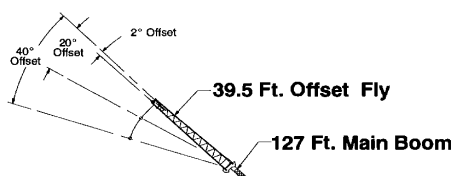

Rated Lifting Capacities in Pounds Fully Extended Outriggers See Set Up Note 2.						
FULL 15,000#						
Load Radius (Ft.)	2° Offset		20° Offset		40° Offset	
	2°	360°	2°	360°	2°	360°
35	78.0*	8,300				
40	76.5	8,300				
45	75.0	8,300				
50	73.5	8,300				
55	71.5	8,300	78.0*	8,200		
60	70.0	8,300	74.5	7,800		
65	68.5	8,300	72.5	7,800	76.0	6,200
70	67.0	8,300	71.0	7,400	74.5	6,100
75	65.0	7,800	69.0	7,200	72.5	6,000
80	63.0	7,100	67.0	7,000	70.5	5,800
85	60.5	6,600	65.5	6,800	68.5	5,700
90	58.5	6,000	63.0	6,300	66.5	5,700
95	56.5	5,600	61.0	5,800	64.0	5,600
100	54.5	5,100	58.5	5,300	62.0	5,500
105	52.0	4,700	56.5	4,900	59.5	5,100
110	49.5	4,100	54.0	4,500	57.0	4,700
115	47.0	3,500	51.0	4,000	54.0	4,300
120	44.0	3,000	48.5	3,500	51.0	3,800
125	41.5	2,600	45.5	3,000	48.0	3,200
130	38.5	2,100	42.5	2,500	44.5	2,700
135			39.0	2,100	40.5	2,200


WARNING

Do Not Lower 39.5 Ft. Offset Fly In Working Position Below 37.0 Degrees Main Boom Angle Unless Main Boom Length Is 104 Ft. Or Less, Since Loss Of Stability Will Occur Causing A Tipping Condition.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

⚡ Loaded Boom Angle In Degrees.

* This capacity based on maximum obtainable boom angle.

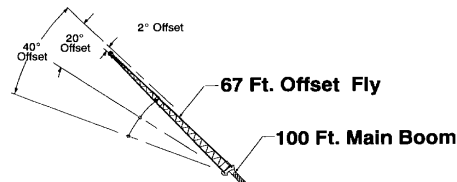

Rated Lifting Capacities in Pounds Fully Extended Outriggers See Set Up Note 2.						
FULL 15,000#						
Load Radius (Ft.)	2° Offset		20° Offset		40° Offset	
	2°	360°	2°	360°	2°	360°
40	77.0	8,300				
45	75.5	7,900				
50	73.5	7,500				
55	72.0	7,100				
60	70.0	6,800	77.0	4,700		
65	68.5	6,200	75.5	4,500		
70	66.5	5,800	73.5	4,200		
75	64.5	5,500	71.5	4,000		
80	62.5	5,200	69.5	3,800	76.0	3,000
85	60.5	4,900	67.5	3,700	74.0	3,000
90	58.5	4,600	65.5	3,500	72.0	2,900
95	56.5	4,400	63.5	3,400	69.5	2,800
100	54.5	4,200	61.5	3,300	67.5	2,700
105	52.0	3,900	59.0	3,200	65.0	2,700
110	50.0	3,800	57.0	3,100	62.5	2,600
115	47.5	3,600	54.5	3,000	60.0	2,600
120	45.0	3,400	52.0	2,900	57.0	2,500
125	42.5	3,300	49.0	2,800	54.0	2,500
130	39.5	3,100	46.5	2,700	50.5	2,500
135	36.5	2,800	43.0	2,600	47.0	2,500
140	33.0	2,400	39.5	2,600	42.5	2,500
145	29.0	2,100	35.5	2,500		
150	24.5	1,800	30.5	2,100		
155			24.0	1,700		


WARNING

Do Not Lower 67 Ft. Offset Fly In Working Position Below 22.5 Degrees Main Boom Angle Unless Main Boom Length Is 94 Ft. Or Less, Since Loss Of Stability Will Occur Causing A Tipping Condition.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

⚡ Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parentheses) Are In Feet.

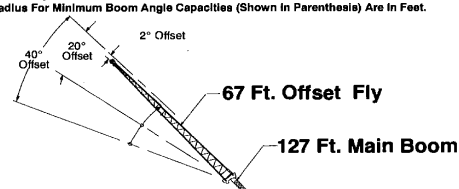

Rated Lifting Capacities in Pounds Fully Extended Outriggers See Set Up Note 2.						
FULL 15,000#						
Load Radius (Ft.)	2° Offset		20° Offset		40° Offset	
	2°	360°	2°	360°	2°	360°
50	76.5	5,800				
55	75.5	5,600				
60	74.0	5,600				
65	73.0	5,500				
70	71.5	5,500	77.5	4,200		
75	70.0	5,300	76.0	4,000		
80	68.5	5,100	74.5	3,900		
85	67.0	4,900	73.0	3,800		
90	65.5	4,800	71.5	3,800	77.0	2,900
95	64.0	4,600	70.0	3,500	75.0	2,800
100	62.0	4,300	68.0	3,400	73.5	2,800
105	60.5	3,900	66.5	3,300	71.5	2,700
110	58.5	3,600	64.5	3,200	70.0	2,600
115	56.5	3,200	63.0	3,100	68.0	2,600
120	54.5	2,900	61.0	3,000	66.0	2,600
125	52.5	2,700	59.0	2,800	64.0	2,500
130	50.5	2,400	57.0	2,600	61.5	2,500
135	48.5	2,200	54.5	2,300	59.5	2,500
140			52.5	2,100	57.0	2,300
145			50.0	1,900	54.5	2,000
150			47.5	1,700	51.5	1,800
155					48.5	1,600

WARNING


Do Not Lower 67 Ft. Offset Fly In Working Position Below 46.5 Degrees Main Boom Angle Unless Main Boom Length Is 94 Ft. Or Less, Since Loss Of Stability Will Occur Causing A Tipping Condition.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

⚡ Loaded Boom Angle In Degrees.



WORKING RANGE DIAGRAM

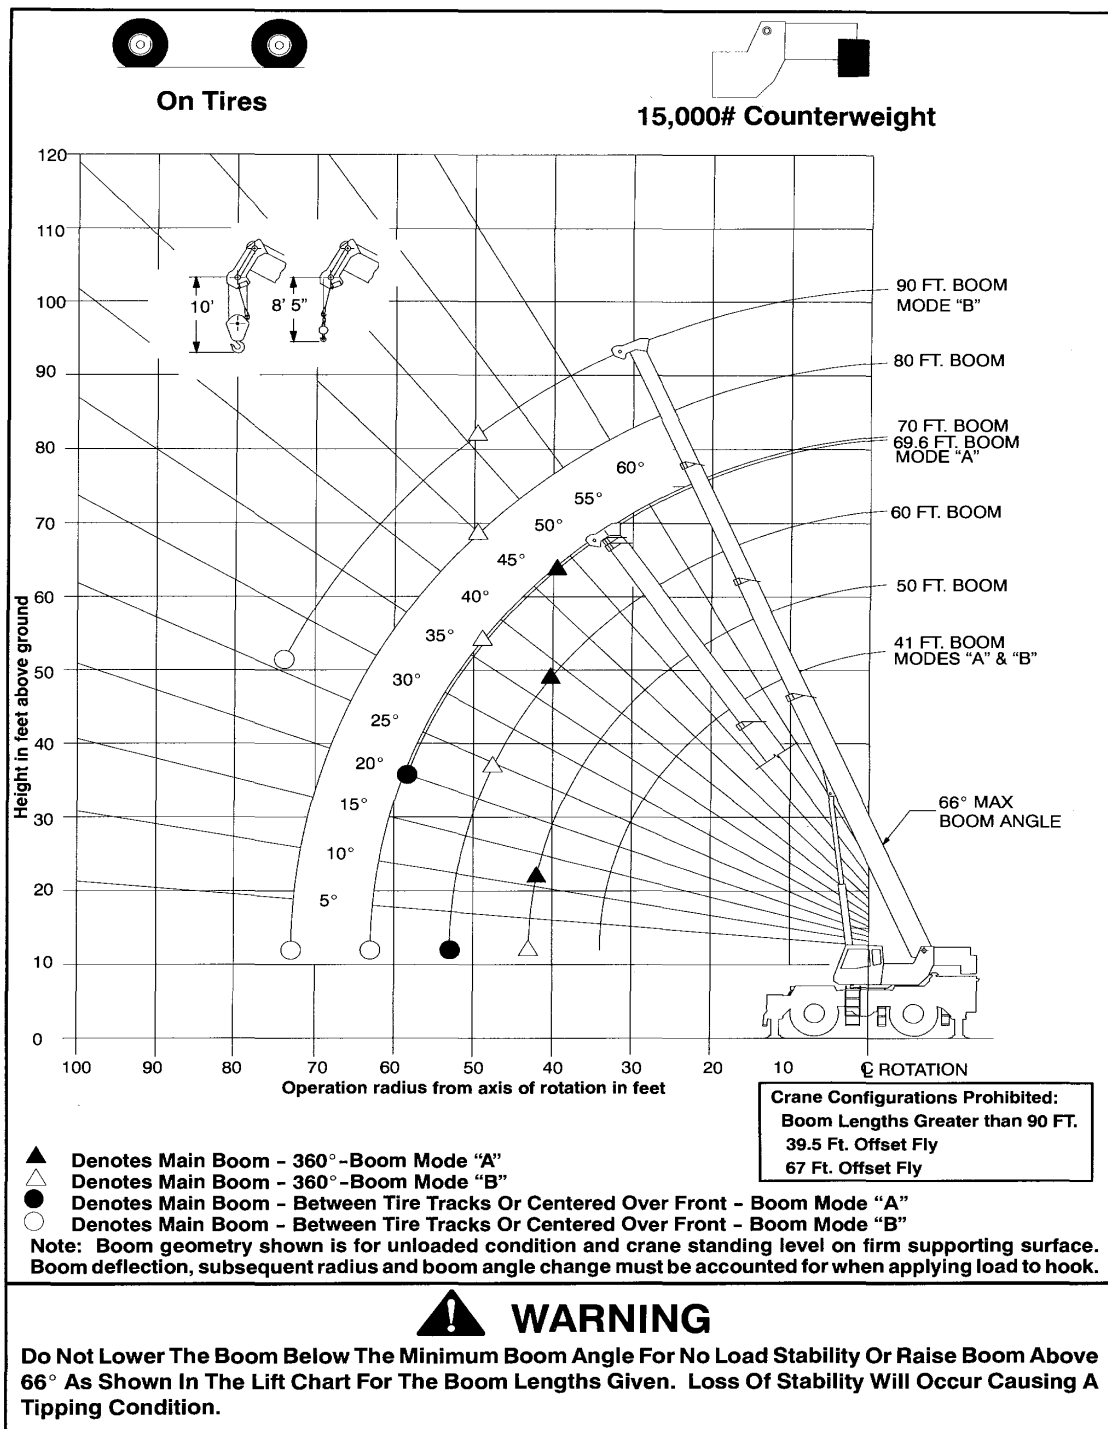

Link-Belt CONSTRUCTION EQUIPMENT

On Tires (29.5 x 25 - 28 Ply) - Main Boom Capacities (15,000 lb. Counterweight)

On Tire Capacities In Pounds
Tire Pressure: See Page 5
Stationary Capacities
Over Front Between Tire Tracks
See Operation Note 20.

ON TIRES 15,000# MAIN BOOM "A"

Load Radius (Ft.)	41 Ft.		50 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
15	61.0	54,900	60.5	42,000	15
20	52.5	42,500	53.0	28,600	20
25	42.0	29,200	45.0	20,500	25
30	29.0	20,800	36.0	15,100	30
35			23.0	11,400	35
40					40
Min. Boom Angle/Cap.	0 (34.0)	16,200	0 (43.0)	9,500	Min. Boom Angle/Cap.

Load Radius (Ft.)	60 Ft.		69.6 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
25	60.5	28,000	65.0	27,600	25
30	54.5	20,000	60.5	19,800	30
35	48.0	14,800	55.5	14,500	35
40	41.0	11,100	50.0	10,900	40
45	32.5	8,400	44.0	8,200	45
50	21.0	6,200	37.5	6,100	50
55			29.5	4,400	55
Min. Boom Angle/Cap.	0 (53.0)	5,100	20.0 (59.2)		Min. Boom Angle/Cap.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

∠ Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

On Tire Capacities In Pounds
Tire Pressure: See Page 5
Stationary Capacities
Over Front Between Tire Tracks
See Operation Note 20.

ON TIRES 15,000# MAIN BOOM "B"

Load Radius (Ft.)	41 Ft.		50 Ft.		60 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
15	61.0	54,900	60.0	38,000			15
20	52.5	42,500	53.0	29,900	60.5	30,300	20
25	42.0	29,200	45.0	21,700	54.5	22,100	25
30	29.0	20,800	36.0	16,300	48.0	16,800	30
35			23.0	12,500	41.0	13,000	35
40					32.5	10,200	40
45					20.5	8,100	45
50							50
Min. Boom Angle/Cap.	0 (34.0)	16,200	0 (43.0)	10,600	0 (53.0)	6,900	Min. Boom Angle/Cap.

Load Radius (Ft.)	70 Ft.		80 Ft.		90 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
25	65.0	30,600	64.5	22,600			25
30	60.5	22,400	60.5	17,300	64.5	17,400	30
35	55.5	17,100	56.0	13,500	60.5	13,600	35
40	50.0	13,400	51.5	10,900	57.0	11,000	40
45	44.5	10,600	46.5	8,700	53.0	8,900	45
50	37.5	8,400	41.5	7,000	48.5	7,200	50
55	30.0	6,700	35.0	5,600	44.0	5,800	55
60	19.0	5,300	28.0	4,400	39.0	4,600	60
65			18.0	3,400	33.0	3,600	65
70							70
Min. Boom Angle/Cap.	0 (63.0)	4,500	0 (73.0)	2,900	26.0 (75.3)		Min. Boom Angle/Cap.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

∠ Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

On Tire Capacities In Pounds
Tire Pressure: See Page 5
Pick & Carry Capacities
(1mph) Boom Centered Over Front
See Operation Note 20.

ON TIRES 15,000# MAIN BOOM "A"

Load Radius (Ft.)	41 Ft.		50 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
15	61.0	51,400	60.0	38,700	15
20	52.5	39,100	53.0	28,600	20
25	42.0	29,200	45.0	20,500	25
30	29.0	20,800	36.0	15,100	30
35			23.0	11,300	35
40					40
Min. Boom Angle/Cap.	0 (34.0)	16,200	0 (43.0)	9,500	Min. Boom Angle/Cap.

Load Radius (Ft.)	60 Ft.		69.6 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
25	60.5	28,000	65.0	27,500	25
30	54.5	20,000	60.5	19,800	30
35	48.0	14,800	55.5	14,400	35
40	41.0	11,100	50.0	10,900	40
45	32.5	8,300	44.0	8,200	45
50	21.0	6,200	37.5	6,000	50
55			29.5	4,400	55
Min. Boom Angle/Cap.	0 (53.0)	5,100	20.0 (59.2)		Min. Boom Angle/Cap.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

∠ Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

On Tire Capacities In Pounds
Tire Pressure: See Page 5
Pick & Carry Capacities
(1mph) Boom Centered Over Front
See Operation Note 20.

ON TIRES 15,000# MAIN BOOM "B"

Load Radius (Ft.)	41 Ft.		50 Ft.		60 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
15	61.0	51,400	60.0	38,000			15
20	52.5	39,100	53.0	29,900	60.5	30,300	20
25	42.0	29,200	45.0	21,700	54.5	22,100	25
30	29.0	20,800	36.0	16,300	48.0	16,800	30
35			23.0	12,500	41.0	13,000	35
40					32.5	10,200	40
45					20.5	8,100	45
50							50
Min. Boom Angle/Cap.	0 (34.0)	16,200	0 (43.0)	10,600	0 (53.0)	6,900	Min. Boom Angle/Cap.

Load Radius (Ft.)	70 Ft.		80 Ft.		90 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
25	65.0	30,600	64.5	22,600			25
30	60.5	22,400	60.5	17,300	64.5	17,400	30
35	55.5	17,100	56.0	13,500	60.5	13,600	35
40	50.0	13,400	51.5	10,900	57.0	11,000	40
45	44.5	10,600	46.5	8,700	53.0	8,900	45
50	37.5	8,400	41.5	7,000	48.5	7,200	50
55	30.0	6,700	35.0	5,600	44.0	5,800	55
60	19.0	5,300	28.0	4,400	39.0	4,600	60
65			18.0	3,400	33.0	3,600	65
70							70
Min. Boom Angle/Cap.	0 (63.0)	4,500	0 (73.0)	2,900	26.0 (75.3)		Min. Boom Angle/Cap.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

∠ Loaded Boom Angle In Degrees.

() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.



On Tires (29.5 x 25 - 28 Ply) - Main Boom Capacities (15,000 lb. Counterweight)

On Tire Capacities In Pounds Tire Pressure: See Page 5 Stationary Capacities-360 Degrees See Operation Note 20.					
ON TIRES					
Load Radius (Ft.)	41 Ft.		50 Ft.		Load Radius (Ft.)
	∠ °	Load	∠ °	Load	
15	61.0	33,500			15
20	52.5	20,500	60.0	20,000	20
25	42.0	13,500	53.0	13,100	25
30	29.0	9,100	45.0	8,800	30
35			35.5	5,800	35
40			23.0	3,700	40
Min. Boom Angle/Cap.	0 (34.0)	6,500	11.5 (42.5)		Min. Boom Angle/Cap.
WARNING Do Not Raise The Boom Above 66 Degrees. Loss Of Backward Stability Will Occur Causing A Tipping Condition.					

Load Radius (Ft.)	60 Ft.		69.6 Ft.		Load Radius (Ft.)
	∠ °	Load	∠ °	Load	
25	60.0	12,800	65.0	12,500	25
30	54.5	8,500	60.0	8,300	30
35	48.0	5,600	55.0	5,400	35
40	41.0	3,500	49.5	3,300	40
Min. Boom Angle/Cap.	38.0 (41.7)		48.0 (41.3)		Min. Boom Angle/Cap.
WARNING Do Not Raise The Boom Above 66 Degrees. Loss Of Backward Stability Will Occur Causing A Tipping Condition.					

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".
∠ Loaded Boom Angle In Degrees.
() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

On Tire Capacities In Pounds Tire Pressure: See Page 5 Stationary Capacities-360 Degrees See Operation Note 20.					
ON TIRES					
Load Radius (Ft.)	41 Ft.		50 Ft.		Load Radius (Ft.)
	∠ °	Load	∠ °	Load	
15	61.0	33,500	66.5	34,100	15
20	52.5	20,500	60.0	21,300	20
25	42.0	13,500	53.0	14,200	25
30	29.0	9,100	45.0	9,800	30
35			35.5	6,900	35
40			23.0	4,700	40
45					45
50					50
Min. Boom Angle/Cap.	0 (34.0)	6,500	0 (43.0)	3,600	Min. Boom Angle/Cap.
WARNING Do Not Raise The Boom Above 66 Degrees. Loss Of Backward Stability Will Occur Causing A Tipping Condition.					

Load Radius (Ft.)	70 Ft.		80 Ft.		90 Ft.		Load Radius (Ft.)
	∠ °	Load	∠ °	Load	∠ °	Load	
25	65.0	15,000					25
30	60.0	10,800	64.5	10,800			30
35	55.5	7,800	60.5	8,000	64.0	8,100	35
40	50.0	5,600	56.0	5,800	60.5	6,000	40
45	44.0	3,900	51.5	4,200	56.5	4,300	45
50			46.5	2,900	52.5	3,000	50
Min. Boom Angle/Cap.	37.0 (50.3)		45.0 (51.3)		51.0 (52.1)		Min. Boom Angle/Cap.
WARNING Do Not Raise The Boom Above 66 Degrees. Loss Of Backward Stability Will Occur Causing A Tipping Condition.							

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".
∠ Loaded Boom Angle In Degrees.
() Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.



Link-Belt
CONSTRUCTION EQUIPMENT

Bigge Crane and Rigging Co.

10700 Bigge Avenue
San Leandro, CA 94577
Phone: (888) 337-BIGGE or (510) 638-8100
Fax: (510) 639-4053
Email: info@bigge.com
Web site: www.bigge.com

Link-Belt Construction Equipment Company Lexington, Kentucky

® Link-Belt is a registered trademark. All rights reserved. Copyright 1999.
We are constantly improving our products and therefore reserve the right to change designs and specifications.