



TEREX


Range Diagram and Lifting Capacity

T560-1

Cranes


60 TON LIFTING CAPACITY

RANGE DIAGRAM 35' - 110' BOOM




DIMENSIONS ARE FOR LARGEST  
FACTORY FURNISHED HOOK BLOCK  
AND HOOK & BALL WITH ANTI-TWO  
BLOCK ACTIVATED

|                      |                                                  |
|----------------------|--------------------------------------------------|
| COUNTER WEIGHT       | W/AUX WINCH 10,400 LB<br>W/O AUX WINCH 11,500 LB |
| BOOM LENGTH          | 35'-110'                                         |
| STABILITY PERCENTAGE | ON OUTRIGGERS 85%<br>ON TIRES 75%                |
| PCSA CLASS           | 10-196                                           |

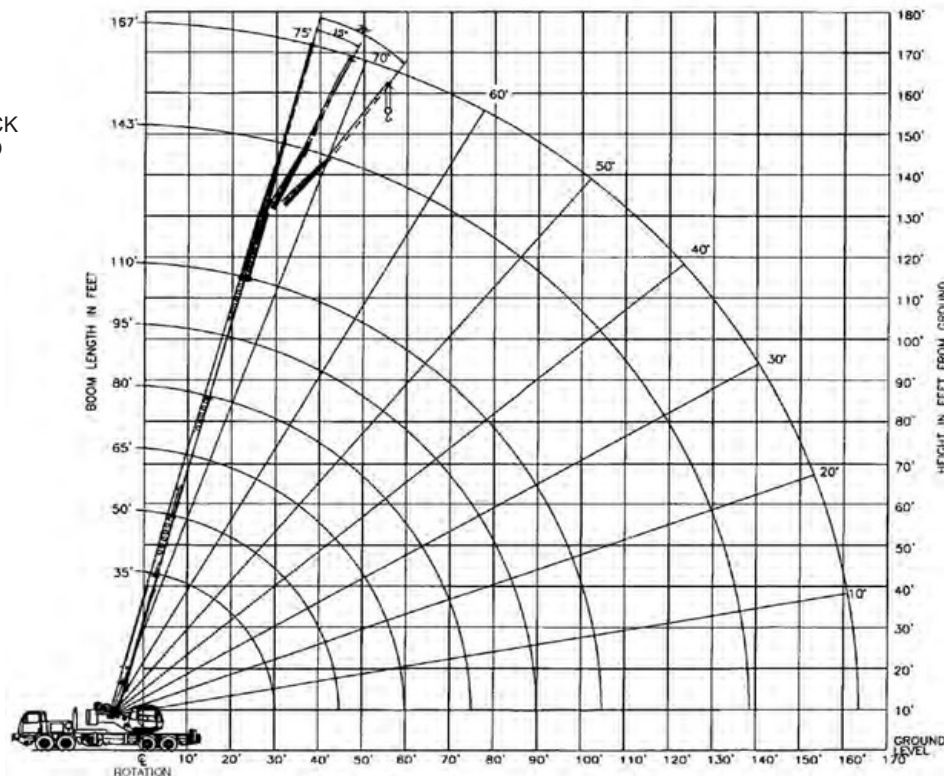

CRANE WORKING CONDITIONS

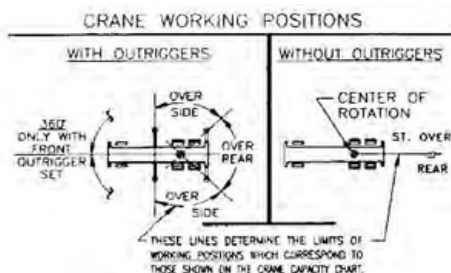

REDUCTION IN MAIN BOOM CAPACITY

|                            |        |
|----------------------------|--------|
| All jib in stowed position | 0 lb   |
| Aux.boom in head sheave    | 100 lb |

HOOK BLOCK WEIGHTS

|                           |          |
|---------------------------|----------|
| Hook and ball             |          |
| 40T Hook block (4 sheave) | 239 lb   |
| 50T Hook block (5 sheave) | 690 lb   |
| 50T Hook block (6 sheave) | 888 lb   |
| 60T Hook block (5 sheave) | 913 lb   |
| 60T Hook block (6 sheave) | 1,151 lb |
|                           | 1,151 lb |
|                           | 1,151 lb |



TEREX

TRUCK CRANE  
**T560-1**


LIFTING CAPACITIES

CAUTION : Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change

ON OUTRIGGERS - FULLY EXTENDED WITH 11,500 LB COUNTERWEIGHT

| LOAD<br>RADIUS<br>(FT) | BOOM LENGTH 35'                  |                      |              | BOOM LENGTH 50'                  |                      |              | BOOM LENGTH 65'                  |                      |              | LOAD<br>RADIUS<br>(FT) |
|------------------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|------------------------|
|                        | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |                        |
| 10                     | 66.7                             | 120,000*             | 120,000*     | 73.9                             | 60,100*              | 60,100*      |                                  |                      |              | 10                     |
| 12                     | 63.1                             | 106,500*             | 106,500*     | 71.5                             | 60,100*              | 60,100*      |                                  |                      |              | 12                     |
| 15                     | 57.5                             | 83,400*              | 83,400*      | 67.9                             | 60,100*              | 60,100*      |                                  |                      |              | 15                     |
| 20                     | 47.1                             | 60,200*              | 60,200*      | 61.5                             | 60,100*              | 60,100*      | 73.2                             | 58,800*              | 58,800*      | 20                     |
| 25                     | 34.5                             | 46,100*              | 46,100*      | 54.8                             | 47,500*              | 47,500*      | 68.5                             | 52,200*              | 52,200*      | 25                     |
| 30                     | 14.8                             | 36,600*              | 32,000       | 47.4                             | 38,100*              | 33,900       | 63.7                             | 46,900*              | 46,900*      | 30                     |
| 31.2                   | 0.0                              | 20,900*              | 20,900*      | 39.1                             | 31400                | 25600        | 58.6                             | 38,700*              | 34,400       | 31.2                   |
| 40                     |                                  |                      |              | 28.8                             | 26,100               | 19,600       | 53.3                             | 3200                 | 26200        | 40                     |
| 46.2                   |                                  |                      |              | 0.0                              | 12,700*              | 12,700*      | 47.6                             | 26,800               | 20,300       | 46.2                   |
| 50                     |                                  |                      |              |                                  |                      |              | 34.1                             | 19,200               | 13,400       | 50                     |
| 55                     |                                  |                      |              |                                  |                      |              | 34.1                             | 18,200               | 13,200       | 55                     |
| 60                     |                                  |                      |              |                                  |                      |              | 25.2                             | 15,300               | 10,800       | 60                     |
| 61.2                   |                                  |                      |              |                                  |                      |              | 10.9                             | 13,000               | 8,800        | 61.2                   |
| 70                     |                                  |                      |              |                                  |                      |              | 0.0                              | 8,300*               | 8,300*       | 70                     |
| 75                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 75                     |
| 80                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 80                     |
| 85                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 85                     |
| 90                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 90                     |
| 95                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 95                     |

USE THESE CHARTS ONLY  
WHEN ALL OUTRIGGERS  
ARE FULLY EXTENDED





**TEREX**

**TRUCK CRANE  
T560-1**

**LIFTING CAPACITIES**

**CAUTION:** Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change

**ON OUTRIGGERS - FULLY EXTENDED WITH 11,500 LB COUNTERWEIGHT**

| LOAD<br>RADIUS<br>(FT) | BOOM LENGTH 80'                  |                      |              | BOOM LENGTH 95'                  |                      |              | BOOM LENGTH 110'                 |                      |              | LOAD<br>RADIUS<br>(FT) |
|------------------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|------------------------|
|                        | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |                        |
| 10                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 10                     |
| 12                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 12                     |
| 15                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 15                     |
| 20                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 20                     |
| 25                     | 72.7                             | 46,200*              | 46,200*      |                                  |                      |              |                                  |                      |              | 25                     |
| 30                     | 68.9                             | 40,700*              | 40,700*      | 72.3                             | 35,300*              | 35,300*      |                                  |                      |              | 30                     |
| 35                     | 65.0                             | 36,000*              | 35,100       | 69.1                             | 31,100*              | 31,100*      | 69.3                             | 24,800*              | 24,800*      | 35                     |
| 40                     | 61.0                             | 32,200*              | 26,500       | 65.9                             | 28,000*              | 26,700       | 69.3                             | 24,800*              | 24,800*      | 40                     |
| 45                     | 56.8                             | 27,400*              | 20,800       | 62.5                             | 25,200*              | 21,000       | 66.5                             | 22,500*              | 21,200*      | 45                     |
| 50                     | 52.4                             | 23,400*              | 16,800       | 59.1                             | 23,100*              | 17,000       | 63.7                             | 20,600*              | 17,100       | 50                     |
| 55                     | 47.1                             | 19,600               | 13,800       | 55.5                             | 19,800               | 14,000       | 60.7                             | 18,800               | 14,100       | 55                     |
| 60                     | 42.7                             | 16,600               | 11,400       | 51.2                             | 16,800               | 11,600       | 57.7                             | 16,900               | 11,800       | 60                     |
| 65                     | 37.1                             | 14,200               | 9,500        | 47.8                             | 14,400               | 9,800        | 65.5                             | 14,500               | 9,900        | 65                     |
| 70                     | 30.6                             | 12,200               | 7,900        | 43.6                             | 12,400               | 8,200        | 51.2                             | 12,600               | 8,400        | 70                     |
| 75                     | 22.7                             | 10,500               | 6,600        | 39.0                             | 10,800               | 6,900        | 47.8                             | 11,000               | 7,100        | 75                     |
| 80                     | 9.8                              | 9,000                | 5,400        | 33.9                             | 9,400                | 5,800        | 44.2                             | 9,600                | 6,000        | 80                     |
| 85                     | 0.0                              | 5,500*               | 5,100        | 28.1                             | 8,200                | 4,900        | 40.3                             | 8,400                | 5,100        | 85                     |
| 90                     |                                  |                      |              | 20.8                             | 7,100                | 4,000        | 36.1                             | 7,400                | 4,300        | 90                     |
| 95                     |                                  |                      |              | 9.0                              | 6,200                | 3,300        | 31.5                             | 6,400                | 3,500        | 95                     |
| 100                    |                                  |                      |              | 0.0                              | 3,600*               | 3,100        | 26.0                             | 5,600                | 2,900        | 100                    |
| 105                    |                                  |                      |              |                                  |                      |              | 19.3                             | 4,900                | 2,300        | 105                    |
| 110                    |                                  |                      |              |                                  |                      |              | 8.3                              | 4,200                | 1,800        | 110                    |
| 115                    |                                  |                      |              |                                  |                      |              | 0.0                              | 2,300*               | 1,600        | 115                    |
| 120                    |                                  |                      |              |                                  |                      |              |                                  |                      |              | 120                    |

**\*\*MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE**

| BOOM LENGTH 35'        |                       |              | BOOM LENGTH 50'        |                       |              | BOOM LENGTH 65'        |                       |              | BOOM LENGTH 80'        |                       |              | BOOM LENGTH 95'        |                       |              | BOOM LENGTH 110'       |                       |              |
|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|
| LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) |
| 31.2                   | 21,000*               | 21,000*      | 46.2                   | 12,800*               | 12,600*      | 61.2                   | 8,400*                | 8,300        | 76.2                   | 5,600*                | 5,000        | 91.2                   | 3,700*                | 2,900        | 106.17                 | 2,400*                | 1,500        |



### TRUCK CRANE T560-1

**LIFTING CAPACITIES** CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change

#### ON OUTRIGGERS - MID POSITION AND WITH 11,500 LB COUNTERWEIGHT


| LOAD RADIUS (FT) | BOOM LENGTH 35'         |           | BOOM LENGTH 50'         |            | BOOM LENGTH 65'        |            | BOOM LENGTH 80'        |            | BOOM LENGTH 95'        |            | BOOM LENGTH 110'       |        | LOAD RADIUS (FT) |
|------------------|-------------------------|-----------|-------------------------|------------|------------------------|------------|------------------------|------------|------------------------|------------|------------------------|--------|------------------|
|                  | LOADED BOOM ANGLE (DEG) | 360° (LB) | LOADED BOOM ANGLE (DEG) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | (DEG)  |                  |
| 10               | 66.7                    | 102,700*  | 73.9                    | 80,000*    |                        |            |                        |            |                        |            |                        |        | 10               |
| 12               | 63.1                    | 87,700*   | 71.5                    | 80,000*    |                        |            |                        |            |                        |            |                        |        | 12               |
| 15               | 57.4                    | 63,600    | 67.8                    | 65,000     | 73.2                   | 61,900*    |                        |            |                        |            |                        |        | 15               |
| 20               | 47.1                    | 35,300    | 61.5                    | 36,600     | 68.5                   | 37,200     | 72.7                   | 37,500     |                        |            |                        |        | 20               |
| 25               | 34.5                    | 22,700    | 65.8                    | 24,200     | 63.7                   | 24,700     | 68.9                   | 25,000     | 72.                    | 25,200     |                        |        | 25               |
| 30               | 14.8                    | 15,400    | 47.4                    | 17,100     | 58.3                   | 17,700     | 65.0                   | 18,000     | 3                      | 18,100     | 72.                    | 18,300 | 30               |
| 31.2             | 0.0                     | 13,900    | 39.1                    | 12,400     | 53.3                   | 13,100     | 61.0                   | 13,400     | 69.                    | 13,600     | 1                      | 13,800 | 31.2             |
| 40               |                         |           | 28.8                    | 9,200      | 47.6                   | 10,000     | 56.8                   | 10,300     | 1                      | 10,500     | 69.                    | 10,600 | 40               |
| 45               |                         |           | 12.4                    | 6,700      | 41.3                   | 7,600      | 52.4                   | 8,000      | 65.                    | 8,200      | 3                      | 8,300  | 45               |
| 46.2             |                         |           | 0.0                     | 6,100      | 34.1                   | 5,700      | 47.1                   | 6,200      | 9                      | 6,400      | 66.                    | 6,500  | 46.2             |
| 55               |                         |           |                         |            | 25.2                   | 4,300      | 42.7                   | 4,700      | 62.                    | 5,000      | 5                      | 5,100  | 55               |
| 60               |                         |           |                         |            | 10.9                   | 3,000      | 37.1                   | 3,500      | 5                      | 3,800      | 63.                    | 4,000  | 60               |
| 61.2             |                         |           |                         |            | 0.0                    | 2,700      | 30.6                   | 2,500      | 59.                    | 2,800      | 7                      | 3,000  | 61.2             |
| 70               |                         |           |                         |            |                        |            | 22.7                   | 1,700      | 1                      | 2,000      | 60.                    | 2,200  | 70               |

#### \*\*MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

| BOOM LENGTH 35'  |           | BOOM LENGTH 50'  |           | BOOM LENGTH 65'  |           | BOOM LENGTH 80'  |           | BOOM LENGTH 95'  |           | BOOM LENGTH 110' |           |
|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|
| LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) |
| 31.2             | 13,400    | 46.2             | 5,900     | 61.2             | 2,500     |                  |           |                  |           |                  |           |

55.  
5  
51.  
7  
2  
47.  
8  
43.  
6  
39.  
0

USE THESE CHARTS ONLY WHEN ALL OUTRIGGERS ARE PINNED IN MID POSITION



#### ON OUTRIGGERS - RETRACTED AND WITH 11,500 LB COUNTERWEIGHT

| LOAD RADIUS (FT) | BOOM LENGTH 35'         |           | BOOM LENGTH 50'         |            | BOOM LENGTH 65'        |            | BOOM LENGTH 80'        |            | BOOM LENGTH 95'        |            | BOOM LENGTH 110'       |       | LOAD RADIUS (FT) |
|------------------|-------------------------|-----------|-------------------------|------------|------------------------|------------|------------------------|------------|------------------------|------------|------------------------|-------|------------------|
|                  | LOADED BOOM ANGLE (DEG) | 360° (LB) | LOADED BOOM ANGLE (DEG) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | (DEG) |                  |
| 10               | 66.7                    | 53,600    | 73.9                    | 54,800     |                        |            |                        |            |                        |            |                        |       | 10               |
| 12               | 63.1                    | 38,500    | 71.5                    | 39,600     |                        |            |                        |            |                        |            |                        |       | 12               |
| 15               | 57.4                    | 25,800    | 67.8                    | 27,000     | 73.                    | 27,500     |                        |            |                        |            |                        |       | 15               |
| 20               | 47.1                    | 15,000    | 61.5                    | 16,400     | 2                      | 16,800     | 72.                    | 17,100     |                        |            |                        |       | 20               |
| 25               | 34.5                    | 9,300     | 54.8                    | 10,600     | 68.                    | 11,200     | 7                      | 11,500     | 72.                    | 11,700     |                        |       | 25               |
| 30               | 14.8                    | 5,600     | 47.4                    | 7,000      | 5                      | 7,700      | 68.                    | 8,000      | 3                      | 8,200      | 72.                    | 8,300 | 30               |
| 31.2             | 0.0                     | 4,800     | 39.1                    | 4,600      | 63.                    | 5,300      | 9                      | 5,600      | 69.                    | 5,800      | 1                      | 5,900 | 31.2             |
| 40               |                         |           | 28.8                    | 2,800      | 7                      | 3,500      | 65.                    | 3,900      | 1                      | 4,100      | 69.                    | 4,200 | 40               |
| 45               |                         |           |                         |            | 58.                    | 2,100      | 0                      | 2,500      | 65.                    | 2,800      | 3                      | 2,900 | 45               |
| 50               |                         |           |                         |            | 6                      |            | 61.                    |            | 9                      |            | 66.                    | 1,900 | 50               |

#### \*\*MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

| BOOM LENGTH 35'  |           | BOOM LENGTH 50'  |           | BOOM LENGTH 65'  |           | BOOM LENGTH 80'  |           | BOOM LENGTH 95'  |           | BOOM LENGTH 110' |           |
|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|
| LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) |
| 31.2             | 4,800     |                  |           |                  |           |                  |           |                  |           |                  |           |

53.  
3  
47.  
8  
52.  
4

USE THESE CHARTS WHEN ALL OUTRIGGER BEAMS ARE NOT IN EITHER THE MID OR FULLY EXTENDED POSITION





**TRUCK CRANE  
T560-1**

**LIFTING CAPACITIES** CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.

**ON OUTRIGGERS - FULLY EXTENDED WITH 7,500 LB COUNTERWEIGHT**

| LOAD<br>RADIUS<br>(FT) | BOOM LENGTH 35'                  |                      |              | BOOM LENGTH 50'                  |                      |              | BOOM LENGTH 65'                  |                      |              | LOAD<br>RADIUS<br>(FT) |
|------------------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|------------------------|
|                        | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |                        |
| 10                     | 66.7                             | 120,000*             | 120,000*     | 73.9                             | 80,000*              | 80,000*      |                                  |                      |              | 10                     |
| 12                     | 63.1                             | 103,400*             | 69,800*      | 71.5                             | 80,000*              | 80,000*      |                                  |                      |              | 12                     |
| 15                     | 57.4                             | 71,000*              | 79,100*      | 67.8                             | 78,100*              | 78,400*      |                                  |                      |              | 15                     |
| 20                     | 46.1                             | 58,300*              | 58,300*      | 61.5                             | 59,600*              | 59,600*      | 73.2                             | 61,900*              | 61,600*      | 20                     |
| 25                     | 34.5                             | 44,600*              | 41,600       | 54.8                             | 45,900*              | 42,800       | 68.5                             | 54,800*              | 56,800*      | 25                     |
| 30                     | 14.8                             | 35,300*              | 28,100       | 47.4                             | 36,800*              | 29,900       | 63.7                             | 46,600*              | 46,500       | 30                     |
| 31.2                   | 0.0                              | 20,900*              | 20,900*      | 47.4                             | 36,800*              | 29,900       | 58.6                             | 37,400*              | 30,500       | 31.2                   |
| 40                     |                                  |                      |              | 39.1                             | 30,200*              | 22,200       | 53.3                             | 30,900*              | 22,800       | 40                     |
| 45                     |                                  |                      |              | 28.8                             | 24,700               | 17,000       | 47.6                             | 25,400               | 17,700       | 45                     |
| 46.2                   |                                  |                      |              | 12.4                             | 19,800               | 13,200       | 41.3                             | 20,700               | 14,100       | 46.2                   |
| 55                     |                                  |                      |              | 0.0                              | 12,700*              | 12,300       | 34.1                             | 17,100               | 11,300       | 55                     |
| 61.2                   |                                  |                      |              |                                  |                      |              | 25.2                             | 14,200               | 9,100        | 61.2                   |
|                        |                                  |                      |              |                                  |                      |              | 0.0                              | 8,300*               | 6,900        |                        |

**USE THESE CHARTS ONLY  
WHEN ALL OUTRIGGERS  
ARE FULLY EXTENDED**


**ON OUTRIGGERS - FULLY EXTENDED WITH 7,500 LB COUNTERWEIGHT**

| LOAD<br>RADIUS<br>(FT) | BOOM LENGTH 80'                  |                      |              | BOOM LENGTH 95'                  |                      |              | BOOM LENGTH 110'                 |                      |              | LOAD<br>RADIUS<br>(FT) |
|------------------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|------------------------|
|                        | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |                        |
| 10                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 10                     |
| 12                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 12                     |
| 15                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 15                     |
| 20                     | 72.2                             | 46,200*              | 46,200*      |                                  |                      |              |                                  |                      |              | 20                     |
| 25                     | 68.9                             | 40,700*              | 40,700*      | 72.3                             | 35,300*              | 35,300*      |                                  |                      |              | 25                     |
| 30                     | 65.0                             | 36,000*              | 30,800       | 69.1                             | 31,100*              | 31,100       | 72.1                             | 27,500*              | 27,500*      | 30                     |
| 35                     | 61.0                             | 31,300*              | 23,100       | 65.9                             | 28,000*              | 23,300       | 69.3                             | 24,800*              | 23,500       | 35                     |
| 40                     | 56.8                             | 25,700               | 18,000       | 62.5                             | 25,200*              | 18,200       | 66.5                             | 22,500*              | 18,400       | 40                     |
| 45                     | 52.4                             | 21,000               | 14,400       | 59.1                             | 21,200               | 14,600       | 63.7                             | 20,600*              | 14,700       | 45                     |
| 50                     | 47.1                             | 17,500               | 11,700       | 55.5                             | 17,700               | 11,900       | 60.7                             | 17,800               | 12,000       | 50                     |
| 55                     | 42.7                             | 14,700               | 6,900        | 51.2                             | 14,900               | 9,800        | 57.7                             | 15,000               | 9,900        | 55                     |
| 60                     | 37.1                             | 12,500               | 7,900        | 47.8                             | 12,700               | 8,100        | 54.5                             | 12,800               | 8,200        | 60                     |
| 65                     | 30.6                             | 10,600               | 6,400        | 43.6                             | 10,900               | 6,700        | 51.2                             | 11,000               | 6,800        | 65                     |
| 70                     | 22.7                             | 9,100                | 5,200        | 39.0                             | 9,400                | 5,500        | 47.8                             | 6,500                | 5,700        | 70                     |
| 75                     | 9.8                              | 7,700                | 4,200        | 33.9                             | 8,100                | 4,500        | 44.2                             | 8,300                | 4,700        | 75                     |
| 76.2                   | 0.0                              | 5,500                | 3,900        | 28.1                             | 7,000                | 3,700        | 40.3                             | 7,200                | 3,900        | 76.2                   |
| 85                     |                                  |                      |              | 20.8                             | 6,000                | 2,900        | 36.1                             | 6,200                | 3,200        | 85                     |
| 90                     |                                  |                      |              | 9.0                              | 5,100                | 2,200        | 31.5                             | 5,400                | 2,500        | 90                     |
| 91.2                   |                                  |                      |              | 0.0                              | 3,600                | 2,000        | 26.0                             | 4,600                | 1,900        | 91.2                   |
| 100                    |                                  |                      |              |                                  |                      |              | 19.3                             | 3,900                | 1,400        | 100                    |
| 106.2                  |                                  |                      |              |                                  |                      |              | 0.0                              | 2,300                | 700          | 106.2                  |

**\*\*MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE**

| BOOM LENGTH 35'        |                      |              | BOOM LENGTH 50'        |                      |              | BOOM LENGTH 65'        |                      |              | BOOM LENGTH 80'        |                      |              | BOOM LENGTH 95'        |                      |              | BOOM LENGTH 110'       |                      |              |
|------------------------|----------------------|--------------|------------------------|----------------------|--------------|------------------------|----------------------|--------------|------------------------|----------------------|--------------|------------------------|----------------------|--------------|------------------------|----------------------|--------------|
| LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |
| 31.2                   | 21,000*              | 21,000*      | 46.2                   | 12,800*              | 12,500       | 61.2                   | 8,400*               | 6,900        | 76.2                   | 5,600*               | 3,900        | 91.2                   | 3,700*               | 2,000        | 106.17                 | 2,400*               | 700          |



**TRUCK CRANE  
T560-1**

**LIFTING CAPACITIES** CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.

**ON OUTRIGGERS - FULLY EXTENDED WITH 4,500 LB COUNTERWEIGHT**

| LOAD<br>RADIUS<br>(FT) | BOOM LENGTH 35'                  |                      |              | BOOM LENGTH 50'                  |                      |              | BOOM LENGTH 65'                  |                      |              | LOAD<br>RADIUS<br>(FT) |
|------------------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|------------------------|
|                        | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |                        |
| 10                     | 66.7                             | 120,000*             | 120,000*     | 73.9                             | 80,000*              | 80,000*      |                                  |                      |              | 10                     |
| 12                     | 63.1                             | 100,900*             | 95,000*      | 71.5                             | 80,000*              | 80,000*      |                                  |                      |              | 12                     |
| 15                     | 57.4                             | 78,900*              | 77,600*      | 67.8                             | 78,400*              | 78,400*      |                                  |                      |              | 15                     |
| 20                     | 47.1                             | 56,800*              | 56,800*      | 61.5                             | 58,100*              | 58,100*      | 73.2                             | 61,900*              | 61,900*      | 20                     |
| 25                     | 34.5                             | 43,400*              | 38,700*      | 54.8                             | 44,700*              | 40,200*      | 68.5                             | 54,800*              | 54,800*      | 25                     |
| 30                     | 14.8                             | 34,200*              | 26,100*      | 47.4                             | 35,700*              | 27,900*      | 63.7                             | 45,300*              | 40,900*      | 30                     |
| 31.2                   | 0.0                              | 20,900*              | 20,900*      | 39.1                             | 29,300*              | 20,600*      | 58.6                             | 36,400*              | 28,500*      | 31.2                   |
| 40                     |                                  |                      |              | 28.8                             | 22,900*              | 15,600*      | 53.3                             | 29,900*              | 21,200*      | 40                     |
| 45                     |                                  |                      |              | 12.4                             | 18,300*              | 12,000*      | 47.6                             | 23,700*              | 16,300*      | 45                     |
| 46.2                   |                                  |                      |              | 0.0                              | 12,700*              | 11,100*      | 41.3                             | 19,200*              | 12,900*      | 46.2                   |
| 55                     |                                  |                      |              |                                  |                      |              | 34.1                             | 15,800*              | 10,200*      | 55                     |
| 60                     |                                  |                      |              |                                  |                      |              | 25.2                             | 13,100*              | 8,100*       | 60                     |
| 61.2                   |                                  |                      |              |                                  |                      |              | 10.9                             | 10,900*              | 6,400*       | 61.2                   |
|                        |                                  |                      |              |                                  |                      |              | 0.0                              | 8,300*               | 6,000*       |                        |

**USE THESE CHARTS ONLY  
WHEN ALL OUTRIGGERS  
ARE FULLY EXTENDED**


**ON OUTRIGGERS - FULLY EXTENDED WITH 4,500 LB COUNTERWEIGHT**

| LOAD<br>RADIUS<br>(FT) | BOOM LENGTH 80'                  |                      |              | BOOM LENGTH 95'                  |                      |              | BOOM LENGTH 110'                 |                      |              | LOAD<br>RADIUS<br>(FT) |
|------------------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|------------------------|
|                        | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |                        |
| 10                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 10                     |
| 12                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 12                     |
| 15                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 15                     |
| 20                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 20                     |
| 25                     | 72.2                             | 46,200*              | 46,200*      |                                  |                      |              |                                  |                      |              | 25                     |
| 30                     | 68.9                             | 40,700*              | 40,700*      | 72.3                             | 35,300*              | 35,300*      |                                  |                      |              | 30                     |
| 35                     | 65.0                             | 36,000*              | 28,800*      | 69.1                             | 31,100*              | 29,000*      | 72.1                             | 27,500*              | 27,500*      | 35                     |
| 40                     | 61.0                             | 30,200*              | 21,500*      | 65.9                             | 28,000*              | 21,700*      | 69.3                             | 24,800*              | 21,800*      | 40                     |
| 45                     | 56.8                             | 24,000*              | 16,600*      | 62.5                             | 24,200*              | 16,800*      | 66.5                             | 22,500*              | 17,000*      | 45                     |
| 50                     | 52.4                             | 19,500*              | 13,200*      | 59.1                             | 19,700*              | 13,400*      | 63.7                             | 19,800*              | 13,500*      | 50                     |
| 55                     | 47.1                             | 16,200*              | 10,600*      | 55.5                             | 16,400*              | 10,800*      | 60.7                             | 16,500*              | 10,900*      | 55                     |
| 60                     | 42.7                             | 13,600*              | 8,600*       | 51.2                             | 13,800*              | 8,800*       | 57.7                             | 13,900*              | 8,900*       | 60                     |
| 65                     | 37.1                             | 11,500*              | 7,000*       | 47.8                             | 11,700*              | 7,200*       | 54.5                             | 11,800*              | 7,300*       | 65                     |
| 70                     | 30.6                             | 9,700*               | 5,600*       | 43.6                             | 10,000*              | 5,900*       | 51.2                             | 10,100*              | 6,000*       | 70                     |
| 75                     | 22.7                             | 8,200*               | 4,400*       | 39.0                             | 8,600*               | 4,800*       | 47.8                             | 8,700*               | 4,900*       | 75                     |
| 76.2                   | 9.8                              | 6,900*               | 3,400*       | 33.9                             | 7,300*               | 3,800*       | 44.2                             | 7,500*               | 4,000*       | 76.2                   |
| 85                     | 0.0                              | 5,500*               | 3,200*       | 28.1                             | 6,300*               | 3,000*       | 43.3                             | 6,500*               | 3,200*       | 85                     |
| 90                     |                                  |                      |              | 20.8                             | 5,300*               | 2,300*       | 36.1                             | 5,600*               | 2,500*       | 90                     |
| 91.2                   |                                  |                      |              | 9.0                              | 4,500*               | 1,600*       | 31.5                             | 4,800*               | 1,900*       | 91.2                   |
| 100                    |                                  |                      |              | 0.0                              | 3,600*               | 1,400*       | 26.0                             | 4,000*               | 400*         | 100                    |
| 105                    |                                  |                      |              |                                  |                      |              | 19.3                             | 3,400*               | 800*         | 105                    |
| 106.2                  |                                  |                      |              |                                  |                      |              | 8.3                              | 2,800*               |              | 106.2                  |
|                        |                                  |                      |              |                                  |                      |              | 0.0                              | 2,300*               |              |                        |

**\*\*MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE**

| BOOM LENGTH 35'        |                      |              | BOOM LENGTH 50'        |                      |              | BOOM LENGTH 65'        |                      |              | BOOM LENGTH 80'        |                      |              | BOOM LENGTH 95'        |                      |              | BOOM LENGTH 110'       |                      |              |
|------------------------|----------------------|--------------|------------------------|----------------------|--------------|------------------------|----------------------|--------------|------------------------|----------------------|--------------|------------------------|----------------------|--------------|------------------------|----------------------|--------------|
| LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |
| 31.2                   | 20,900*              | 20,900*      | 46.2                   | 12,700*              | 10,800       | 61.2                   | 8,300*               | 5,800        | 76.2                   | 5,600*               | 3,100        | 91.2                   | 3,700*               | 1,400        | 106.17                 | 2,300*               |              |



**TRUCK CRANE**  
**T560-1**

**LIFTING CAPACITIES** CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change

**SIDE STOW JIB ON FULLY EXTENDED OUTRIGGERS WITH 11,500 COUNTERWEIGHT**

| LOADED<br>BOOM<br>ANGLE<br>(DEG) | 33' OFFSETTABLE JIB             |                       |              |                                 |                       |              |                                 |                       |              | 57' OFFSETTABLE JIB             |                       |              |                                 |                       |              |                                 |                       |              | LOADED<br>BOOM<br>ANGLE<br>(DEG) |
|----------------------------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|----------------------------------|
|                                  | 0° OFFSET                       |                       |              | 15° OFFSET                      |                       |              | 30° OFFSET                      |                       |              | 0° OFFSET                       |                       |              | 15° OFFSET                      |                       |              | 30° OFFSET                      |                       |              |                                  |
|                                  | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) |                                  |
| 75                               | 39                              | 12,500*               | 12,500*      | 48                              | 8,500*                | 8,500*       | 54                              | 6,400*                | 6,400*       | 47                              | 6,500*                | 6,500*       | 64                              | 4,500*                | 4,500*       | 73                              | 3,300*                | 3,300*       | 7                                |
| 73                               | 44                              | 11,800*               | 11,800*      | 53                              | 8,100*                | 8,100*       | 59                              | 6,200*                | 6,200*       | 54                              | 6,400*                | 6,400*       | 69                              | 4,300*                | 4,300*       | 78                              | 3,200*                | 3,200*       | 5                                |
| 71                               | 49                              | 11,200*               | 11,200*      | 58                              | 7,800*                | 7,800*       | 63                              | 6,100*                | 6,100*       | 60                              | 6,200*                | 6,200*       | 75                              | 4,100*                | 4,100*       | 83                              | 3,100*                | 3,100*       | 7                                |
| 68                               | 57                              | 10,300*               | 10,300*      | 65                              | 7,500*                | 7,500*       | 70                              | 5,900*                | 5,900*       | 69                              | 6,000*                | 6,000*       | 83                              | 3,900*                | 3,900*       | 90                              | 3,000*                | 3,000*       | 3                                |
| 65                               | 64                              | 9,500*                | 9,000        | 71                              | 7,100*                | 7,100*       | 77                              | 5,900*                | 5,900*       | 78                              | 5,400*                | 5,400*       | 90                              | 3,700*                | 3,700*       | 97                              | 2,900*                | 2,900*       | 7                                |
| 62                               | 71                              | 8,800*                | 7,500        | 78                              | 6,700*                | 6,500        | 83                              | 5,600*                | 5,600*       | 86                              | 4,900*                | 4,900*       | 97                              | 3,500*                | 3,500*       | 103                             | 2,800*                | 2,800*       | 1                                |
| 59                               | 78                              | 8,200*                | 6,300        | 84                              | 6,400*                | 5,500        | 88                              | 5,400*                | 5,200        | 64                              | 4,500*                | 4,500*       | 104                             | 3,300*                | 3,300*       | 109                             | 2,700*                | 2,700*       | 6                                |
| 55                               | 86                              | 7,500                 | 4,900        | 92                              | 6,200*                | 4,400        | 96                              | 5,300*                | 4,200        | 104                             | 4,200*                | 3,600        | 113                             | 3,100*                | 3,100*       | 117                             | 2,600*                | 2,600*       | 8                                |
| 51                               | 94                              | 6,400                 | 3,700        | 99                              | 5,900*                | 3,500        | 102                             | 5,200*                | 3,300        | 113                             | 3,800*                | 2,800        | 120                             | 2,900*                | 2,600        | 124                             | 2,500*                | 2,400        | 6                                |
| 47                               | 101                             | 4,500                 | 2,900        | 105                             | 5,100                 | 2,800        | 108                             | 4,800                 | 2,600        | 121                             | 3,500*                | 2,100        | 128                             | 2,800*                | 2,000        | 130                             | 2,500*                | 1,900        | 5                                |
| 43                               | 107                             | 4,600                 | 2,200        | 111                             | 4,400                 | 2,100        | 114                             | 4,100                 | 2,000        | 128                             | 3,200                 | 1,600        | 134                             | 2,700*                | 1,500        | 136                             | 2,400*                | 1,400        | 6                                |
| 38                               | 114                             | 3,700                 | 1,600        | 118                             | 3,600                 | 1,500        | 119                             | 3,400                 | 1,400        | 136                             | 2,800                 | 1,100        | 141                             | 2,600*                | 1,000        | 142                             | 2,400*                | 900          | 2                                |
| 32                               | 122                             | 2,900                 | 900          | 125                             | 2,900                 | 900          | 125                             | 2,700                 | 800          | 144                             | 2,300                 |              | 148                             |                       |              | 149                             |                       |              | 5                                |
| 25                               | 129                             | 2,300                 |              | 131                             | 2,300                 |              |                                 |                       |              | 152                             | 1,800                 |              | 155                             | 2,200                 |              |                                 | 2,100                 |              | 9                                |
| 17                               | 135                             | 1,900                 |              | 136                             | 1,800                 |              |                                 |                       |              | 159                             | 1,400                 |              | 160                             | 0                     |              |                                 |                       |              | 5                                |
| 0                                | 141                             |                       |              |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 | 1,800                 |              |                                 |                       |              | 5                                |
|                                  |                                 | 400                   |              |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 | 0                     |              |                                 |                       |              | 5                                |
|                                  |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 | 1,400                 |              |                                 |                       |              | 1                                |
| Notes For Jib Capacities:        |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 |                       |              | 4                                |
|                                  |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 | 0                     |              |                                 |                       |              |                                  |

**Notes For Jib Capacities:**

- A. For all boom lengths less than the maximum with a jib erected, the rated loads are determined by boom angle only in the appropriate column.
- B. For boom angle not shown, use the capacity of the next lower boom angle.
- C. Listed radii are for extended main boom only.

**ON TIRES**

| RADIUS (FT) | MAX BOOM LENGTH (FT) | ALL        |         |              |
|-------------|----------------------|------------|---------|--------------|
|             |                      | STATIONARY |         | PICK & CARRY |
|             |                      | STATIC     | CREEP   | 2.5 MPH      |
| 10          | 35                   | 28,100*    | 17,700* | 11,600*      |
| 12          | 35                   | 25,500*    | 15,800* | 10,200*      |
| 15          | 35                   | 22,300*    | 13,400  | 8,300*       |
| 20          | 50                   | 18,000*    | 10,300  | 5,800*       |
| 25          | 50                   | 14,600*    | 7,600   | 3,900*       |
| 30          | 50                   | 11,900*    | 5,800   | 2,900*       |
| 35          | 50                   | 9,600      | 4,400   | 1,200*       |
| 40          | 65                   | 7,200      | 3,500   |              |
| 45          | 65                   | 5,700      | 2,700   |              |
| 50          | 65                   | 4,600      | 2,000   |              |
| 55          | 65                   | 3,600      | 1,400   |              |
| 60          | 80                   | 2,800      |         |              |
| 65          | 80                   | 1,500      |         |              |
| 70          | 95                   | 1,200      |         |              |

**Notes For Tire Capacities:**

- A. For Pick and Carry operations, boom must be centered over the front of the crane with swing brake and lock engaged. Use minimum boom point height and keep load close to ground surface.
- B. The load should be restrained from swinging. NO ON TIRE OPERATION WITH JIB ERECTED.
- C. Without outriggers, never maneuver the boom beyond listed load radii for applicable tires to ensure stability.
- D. Creep speed is crane movement of less than 200' (61 m) in a 30 minute period and not exceeding 1.0 mph (1.6 km/h).
- E. Refer to General Notes for additional information.

**MAXIMUM PERMISSIBLE HOIST LINE LOAD**

| LINE PARTS                                                                                                                                                                                                                       | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8       | 9       | 10      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|
| MAIN & AUX. HOIST                                                                                                                                                                                                                | 138,00 | 27,600 | 41,400 | 55,200 | 69,000 | 82,800 | 96,600 | 100,400 | 124,200 | 130,000 |
| WIRE ROPE: 3/4" ROTATION RESISTANT 34X7 COMPACTED STRAND, GRADE 2160, MINIMUM BREAKING STRENGTH - 34.5 TONS. 3/4" 6X19 OR 6X37, IPS, IWRC, PERFORMED RIGHT REGULAR LAY MINIMUM BREAKING STRENGTH - 25.6 TONS. WEIGHT 1.04 LB/FT. |        |        |        |        |        |        |        |         |         |         |



TEREX

TRUCK CRANE  
**T560-1**


LIFTING CAPACITIES

CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with

ON OUTRIGGERS - FULLY EXTENDED WITH 15,400 LB COUNTERWEIGHT

| LOAD<br>RADIUS<br>(FT) | BOOM LENGTH 35'                  |                      |              | BOOM LENGTH 50'                  |                      |              | BOOM LENGTH 65'                  |                      |              | LOAD<br>RADIUS<br>(FT) |
|------------------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|------------------------|
|                        | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |                        |
| 10                     | 66.7                             | 120,000*             | 120,000*     | 73.9                             | 80,000*              | 80,000*      |                                  |                      |              | 10                     |
| 12                     | 63.1                             | 107,000*             | 100,700*     | 71.5                             | 80,000*              | 80,000*      |                                  |                      |              | 12                     |
| 15                     | 57.5                             | 87,100*              | 82,800*      | 67.8                             | 78,400*              | 78,400*      | 73.2                             | 61,900*              | 61,900*      | 15                     |
| 20                     | 47.1                             | 62,900*              | 62,500*      | 61.5                             | 63,300*              | 63,300*      | 68.5                             | 54,800*              | 54,800*      | 20                     |
| 25                     | 34.5                             | 48,300*              | 48,300*      | 54.8                             | 49,600*              | 49,600*      | 63.7                             | 49,100*              | 49,100*      | 25                     |
| 30                     | 14.8                             | 36,800*              | 36,700       | 47.4                             | 39,900*              | 38,600       | 58.6                             | 40,500*              | 39,100       | 30                     |
| 31.2                   | 0.0                              | 20,900*              | 20,900*      | 39.1                             | 32,800*              | 29,100       | 53.3                             | 33,500*              | 29,700       | 31.2                   |
| 40                     |                                  |                      |              | 28.8                             | 27,500*              | 22,700       | 47.6                             | 28,300*              | 23,400       | 40                     |
| 45                     |                                  |                      |              | 12.4                             | 22,200*              | 18,100       | 41.3                             | 24,200*              | 19,000       | 45                     |
| 46.2                   |                                  |                      |              | 0.0                              | 12,700*              | 12,700       | 34.1                             | 20,800*              | 15,600       | 46.2                   |
| 50                     |                                  |                      |              |                                  |                      |              | 34.1                             | 17,900               | 12,900       | 50                     |
| 55                     |                                  |                      |              |                                  |                      |              | 25.2                             | 17,900               | 12,900       | 55                     |
| 60                     |                                  |                      |              |                                  |                      |              | 10.9                             | 14,700               | 10,700       | 60                     |
| 61.2                   |                                  |                      |              |                                  |                      |              | 0.0                              | 8,300*               | 8,300*       | 61.2                   |

USE THESE CHARTS ONLY  
WHEN ALL OUTRIGGERS  
ARE FULLY EXTENDED




**TEREX**
**TRUCK CRANE  
T560-1**
**LIFTING CAPACITIES**
**CAUTION:** Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change

**ON OUTRIGGERS - FULLY EXTENDED WITH 15,400 LB COUNTERWEIGHT**

| LOAD<br>RADIUS<br>(FT) | BOOM LENGTH 80'                  |                      |              | BOOM LENGTH 95'                  |                      |              | BOOM LENGTH 110'                 |                      |              | LOAD<br>RADIUS<br>(FT) |
|------------------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|----------------------------------|----------------------|--------------|------------------------|
|                        | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) | LOADED<br>BOOM<br>ANGLE<br>(DEG) | OVER<br>REAR<br>(LB) | 360°<br>(LB) |                        |
| 10                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 10                     |
| 12                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 12                     |
| 15                     |                                  |                      |              |                                  |                      |              |                                  |                      |              | 15                     |
| 20                     | 72.7                             | 46,200*              | 46,200*      |                                  |                      |              |                                  |                      |              | 20                     |
| 25                     | 68.9                             | 40,700*              | 40,700*      | 72.3                             | 35,300*              | 35,300*      |                                  |                      |              | 25                     |
| 30                     | 65.0                             | 36,000*              | 36,000*      | 69.1                             | 28,000*              | 26,700*      | 69.3                             | 24,800*              | 24,800*      | 30                     |
| 35                     | 61.0                             | 32,200*              | 26,500       | 65.9                             | 28,000*              | 28,000*      | 69.3                             | 24,800*              | 24,800*      | 35                     |
| 40                     | 56.8                             | 28,700*              | 23,800       | 62.5                             | 25,200*              | 24,000       | 66.5                             | 22,500*              | 22,500*      | 40                     |
| 45                     | 52.4                             | 24,600*              | 19,300       | 59.1                             | 23,100*              | 19,500       | 63.7                             | 20,600*              | 19,600       | 45                     |
| 50                     | 47.1                             | 21,300*              | 16,000       | 55.5                             | 21,300*              | 16,200       | 60.7                             | 18,800*              | 16,300       | 50                     |
| 55                     | 42.7                             | 18,400               | 13,400       | 51.2                             | 18,600               | 13,600       | 57.7                             | 17,400*              | 13,700       | 55                     |
| 60                     | 37.1                             | 15,800               | 11,300       | 47.8                             | 16,000               | 11,500       | 54.5                             | 16,200               | 11,700       | 60                     |
| 65                     | 30.6                             | 13,600               | 9,600        | 43.6                             | 13,900               | 9,800        | 51.2                             | 14,100               | 10,000       | 65                     |
| 70                     | 22.7                             | 11,900               | 8,100        | 39.0                             | 12,200               | 8,400        | 47.8                             | 12,300               | 8,600        | 70                     |
| 75                     | 9.8                              | 10,300               | 6,800        | 33.9                             | 10,700               | 7,200        | 44.2                             | 10,900               | 7,400        | 75                     |
| 76.2                   | 0.0                              | 5,500*               | 5,500        | 28.1                             | 9,400                | 6,200        | 40.3                             | 9,600                | 6,400        | 76.2                   |
| 85                     |                                  |                      |              | 20.8                             | 8,200                | 5,200        | 36.1                             | 8,500                | 5,500        | 85                     |
| 90                     |                                  |                      |              | 9.0                              | 7,200                | 4,400        | 31.5                             | 7,500                | 4,700        | 90                     |
| 91.2                   |                                  |                      |              | 0.0                              | 3,600*               | 3,600        | 26.0                             | 6,600                | 4,000        | 91.2                   |
| 100                    |                                  |                      |              |                                  |                      |              | 19.3                             | 5,800                | 3,300        | 100                    |
| 106.2                  |                                  |                      |              |                                  |                      |              | 8.3                              | 5,100                | 2,700        | 106.2                  |

**\*\*MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE**

| BOOM LENGTH 35'        |                       |              | BOOM LENGTH 50'        |                       |              | BOOM LENGTH 65'        |                       |              | BOOM LENGTH 80'        |                       |              | BOOM LENGTH 95'        |                       |              | BOOM LENGTH 110'       |                       |              |
|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|------------------------|-----------------------|--------------|
| LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(FT) | OVER<br>FRONT<br>(LB) | 360°<br>(LB) |
| 31.2                   | 21,000*               | 21,000*      | 46.2                   | 12,800*               | 12,600*      | 61.2                   | 8,400*                | 8,300        | 76.2                   | 5,600*                | 5,000        | 91.2                   | 3,700*                | 2,900        | 106.17                 | 2,400*                | 1,500        |



### TRUCK CRANE T560-1

**LIFTING CAPACITIES** CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.

#### ON OUTRIGGERS - MID POSITION AND WITH 15,400 LB COUNTERWEIGHT

| LOAD RADIUS (FT) | BOOM LENGTH 35'         |           | BOOM LENGTH 50'         |            | BOOM LENGTH 65'        |            | BOOM LENGTH 80'        |            | BOOM LENGTH 95'        |            | BOOM LENGTH 110'       |        | LOAD RADIUS (FT) |
|------------------|-------------------------|-----------|-------------------------|------------|------------------------|------------|------------------------|------------|------------------------|------------|------------------------|--------|------------------|
|                  | LOADED BOOM ANGLE (DEG) | 360° (LB) | LOADED BOOM ANGLE (DEG) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | (DEG)  |                  |
| 10               | 66.7                    | 105,200*  | 73.9                    | 80,000*    |                        |            |                        |            |                        |            |                        |        | 10               |
| 12               | 63.1                    | 90,000*   | 71.5                    | 80,000*    |                        |            |                        |            |                        |            |                        |        | 12               |
| 15               | 57.4                    | 73,100*   | 67.8                    | 74,200*    | 73.2                   | 61,900*    |                        |            |                        |            |                        |        | 15               |
| 20               | 47.1                    | 41,300    | 61.5                    | 42,600     | 68.5                   | 43,200     | 72.7                   | 43,600     |                        |            |                        |        | 20               |
| 25               | 34.5                    | 27,000    | 54.8                    | 28,500     | 63.7                   | 29,000     | 68.9                   | 29,300     | 72.                    | 29,500     |                        |        | 25               |
| 30               | 14.8                    | 18,700    | 47.4                    | 20,400     | 58.6                   | 21,000     | 65.0                   | 21,300     | 7.                     | 21,500     | 72.                    | 21,600 | 30               |
| 31.2             | 0.0                     | 17,100    | 39.1                    | 15,200     | 53.3                   | 15,900     | 61.0                   | 16,100     | 69.                    | 16,300     | 1.                     | 16,500 | 31.2             |
| 40               |                         |           | 28.8                    | 11,500     | 47.6                   | 12,200     | 56.8                   | 12,600     | 1.                     | 12,800     | 69.                    | 12,900 | 40               |
| 45               |                         |           | 12.4                    | 8,700      | 41.3                   | 9,500      | 52.4                   | 9,900      | 65.                    | 10,100     | 3.                     | 10,300 | 45               |
| 46.2             |                         |           | 0.0                     | 8,000      | 34.1                   | 7,400      | 46.1                   | 7,900      | 9.                     | 8,100      | 66.                    | 8,200  | 46.2             |
| 55               |                         |           |                         |            | 25.2                   | 5,800      | 42.7                   | 6,200      | 62.                    | 6,500      | 5.                     | 6,600  | 55               |
| 60               |                         |           |                         |            | 10.9                   | 4,400      | 37.1                   | 4,900      | 5.                     | 5,200      | 63.                    | 5,300  | 60               |
| 61.2             |                         |           |                         |            | 0.0                    | 4,000      | 30.6                   | 3,800      | 59.                    | 4,100      | 7.                     | 4,300  | 61.2             |
| 70               |                         |           |                         |            |                        |            | 22.7                   | 2,800      | 1.                     | 3,100      | 60.                    | 3,300  | 70               |
| 75               |                         |           |                         |            |                        |            | 9.8                    | 2,000      | 55.                    | 2,300      | 7.                     | 2,500  | 75               |

#### \*\*MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

| BOOM LENGTH 35'  |           | BOOM LENGTH 50'  |           | BOOM LENGTH 65'  |           | BOOM LENGTH 80'  |           | BOOM LENGTH 95'  |           | BOOM LENGTH 110' |           |
|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|
| LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) |
| 31.2             | 13,400    | 46.2             | 5,900     | 61.2             | 2,500     |                  |           |                  |           |                  |           |

USE THESE CHARTS ONLY WHEN ALL OUTRIGGERS ARE PINNED IN MID POSITION



#### ON OUTRIGGERS - RETRACTED AND WITH 15,400 LB COUNTERWEIGHT

| LOAD RADIUS (FT) | BOOM LENGTH 35'         |           | BOOM LENGTH 50'         |            | BOOM LENGTH 65'        |            | BOOM LENGTH 80'        |            | BOOM LENGTH 95'        |            | BOOM LENGTH 110'       |        | LOAD RADIUS (FT) |
|------------------|-------------------------|-----------|-------------------------|------------|------------------------|------------|------------------------|------------|------------------------|------------|------------------------|--------|------------------|
|                  | LOADED BOOM ANGLE (DEG) | 360° (LB) | LOADED BOOM ANGLE (DEG) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | 360° (DEG) | LOADED BOOM ANGLE (LB) | (DEG)  |                  |
| 10               | 66.7                    | 61,700    | 73.9                    | 60,900     |                        |            |                        |            |                        |            |                        |        | 10               |
| 12               | 63.1                    | 44,700    | 71.5                    | 45,700     |                        |            |                        |            |                        |            |                        |        | 12               |
| 15               | 57.4                    | 30,300    | 67.8                    | 31,500     | 73.2                   | 32,000     |                        |            |                        |            |                        |        | 15               |
| 20               | 47.1                    | 18,200    | 61.5                    | 19,500     | 68.5                   | 20,000     | 72.                    | 20,300     |                        |            |                        |        | 20               |
| 25               | 34.5                    | 11,700    | 54.8                    | 13,100     | 63.7                   | 13,700     | 7.                     | 13,900     | 72.                    | 14,100     |                        |        | 25               |
| 30               | 14.8                    | 7,600     | 47.4                    | 9,000      | 58.6                   | 9,700      | 68.                    | 10,000     | 3.                     | 10,200     | 72.                    | 10,300 | 30               |
| 31.2             | 0.0                     | 6,700     | 39.1                    | 6,300      | 53.3                   | 7,000      | 9.                     | 7,300      | 69.                    | 7,500      | 1.                     | 7,600  | 31.2             |
| 40               |                         |           | 28.8                    | 4,300      | 47.6                   | 5,000      | 65.                    | 5,300      | 1.                     | 5,600      | 69.                    | 5,700  | 40               |
| 45               |                         |           |                         | 2,700      | 41.3                   | 3,500      | 0.                     | 3,800      | 65.                    | 4,100      | 3.                     | 4,200  | 45               |
| 46.2             |                         |           |                         |            | 2300                   | 2,300      | 61.                    | 2,700      | 9.                     | 2,900      | 66.                    | 3,100  | 50               |
| 55               |                         |           |                         |            |                        |            | 0.                     |            | 62.                    | 2,000      | 5.                     | 2,100  | 55               |

#### \*\*MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

| BOOM LENGTH 35'  |           | BOOM LENGTH 50'  |           | BOOM LENGTH 65'  |           | BOOM LENGTH 80'  |           | BOOM LENGTH 95'  |           | BOOM LENGTH 110' |           |
|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|------------------|-----------|
| LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) | LOAD RADIUS (FT) | 360° (LB) |
| 31.2             | 4,000     |                  |           |                  |           |                  |           |                  |           |                  |           |

USE THESE CHARTS WHEN ALL OUTRIGGER BEAMS ARE NOT IN EITHER THE MID OR FULLY EXTENDED POSITION





**TRUCK CRANE**  
**T560-1**

**LIFTING CAPACITIES** CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change

**SIDE STOW JIB ON FULLY EXTENDED OUTRIGGERS WITH 15,400 COUNTERWEIGHT**

| LOADED<br>BOOM<br>ANGLE<br>(DEG) | 57° OFFSETTABLE JIB             |                       |              |                                 |                       |              |                                 |                       |              | 33° OFFSETTABLE JIB             |                       |              |                                 |                       |              |                                 |                       |              | LOADED<br>BOOM<br>ANGLE<br>(DEG) |
|----------------------------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|---------------------------------|-----------------------|--------------|----------------------------------|
|                                  | 0° OFFSET                       |                       |              | 15° OFFSET                      |                       |              | 30° OFFSET                      |                       |              | 0° OFFSET                       |                       |              | 15° OFFSET                      |                       |              | 30° OFFSET                      |                       |              |                                  |
|                                  | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) | LOAD<br>RADIUS<br>(REF)<br>(FT) | FRONT<br>ONLY<br>(LB) | 360°<br>(LB) |                                  |
| 75                               | 48                              | 6,500*                | 6,500*       | 63                              | 4,500*                | 4,500*       | 73                              | 3,300                 | 3,300*       | 37                              | 12,500*               | 12,500*      | 48                              | 8,500*                | 8,500*       | 54                              | 6,40                  | 6,40         | 75                               |
| 73                               | 54                              | 6,400*                | 6,400*       | 69                              | 4,300*                | 4,300*       | 78                              | 3,200                 | 3,200*       | 43                              | 11,800*               | 11,800*      | 53                              | 8,100*                | 8,100*       | 59                              | 0                     | 0            | 73                               |
| 71                               | 60                              | 6,200*                | 6,200*       | 74                              | 4,100*                | 4,100*       | 83                              | 3,100                 | 3,100*       | 48                              | 11,200*               | 11,200*      | 58                              | 7,800*                | 7,800*       | 63                              | 6,20                  | 6,20         | 71                               |
| 68                               | 69                              | 6,000*                | 6,000*       | 82                              | 3,900*                | 3,900*       | 90                              | 3,000                 | 3,000*       | 56                              | 10,300*               | 10,300*      | 65                              | 7,500*                | 7,500*       | 70                              | 0                     | 0            | 68                               |
| 65                               | 78                              | 5,400*                | 5,400*       | 90                              | 3,700*                | 3,700*       | 97                              | 2,900                 | 2,900*       | 64                              | 9,500*                | 9,500*       | 72                              | 7,100*                | 7,100*       | 76                              | 6,10                  | 6,10         | 65                               |
| 62                               | 86                              | 4,900*                | 4,900*       | 97                              | 3,500*                | 3,500*       | 103                             | 2,800                 | 2,800*       | 71                              | 8,800*                | 8,700        | 78                              | 6,700*                | 6,700*       | 82                              | 0                     | 0            | 62                               |
| 59                               | 94                              | 4,500*                | 4,500*       | 104                             | 3,300*                | 3,300*       | 109                             | 2,700                 | 2,700*       | 78                              | 8,200*                | 7,400        | 74                              | 6,400*                | 6,400*       | 88                              | 5,90                  | 5,90         | 59                               |
| 55                               | 103                             | 4,200*                | 4,200*       | 112                             | 3,100*                | 3,100*       | 117                             | 2,600                 | 2,600*       | 86                              | 7,600*                | 4,900        | 92                              | 6,200*                | 5,400        | 950                             | 0                     | 0            | 55                               |
| 51                               | 112                             | 3,800*                | 3,700        | 120                             | 2,900*                | 2,900*       | 124                             | 2,500                 | 2,500*       | 940                             | 7,100*                | 4,800        | 99                              | 5,900*                | 4,400        | 102                             | 5,90                  | 5,90         | 51                               |
| 47                               | 120                             | 3,500*                | 3,000        | 127                             | 2,800*                | 2,700        | 130                             | 2,500                 | 2,500*       | 101                             | 6,100                 | 3,800        | 106                             | 5,600*                | 3,600        | 108                             | 0                     | 0            | 47                               |
| 43                               | 128                             | 3,300*                | 2,400        | 134                             | 2,700*                | 2,200        | 136                             | 2,400                 | 2,100        | 108                             | 5,300                 | 3,100        | 112                             | 5,000                 | 2,900        | 114                             | 5,60                  | 5,60         | 43                               |
| 38                               | 136                             | 6,100*                | 1,800        | 141                             | 2,600*                | 1,700        | 1420                            | 2,400                 | 1,600        | 115                             | 4,400                 | 2,400        | 118                             | 4,300                 | 2,200        | 120                             | 0                     | 0            | 38                               |
| 32                               | 145                             | 2,800*                | 1,300        | 148                             | 2,500*                | 1,100        | 149                             | 2,400                 | 1,200        | 123                             | 3,600                 | 1,700        | 125                             | 3,500                 | 1,600        | 126                             | 5,40                  | 5,40         | 32                               |
| 25                               | 153                             | 2,300                 | 700          | 155                             |                       |              |                                 |                       |              | 130                             | 3,000                 | 1,000        | 131                             | 2,900                 | 900          |                                 | 0                     | 0            | 25                               |
| 17                               | 159                             | 1,900                 |              | 160                             | 1,30                  |              |                                 |                       |              | 136                             | 2,500                 |              | 136                             | 2,400                 |              |                                 | 5,30                  | 5,10         | 17                               |
| 0                                | 164                             |                       |              |                                 | 0                     |              |                                 |                       |              | 139                             | 400                   |              |                                 |                       |              |                                 | 0                     | 0            | 0                                |
|                                  |                                 | 300                   |              |                                 | 1,90                  |              |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 | 8,50                  | 4,20         |                                  |
|                                  |                                 |                       |              |                                 | 0                     |              |                                 |                       |              |                                 |                       |              |                                 |                       |              |                                 | 0                     | 0            |                                  |

**Notes For Jib Capacities:**

- A. For all boom lengths less than the maximum with a jib erected, the rated loads are determined by boom angle only in the appropriate column.  
B. For boom angle not shown, use the capacity of the next lower boom angle.  
C. Listed radii are for extended main boom only.

**ON TIRES**

| RADIUS<br>(FT) | MAX<br>BOOM<br>LENGTH<br>(FT) | ALL        |         |              |
|----------------|-------------------------------|------------|---------|--------------|
|                |                               | STATIONARY |         | PICK & CARRY |
|                |                               | STATIC     | CREEP   | 2.5 MPH      |
| 10             | 35                            | 26,800*    | 16,400* | 10,300*      |
| 12             | 35                            | 24,300*    | 14,600* | 8,900*       |
| 15             | 35                            | 21,100*    | 12,300* | 7,200*       |
| 20             | 25                            | 17,000*    | 9,300*  | 4,900*       |
| 25             | 50                            | 13,800*    | 7,000*  | 3,100*       |
| 30             | 50                            | 11,100*    | 5,100*  |              |
| 35             | 50                            | 9,200*     | 3,700*  |              |
| 40             | 65                            | 7,800*     | 2,800*  |              |
| 45             | 65                            | 6,700*     | 2,100*  |              |
| 50             | 65                            | 5,700*     |         |              |
| 55             | 65                            | 4,800*     |         |              |
| 60             | 80                            | 3,800      |         |              |
| 65             | 80                            | 3,000      |         |              |
| 70             | 95                            | 2,300      |         |              |
| 75             | 95                            | 1,800      |         |              |

**Notes For On Tire Capacities:**

- A. For Pick and Carry operations, boom must be centered over the front of the crane with swing brake and lock engaged. Use minimum boom point height and keep load close to ground surface.  
B. The load should be restrained from swinging. NO ON TIRE OPERATION WITH JIB ERECTED.  
C. Without outriggers, never maneuver the boom beyond listed load radii for applicable tires to ensure stability.  
D. Creep speed is crane movement of less than 200' (61 m) in a 30 minute period and not exceeding 1.0 mph (1.6 km/h).  
E. Refer to General Notes for additional information.

**MAXIMUM PERMISSIBLE HOIST LINE LOAD**

| LINE PARTS                                                                                                                                                                                                                             | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8       | 9       | 10      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|
| MAIN & AUX. HOIST                                                                                                                                                                                                                      | 138,00 | 27,600 | 41,400 | 55,200 | 69,000 | 82,800 | 96,600 | 100,400 | 124,200 | 130,000 |
| WIRE ROPE: 3/4" ROTATION RESISTANT 34X7 COMPACTED STRAND, GRADE 2160, MINIMUM BREAKING STRENGTH - 34.5 TONS.<br>3/4" 6X19 OR 6X37, IPS, IWRC, PERFORMED RIGHT REGULAR LAY MINIMUM BREAKING STRENGTH - 25.6 TONS.<br>WEIGHT 1.04 LB/FT. |        |        |        |        |        |        |        |         |         |         |



## General Notes | T500-1 Series

## Cranes |

### GENERAL

- Rated loads as shown on Lift Charts pertain to this machine as originally manufactured and equipped. Modifications to the machine or use of optional equipment or other than that specified can result in a reduction of capacity.
- Construction equipment can be hazardous if improperly operated or maintained. Operation and maintenance of this machine shall be in compliance with the information in the Operator's, Parts and Safety Manuals supplied with this machine. If These manuals are missing, order replacements from the manufacturer through your distributor.
- These warnings do not constitute all of the operating conditions for the crane. The operator and job site supervision must read the OPERATORS MANUAL, CIMA SAFETY MANUAL, APPLICABLE OSHA REGULATIONS, AND SOCIETY OF MECHANICAL ENGINEERS (ASME) SAFETY STANDINGS FOR CRANES.
- This crane and its load ratings are in accordance with POWER CRANE & SHOVEL ASSOCIATION, STANDARD NO. 4 SAE CRANE LOAD STABILITY TEST CODE J765A, SAE METHOD OF TEST FOR CRANE STRUCTURE J1063 AND APPLICABLE SAFETY CODE FOR CRANES, DERRICKS AND HOISTS, ASME/ANSI B30.5

### DEFINITIONS

- LOAD RADIUS** - The horizontal distance from the axis of rotation before loading to the center of the vertical hoist line or tackle with a load applied.
- LOADED BOOM ANGLE** - It is the angle between the boom base section and the horizontal, after lifting the rated load at the rated radius. The boom angle before loading should be greater to account for deflections. The loaded boom angle combined with g, boom length give only an approximation of the operating radius.
- WORKING AREA** - Areas measured in a circular arc about the centerline of rotation as shown in the diagram.
- FREELY SUSPENDED LOAD** - Load hanging free with no direct external force applied except by the hoist rope.
- SIDE LOAD** - Horizontal force applied to the lifted load either on the ground or in the air.
- NO LOAD STABILITY LIMIT** - The stability limit radius shown on the range diagrams is the radius beyond which it is not permitted to position the boom, when the boom angle is less than the minimum shown on the applicable load chart, because the machine can overturn without any load.
- BOOM SIDE OF CRANE** - The side of the crane over which the boom is positioned when in OVERSIDE working position.

### SET-UP

- Crane load ratings are based on the crane being leveled and standing on a firm, uniform supporting surface.
- Crane load ratings on outriggers are based on all outrigger beams being fully extended or in the case of partial extension ratings mechanically pinned in the appropriate position, and the tires free of the supporting surface.
- Crane load ratings on tires depend on appropriate inflation pressure and the tire conditions. Caution must be exercised when increasing air pressures in tires. Consult Operator's Manual for precautions.
- Use of jibs, lattice-type boom extensions, or fourth section pullouts extended is not permitted for pick and carry operations.
- Consult appropriate section of the Operator's and Service Manual for more exact description of hoist line reeving.
- The use of more parts of line than required by the load may result in having insufficient rope to allow the hook block to reach the ground.
- Properly maintained wire rope is essential for safe crane operation. Consult Operator's Manual for proper maintenance and inspection requirements.
- When spin-resistant wire rope is used, the allowable rope loading shall be the breaking strength divided by five (5), unless otherwise specified by the wire rope manufacturer.
- Do not elevate the boom above 60° unless the boom is positioned in-line with the crane's chassis or the outrigger are extended. Failure to observe this warning may result in loss of stability.

### OPERATION

- CRANE LOAD RATINGS MUST NOT BE EXCEEDED. DO NOT ATTEMPT TO TIP THE CRANE TO DETERMINE ALLOWABLE LOADS.**
- When either radius or boom length, or both, are between listed values, the smaller of the two listed load ratings shall be used.
- Do not operate at longer radii than those listed on the applicable load rating chart (cross hatched areas shown on range diagrams.)
- The boom angles shown on the Capacity Chart give an approximation of the operating radius for a specified boom length. The boom angle, before loading, should be greater to account for boom deflection. It may be necessary to retract the boom if maximum boom angle is insufficient to maintain rated radius.  
Power telescoping boom sections must be extended equally.  
Rated loads include the weight of hook block, slings, and auxiliary lifting devices. Their weights shall be subtracted from the listed rated load to obtain the net load that can be lifted. When lifting over the jib the weight of any hook block, slings, and auxiliary lifting devices at the boom head must be added to the load. When jibs are erected but unused add two (2) times the weight of any hook block, slings, and auxiliary lifting devices at the jib head to the load.  
Rated loads do not exceed 85% on outriggers or 75% on tires, of the tipping load as determined by SAE Crane Stability Test Code J765a. Structural strength ratings in chart are indicated with an asterisk (\*).  
Rated loads are based on freely suspended loads. No attempt shall be made to drag a load horizontally on the ground in any direction.  
The user shall operate at reduced ratings to allow for adverse job conditions, such as: soft or uneven ground, out of level conditions, high winds, side loads, pendulum action, jerking or sudden stopping of loads, hazardous conditions, experience of personnel, two machine lifts, traveling with loads, electric wires, etc. (side pull on boom or jib is hazardous). Derating of the crane's lifting capacity is required when wind speed exceeds 20 MPH. The center of the lifted load must never be allowed to move more than 3" off the center line of the base boom section due to the effects of wind, inertia, or any combination of the two.  
\*\*Use 2' off the center line of the base boom for a two section boom, 3' for a three section boom, or 4' for a four section boom.  
The maximum load which can be telescoped is not definable, because of variations in loadings and crane maintenance, but it is permissible to attempt retraction and extension if load ratings are not exceeded.
- Load ratings are dependent upon the crane being maintained according to manufacturer's specifications.
- It is recommended that load handling devices, including hooks, and hook blocks, be kept away from boom head at all times.
- FOR TRUCK CRANES ONLY:** 360° capacities apply only to machines equipped with a front outrigger jack and all five (5) outrigger jacks properly set. If the front (5th) outrigger jack is not properly set, the work area is restricted to the over side and over rear areas as shown on the Crane Working Positions diagram. Use the 360° load ratings in the overside work areas.  
Do not lift with outrigger beams positioned between the fully extended and intermediate (pinned) positions.
- Truck Cranes not equipped with equalizing (bogie) beams between the rear axles may not be used for lifting "on tires". Truck Cranes equipped with equalizing beams and rear air suspension should "dump" the air before lifting "on tires".

### CLAMSHELL, MAGNET, AND CONCRETE BUCKET SERVICE

- Maximum boom length for clamshell and magnet service is 50'.
- Weight of clamshell or magnet, plus contents are not to exceed 6,000 lb or 90% of rated lifting capacities, whichever is less. For concrete bucket operation, weight of bucket and load must not exceed 90% of rated lifting capacity.

**TEREX Cranes**  
106-12th Street S.E.  
Waverly, Iowa 50677-9466 USA

TEL (319) 352-3920 FAX (319) 352-5727  
EMAIL [inquire@terexwaverly.com](mailto:inquire@terexwaverly.com)  
WEB [terex.com](http://terex.com)

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS OUR STANDARD WRITTEN WARRANTY APPLICABLE TO THE PARTICULAR PRODUCT.  
WE MAKE NO OTHER WARRANTY, EXPRESSED OR IMPLIED.

©TEREX CRANES, INC. 2005

PRINTED IN U.S.A.

FEBRUARY 25, 2005