




Range Diagram and Lifting Capacity | T775

Cranes


75 TON LIFTING CAPACITY

RANGE DIAGRAM 40' - 126' BOOM




Dimensions are for largest factory furnished hook block and hook & ball, with anti-two block activated

COUNTER WEIGHT	F.BUMPER 1,000 LB
BOOM LENGTH	40'-126'
UPPERSTRUCTURE	W/AUX WINCH 13,450 LB W/O AUX WINCH 15,000 LB
STABILITY PERCENTAGE	ON OUTRIGGERS 85% ON TIRES 75%
PCSA CLASS	10-326

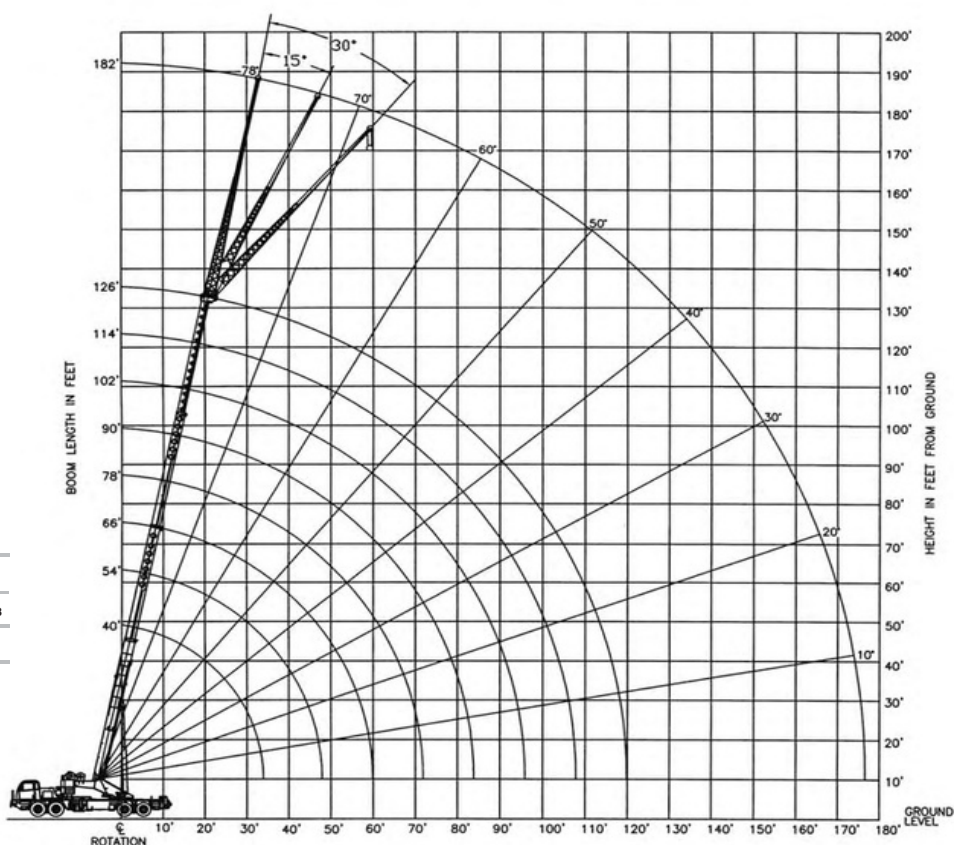

CRANE WORKING CONDITIONS

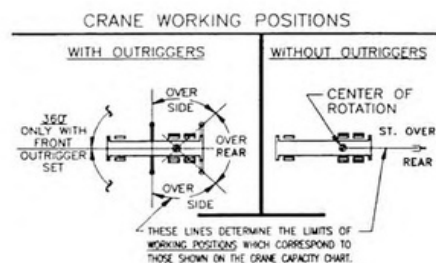

REDUCTION IN MAIN BOOM CAPACITY

All jib in stowed position	0 lb
Aux.boom in head sheave	100lb

HOOK BLOCK WEIGHTS

12T Hook & ball	419 lb
75T hook block (6 sheave)	1608 lb



TRUCK CRANE
1775

LIFTING CAPACITIES CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.


ON OUTRIGGERS - FULLY EXTENDED AND WITH 15,000 LB COUNTERWEIGHT

LOAD RADIUS (FT)	BOOM LENGTH 40'			BOOM LENGTH 54'			BOOM LENGTH 66'			BOOM LENGTH 78'			LOAD RADIUS (FT)
	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	
10	69.4	150,000*	150,000*	74.9	102,600*	102,600*							10
12	66.2	125,700*	125,700*	72.7	102,600*	102,600*							12
15	61.2	109,000*	109,000*	69.3	100,600*	100,600*	73.2	80,700*	80,700*				15
20	52.3	84,600*	83,900*	63.4	85,400*	84,900*	68.5	72,000*	72,000*	72.0	62,300*	62,300*	20
25	41.9	65,600*	65,600*	57.1	66,800*	66,800*	63.7	64,900*	64,900*	68.1	55,800*	55,800*	25
30	28.4	52,900	52,900*	50.2	53,700	53,700*	58.7	54,100	54,100*	64.0	49,800*	49,800*	30
35	**			43.1	41,000	41,000*	53.3	41,600	41,600*	59.7	41,800	41,800*	35
40				33.5	32,600	32,600	47.5	33,200	33,200	55.3	33,500	33,500	40
45				20.9	26,500	26,500	41.0	27,200	27,200	50.6	27,500	27,500	45
50				**			33.5	22,600	22,600	45.5	23,000	23,000	50
55							23.9	19,100	19,100	39.9	19,500	19,500	55
60							**			33.5	16,700	16,700	60
65										25.7	14,300	14,300	65
70										14.0	12,400	12,400	70
75										**			75

****MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE**

BOOM LENGTH 40'			BOOM LENGTH 54'			BOOM LENGTH 66'			BOOM LENGTH 78'		
LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)
33.9	28,600*	28,600*	47.9	19,100*	19,100*	59.9	14,200*	14,200*	71.9	10,800*	10,800*

USE THESE CHARTS ONLY
WHEN ALL OUTRIGGERS
ARE FULLY EXTENDED



ON OUTRIGGERS - FULLY EXTENDED AND WITH 15,000 LB COUNTERWEIGHT

LOAD RADIUS (FT)	BOOM LENGTH 90'			BOOM LENGTH 102'			BOOM LENGTH 114'			BOOM LENGTH 126'			LOAD RADIUS (FT)
	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	
20	74.5	56,300*	56,300*										20
25	71.2	48,100*	48,100*	73.5	42,000*	42,000*							25
30	67.7	41,800*	41,800*	70.5	36,500*	36,500*	72.6	31,600*	31,600*				30
35	64.2	36,700*	36,700*	67.4	32,200*	32,200*	70.0	29,600*	29,600*	71.	24,800*	24,800*	35
40	60.5	33,000*	33,000*	64.3	28,700*	28,700*	67.2	26,300*	26,300*	9	24,700*	24,700*	40
45	56.7	27,700	27,700	61.1	25,800*	25,800*	64.4	23,600*	23,600*	69.	22,200*	22,200*	45
50	52.8	23,200	23,200	57.8	23,400	23,400*	61.5	21,500*	21,500*	5	20,100*	20,100*	50
55	48.5	19,800	19,800	54.4	19,900	19,900	58.6	19,600*	19,600*	67.	18,300*	18,300*	55
60	44.0	16,900	16,900	50.8	17,100	17,100	55.6	17,200	17,200	0	16,700*	16,700*	60
65	39.1	14,600	14,600	47.0	14,800	14,800	52.5	14,900	14,900	64.	15,000	15,000	65
70	33.5	12,700	12,700	42.9	12,900	12,900	49.1	13,000	13,000	5	13,100	13,100	70
75	26.9	11,100	11,100	38.5	11,200	11,200	45.7	11,400	11,400	62.	11,500	11,500	75
80	18.1	9,600	9,600	33.5	9,900	9,900	42.0	10,000	10,000	0	10,100	10,100	80
85				27.8	8,600	8,600	38.0	8,800	8,800	59.	8,900	8,900	85
90	**			20.6	7,600	7,600	33.5	7,800	7,800	3	7,800	7,800	90
95				8.6	6,600	6,600	28.5	6,800	6,800	56.	6,900	6,900	95
100				**			22.4	5,900	5,900	6	6,100	6,100	100
105							13.9	5,200	5,100	53.	5,300	5,300	105
110							**			8	4,700	4,600	110
115										50.	4,000	4,000	115

"MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

BOOM LENGTH 90'			BOOM LENGTH 102'			BOOM LENGTH 114'			BOOM LENGTH 126'		
LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)
83.9	8,300*	8,300*	95.9	6,400*	6,400*	107.9	4,800	4,700	119.9	3,500	3,400



TRUCK CRANE
1775

LIFTING CAPACITIES CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.


ON OUTRIGGERS - FULLY EXTENDED AND WITH 11,000 LB COUNTERWEIGHT

LOAD RADIUS (FT)	BOOM LENGTH 40'			BOOM LENGTH 54'			BOOM LENGTH 66'			BOOM LENGTH 78'			LOAD RADIUS (FT)
	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	
10	69.4	150,000*	150,000*	74.9	102,600*	102,600*							10
12	66.2	125,700*	125,700*	72.7	102,600*	102,600*							12
15	61.2	109,000*	109,000*	69.3	100,600*	100,600*	73.2	80,700*	80,700*				15
20	52.3	82,100*	82,100*	63.4	83,200*	83,200*	68.5	72,000*	72,000*	72.0	62,300*	62,300*	20
25	41.9	63,500*	63,500*	57.1	64,600*	64,600*	63.7	64,900*	64,900*	68.1	55,800*	55,800*	25
30	28.4	49,100	49,100*	50.2	50,500	50,500*	58.7	50,900	50,900*	64.0	49,800*	49,800*	30
35	**			43.1	38,500	38,500	53.3	39,000	39,000	59.7	39,300	39,300	35
40				33.5	30,400	30,400	47.5	31,000	31,000	55.3	31,300	31,300	40
45				20.9	24,700	24,700	33.5	21,000	21,000	45.5	21,400	21,400	45
50				**			41.0	25,300	25,300	50.6	25,700	25,700	50
55							23.9	17,600	17,600	39.9	18,000	18,000	55
60							**			33.5	15,300	15,200	60
65										25.7	13,100	12,900	65
70										14.0	11,300	11,100	70
75										**			75

**MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

BOOM LENGTH 40'			BOOM LENGTH 54'			BOOM LENGTH 66'			BOOM LENGTH 78'		
LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)
33.9	28,600*	28,600*	47.9	19,100*	19,100*	59.9	14,200*	14,200*	71.9	10,600	10,400

USE THESE CHARTS ONLY
WHEN ALL OUTRIGGERS
ARE FULLY EXTENDED



ON OUTRIGGERS - FULLY EXTENDED AND WITH 11,000 LB COUNTERWEIGHT

LOAD RADIUS (FT)	BOOM LENGTH 90'			BOOM LENGTH 102'			BOOM LENGTH 114'			BOOM LENGTH 126'			LOAD RADIUS (FT)
	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	
10													10
12													12
15													15
20													20
25	74.5	56,300*	58,300*										25
30	71.2	48,100*	48,100*	73.5	42,000*	42,000*							30
35	67.7	41,800*	41,800*	70.5	36,500*	36,500*	72.6	31,600*	31,600*				35
40	64.2	36,700*	36,700*	67.4	32,200*	32,200*	70.0	29,600*	29,600*	71.1	24,800*	24,800*	40
45	60.5	31,500	31,500	64.3	28,700*	28,700*	67.2	26,300*	26,300*	69.9	22,200*	22,200*	45
50	56.7	25,800	25,800	61.1	25,800*	25,800*	64.4	23,600*	23,600*	69.9	22,200*	22,200*	50
55	52.8	21,600	21,600	57.8	21,700	21,700	61.5	21,500*	21,500*	5	20,100*	20,100*	55
60	48.5	18,300	18,200	54.4	18,400	18,300	58.6	18,500	18,400	67.1	18,300*	18,300*	60
65	44.0	15,600	15,500	50.8	15,800	15,600	55.6	15,900	15,700	0	15,900	15,800	65
70	39.1	13,400	13,200	47.0	13,600	13,400	52.5	13,700	13,500	64.1	13,800	13,500	70
75	33.5	11,600	11,400	42.9	11,800	11,500	49.1	11,900	11,600	5	12,000	11,700	75
80	26.9	10,000	9,800	38.5	10,200	10,000	45.7	10,300	10,100	62.1	10,400	10,200	80
85	18.1	8,700	8,400	33.5	8,900	8,600	42.0	9,000	8,800	0	9,100	8,900	85
90	**			27.8	7,700	7,500	38.0	7,900	7,600	59.1	8,000	7,700	90
95				20.6	6,700	6,500	33.5	6,800	6,600	3	7,000	6,700	95
100				8.6	5,800	5,600	28.5	6,000	5,700	56.1	6,100	5,900	100
105				**			22.4	5,200	5,000	6	5,300	5,100	105
110							13.9	4,400	4,200	53.1	4,600	4,400	110
115							**			8	3,900	3,700	115
										50.1	3,300	3,200	
										9			

**MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

BOOM LENGTH 90'			BOOM LENGTH 102'			BOOM LENGTH 114'			BOOM LENGTH 126'		
LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)
83.9	7,700	7,500	95.9	5,600	5,400	107.9	4,000	3,800	119.9	2,800	2,600



TRUCK CRANE
1775

LIFTING CAPACITIES CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.


ON OUTRIGGERS - FULLY EXTENDED AND WITH 7,000 LB COUNTERWEIGHT

LOAD RADIUS (FT)	BOOM LENGTH 40'			BOOM LENGTH 54'			BOOM LENGTH 66'			BOOM LENGTH 78'			LOAD RADIUS (FT)
	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	
10	69.4	150,000*	149,400*	74.9	102,600*	102,600*							10
12	66.2	125,700*	125,700*	72.7	102,600*	102,600*							12
15	61.2	109,000*	106,400*	69.3	100,600*	100,600*	73.2	80,700*	80,700*				15
20	52.3	79,700*	79,700*	63.4	80,700*	80,700*	68.5	72,000*	72,000*	72.0	62,300*	62,300*	20
25	41.9	61,600*	61,600*	57.1	62,600*	62,600*	63.7	63,200*	63,200*	68.1	55,800*	55,800*	25
30	28.4	44,700*	44,700*	50.2	46,100*	46,100*	58.7	46,500*	46,500*	64.0	46,800*	46,800*	30
35	**			43.1	35,000	35,000	53.3	35,500	35,500	59.7	35,700	35,700	35
40				33.5	27,500	27,500	47.5	28,100	28,100	55.3	28,400	28,400	40
45				20.9	22,100	22,100	41.0	22,800	22,800	50.6	23,100	23,100	45
50				**			33.5	18,800	18,800	45.5	19,200	19,200	50
55							23.9	15,600	15,600	39.9	16,000	16,000	55
60							**			33.5	13,500	13,300	60
65										25.7	11,500	11,200	65
70										14.0	9,800	9,400	70
75										**			75

**MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

BOOM LENGTH 40'			BOOM LENGTH 54'			BOOM LENGTH 66'			BOOM LENGTH 78'		
LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)
33.9	28,600*	28,600*	47.9	19,100*	19,100*	59.9	13,100	12,900	71.9	9,200	8,800

USE THESE CHARTS ONLY
WHEN ALL OUTRIGGERS
ARE FULLY EXTENDED



ON OUTRIGGERS - FULLY EXTENDED AND WITH 7,000 LB COUNTERWEIGHT

LOAD RADIUS (FT)	BOOM LENGTH 90'			BOOM LENGTH 102'			BOOM LENGTH 114'			BOOM LENGTH 126'			LOAD RADIUS (FT)
	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	
10													10
12													12
15													15
20	74.5	56,300*	56,300*										20
25	71.2	48,100*	48,100*	73.5	42,000*	42,000*							25
30	67.7	41,800*	41,800*	70.5	36,500*	36,500*	72.6	31,600*	31,600*				30
35	64.2	35,900	35,900*	67.4	32,200*	32,200*	70.0	29,600*	29,600*	71.1	24,800*	24,800*	35
40	60.5	28,600	28,600	64.3	28,700*	28,700*	67.2	26,300*	26,300*	69.1	22,200*	22,200*	40
45	56.7	23,300	23,300	61.1	23,400	23,400	64.4	23,500	23,500*	69.1	19,700	19,700	45
50	52.8	19,400	19,400	57.8	19,500	19,500	61.5	19,600	19,600	67.1	16,600	16,500	50
55	48.5	16,300	16,200	54.4	16,400	16,300	58.6	16,500	16,400	67.1	14,200	13,900	55
60	44.0	13,800	13,600	50.8	14,000	13,700	55.6	14,100	13,800	64.1	12,200	11,800	60
65	39.1	11,800	11,500	47.0	12,000	11,600	52.5	12,100	11,700	64.1	10,500	10,100	65
70	33.5	10,100	9,700	42.9	10,300	9,900	49.1	10,400	10,000	5	7,900	7,400	70
75	26.9	8,600	8,200	38.5	8,800	8,400	45.7	9,000	8,500	62.1	6,800	6,300	75
80	18.1	7,400	7,000	33.5	7,600	7,200	42.0	7,700	7,300	0	5,800	5,400	80
85	**			27.8	6,500	6,100	38.0	6,700	6,200	59.1	5,000	4,600	85
90				20.6	5,600	5,100	33.5	5,700	5,300	3	4,300	3,800	90
95				8.6	4,700	4,300	28.5	4,900	4,500	56.1	3,600	3,200	95
100				**			22.4	4,100	3,700	6	3,000	2,600	100
105							13.9	3,500	3,000	53.1	2,500	2,100	105
110										8			110
115										9			115

**MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

BOOM LENGTH 90'			BOOM LENGTH 102'			BOOM LENGTH 114'			BOOM LENGTH 126'		
LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)
83.9	7,700	7,500	95.9	5,600	5,400	107.9	4,000	3,800	119.9	2,800	2,600



TRUCK CRANE
1775

LIFTING CAPACITIES CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.


ON OUTRIGGERS - FULLY EXTENDED AND WITH 5,000 LB COUNTERWEIGHT

LOAD RADIUS (FT)	BOOM LENGTH 40'			BOOM LENGTH 54'			BOOM LENGTH 66'			BOOM LENGTH 78'			LOAD RADIUS (FT)
	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	
10	69.4	150,000*	148,300*	74.9	102,600*	102,600*							10
12	66.2	125,700*	125,700*	72.7	102,600*	102,600*							12
15	61.2	108,100*	105,400*	69.3	100,600*	100,600*	73.2	80,700*	80,700*				15
20	52.3	78,500*	78,500*	63.4	79,600*	79,600*	68.5	72,000*	72,000*	72.0	62,300*	62,300*	20
25	41.9	60,800*	60,800*	57.1	61,700*	61,700*	63.7	62,200*	62,200*	68.1	55,800*	55,800*	25
30	28.4	42,800	42,800	50.2	44,200	44,200	58.7	44,600	44,600	64.0	44,900	44,100	30
35	**			43.1	33,400	33,400	53.3	34,000	34,000	59.7	34,200	34,200	35
40				33.5	26,200	26,200	47.5	26,800	26,800	55.3	27,100	27,100	40
45				20.9	22,100	21,100	41.0	21,700	21,700	50.6	22,100	22,100	45
50				**			33.5	17,800	17,600	45.5	18,200	17,900	50
55							23.9	14,800	14,400	39.9	15,200	14,800	55
60							**			33.5	12,800	12,300	60
65										25.7	10,800	10,300	65
70										14.0	9,100	8,600	70
75										**			75

**MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

BOOM LENGTH 40'			BOOM LENGTH 54'			BOOM LENGTH 66'			BOOM LENGTH 78'		
LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)
33.9	28,600*	28,600*	47.9	19,100*	19,100*	59.9	13,100	12,900	71.9	9,200	8,800

USE THESE CHARTS ONLY
WHEN ALL OUTRIGGERS
ARE FULLY EXTENDED



ON OUTRIGGERS - FULLY EXTENDED AND WITH 5,000 LB COUNTERWEIGHT

LOAD RADIUS (FT)	BOOM LENGTH 90'			BOOM LENGTH 102'			BOOM LENGTH 114'			BOOM LENGTH 126'			LOAD RADIUS (FT)
	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	LOADED BOOM ANGLE (DEG)	OVER REAR (LB)	360° (LB)	
10													10
12													12
15													15
20	74.5	56,300*	56,300*										20
25	71.2	48,100*	48,100*	73.5	42,000	42,000*							25
30	67.7	41,800*	41,800*	70.5	36,000*	36,500*	72.6	31,600*	31,600*				30
35	64.2	34,400	34,200	67.4	32,200*	32,200*	70.0	29,600*	29,600*	71.1	24,800*	24,800*	35
40	60.5	27,300	27,300	64.3	28,700*	28,700*	67.2	26,300*	26,300*	69.1	22,200*	22,200*	40
45	56.7	22,200	22,200	61.1	23,400	23,400	64.4	22,500	22,500	69.1	22,200*	22,200*	45
50	52.8	18,400	18,100	57.8	19,500	19,500	61.5	18,600	18,400	64.1	18,700	18,400	50
55	48.5	15,500	15,000	54.4	16,400	16,300	58.6	15,700	15,200	67.1	15,800	15,300	55
60	44.0	13,100	12,500	50.8	14,000	13,700	55.6	13,300	12,800	69.1	13,400	12,900	60
65	39.1	11,100	10,600	47.0	12,000	11,600	52.5	11,400	10,800	64.1	11,500	10,900	65
70	33.5	9,400	8,900	42.9	10,300	9,900	49.1	9,800	9,100	59.1	9,900	9,200	70
75	26.9	8,000	7,500	38.5	8,800	8,400	45.7	8,400	7,800	62.1	8,500	7,900	75
80	18.1	6,800	6,200	33.5	7,600	7,200	42.0	7,200	6,600	69.1	7,300	7,900	80
85	**			27.8	6,500	6,100	38.0	6,200	5,600	59.1	6,300	5,700	85
90				20.6	5,600	5,100	33.5	5,300	4,700	56.1	5,400	4,800	90
95				8.6	4,700	4,300	28.5	4,400	3,900	53.1	4,600	4,000	95
100				**			22.4	3,700	3,200	50.1	3,900	3,300	100
105							13.9	3,100	2,500	47.1	3,200	2,700	105
110										44.1	2,600	2,100	110
115										41.1	2,100	1,600	115

**MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

BOOM LENGTH 90'			BOOM LENGTH 102'			BOOM LENGTH 114'			BOOM LENGTH 126'		
LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)	LOAD RADIUS (FT)	OVER REAR (LB)	360° (LB)
83.9	6,500	6,100	95.9	4,600	4,100	107.9	3,100	2,700	119.9	2,000	1,600



TEREX

TRUCK CRANE

1775

LIFTING CAPACITIES CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.

SIDE STOW JIB ON FULLY EXTENDED OUTRIGGERS WITH 15,000 COUNTERWEIGHT

LOADED BOOM ANGLE (DEG)	33' OFFSETTABLE JIB									57' OFFSETTABLE JIB									LOADED BOOM ANGLE (DEG)
	0° OFFSET			15° OFFSET			30° OFFSET			0° OFFSET			15° OFFSET			30° OFFSET			
	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	
77	40	12,600*	12,600*	51	8,600*	8,600*	56	6,500*	6,500*	49	6,600*	6,600*	65	4,600*	4,600*	76	3,400*	3,400*	77
75	47	12,100*	12,100*	56	8,200*	8,200*	61	6,300*	6,300*	56	6,500*	6,500*	71	4,400*	4,400*	81	3,300*	3,300*	75
73	53	11,600*	11,600*	62	7,900*	7,900*	67	6,200*	6,200*	63	6,300*	6,300*	77	4,200*	4,200*	87	3,200*	3,200*	73
71	59	11,000*	11,000*	67	7,600*	7,600*	72	6,000*	6,000*	70	6,100*	6,100*	83	4,000*	4,000*	92	3,100*	3,100*	71
68	68	10,000*	10,000*	75	7,200*	7,200*	79	6,000*	6,000*	80	5,500*	5,500*	92	3,800*	3,800*	100	3,000*	3,000*	68
65	76	9,300*	9,300*	82	6,800*	6,800*	86	5,700*	5,700*	89	5,000*	5,000*	100	3,600*	3,600*	107	2,900*	2,900*	65
62	83	9,000*	9,000*	89	6,500*	6,500*	93	5,500*	5,500*	98	4,600*	4,600*	108	3,400*	3,400*	114	2,800*	2,800*	62
59	90	8,000*	8,000*	96	6,300*	6,300*	99	5,400*	5,400*	106	4,300*	4,300*	115	3,200*	3,200*	121	2,700*	2,700*	59
55	99	6,900	6,900	104	6,000*	6,000*	107	5,300*	5,300*	116	3,900*	3,900*	124	3,000*	3,000*	129	2,600*	2,600*	55
51	106	6,000	5,800	111	5,500	5,400	114	5,200*	5,200*	126	3,600*	3,600*	132	2,900*	2,900*	136	2,600*	2,600*	51
47	113	5,100	4,800	118	4,800	4,600	121	4,700	4,600	134	3,400*	3,400*	140	2,800*	2,800*	143	2,500*	2,500*	47
43	120	4,300	4,000	125	4,100	3,900	126	4,000	3,800	142	3,200*	3,200*	147	2,700*	2,700*	149	2,500*	2,500*	43
38	127	3,500	3,200	132	3,400	3,200	132	3,400	3,100	150	2,800	2,600	154	2,600*	2,400	156	2,500*	2,400	38
32	135	2,800	2,500	139	2,700	2,500	138	2,700	2,500	159	2,200	2,000	162	2,200	1,900	162	2,200	1,900	32
25	143	2,200	1,900	145	2,100	1,800				167	1,700	1,500	169	1,700	1,500				25
17	150	1,700	1,400	150	1,600	1,400				173	1,400	1,100	174	1,300	1,100				17
0	152	1,400	1,200							177	1,100	900							0

Notes For Jib Capacities:

- A. For all boom lengths less than the maximum with a jib erected, the rated loads are determined by boom angle only. In the appropriate column.
B. For boom angle not shown, use the capacity of the next lower boom angle.
C. Listed radii are for extended main boom only.

ON TIRES WITH 15,000 LB COUNTERWEIGHT

RADIUS (FT)	MAX BOOM LENGTH (FT)	ALL		
		PICK & CARRY		
		STATIONARY	CREEP	2.5 MPH STRAIGHT OVER REAR
10	40	53,800*	38,800*	31,300*
12	40	49,400*	35,400*	28,500*
15	40	43,900*	31,200*	24,800*
20	40	33,100	25,600*	20,000*
25	54	23,500	21,200*	16,400*
30	54	17,800	17,800	13,400*
35	54	13,800	13,800	11,000*
40	66	11,200	11,200	9,400*
45	66	9,000	9,000	8,000*
50	66	7,300	7,300	6,800*
55	78	5,900	5,900	5,800*
60	78	4,700	4,700	4,700
65	78	3,800	3,800	3,800
70	90	3,100	3,100	3,100
75	90	2,500	2,500	2,500
80	90	1,900	1,900	1,900

Notes For On Tire Capacities:

- A. For Pick and Carry operations, boom must be centered over the front of the crane with swing brake and lock engaged. Use minimum boom point height and keep load close to ground surface. Travel must be on smooth level surface.
B. The load should be restrained from swinging. NO ON TIRE OPERATION WITH JIB ERECTED.
C. Without outriggers, never maneuver the boom beyond listed load radii for applicable tires to ensure stability.
D. Creep speed is crane movement of less than 200' (61 m) in a 30 minute period and not exceeding 1.0 mph (1.6 km/h).
E. Refer to General Notes for additional information.

MAXIMUM PERMISSIBLE HOIST LINE LOAD

LINE PARTS	1	2	3	4	5	6	7	8	9	10	11
MAIN & AUX. HOIST	13,800	27,600	41,400	55,200	69,000	82,800	96,600	110,400	124,200	138,000	150,000
WIRE ROPE		3/4" ROTATION RESISTANT COMPACTED STRAND, 34X7, GRADE 2160, MINIMUM BREAKING STRENGTH-34.5 TONS, WEIGHT 1.24 LB/FT 3/4" 6X19 OR 6X37 IPS IWRC, PREFORMED RIGHT REGULAR LAY MINIMUM BREAKING STRENGTH 25.6 TONS, WEIGHT 1.04 LB/FT									



TEREX

TRUCK CRANE

1775

LIFTING CAPACITIES CAUTION: Do not use this specification sheet as a load rating chart. The format of data is not consistent with

the machine chart and may be subject to change

SIDE STOW JIB ON FULLY EXTENDED OUTRIGGERS WITH 7,000 COUNTERWEIGHT

LOADED BOOM ANGLE (DEG)	33' OFFSETTABLE JIB									57' OFFSETTABLE JIB									LOADED BOOM ANGLE (DEG)
	0° OFFSET			15° OFFSET			30° OFFSET			0° OFFSET			15° OFFSET			30° OFFSET			
	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	LOAD RADIUS (REF) (FT)	REAR ONLY (LB)	360° (LB)	
77	39	12,600*	12,600*	49	8,600*	8,600*	57	6,500*	6,500*	49	6,600*	6,600*	66	4,600*	4,600*	75	3,400*	3,400*	7
75	46	12,100*	12,100*	55	8,200*	8,200*	62	6,300*	6,300*	57	6,500*	6,500*	72	4,400*	4,400*	81	3,300*	3,300*	7
73	53	11,600*	11,600*	60	7,900*	7,900*	67	6,200*	6,200*	64	6,500*	6,300*	78	4,200*	4,200*	86	3,200*	3,200*	7
71	59	11,000*	11,000*	66	7,600*	7,600*	72	6,000*	6,000*	71	6,100*	6,100*	84	4,000*	4,000*	92	3,100*	3,100*	5
68	67	10,000*	10,000*	73	7,200*	7,200*	79	6,000*	6,000*	81	5,500*	5,500*	92	3,800*	3,800*	99	3,000*	3,000*	7
65	75	9,300*	9,300*	81	6,800*	6,800*	86	5,700*	5,700*	90	5,000*	5,000*	100	3,600*	3,600*	107	2,900*	2,900*	3
62	82	8,300	8,100	87	6,500*	6,500*	93	5,500*	5,500*	98	4,600*	4,600*	108	3,400*	3,400*	114	2,800*	2,800*	7
59	88	7,000	6,900	94	6,200*	6,100	99	5,400*	5,400*	106	4,300*	4,300*	115	3,200*	3,200*	120	2,700*	2,700*	1
55	97	5,600	5,500	102	5,200	5,000	106	4,900	4,600	116	3,900*	3,900*	124	3,000*	3,000*	128	2,600*	2,600*	6
51	104	4,500	4,300	110	4,300	4,000	113	4,100	3,700	124	3,600*	3,300	132	2,900*	2,900*	136	2,600*	2,600*	8
47	111	3,600	3,400	117	3,500	3,200	120	3,400	3,000	132	2,900	2,500	140	2,700*	2,300	143	2,500*	2,300	6
43	117	2,900	2,700	123	2,800	2,500	126	2,800	2,300	139	2,300	1,900	146	2,200	1,800	149	2,100	1,800	5
38	125	2,200	1,900	130	2,100	1,700	132	2,100	1,700	147	1,700	1,300	154	1,600	1,300	155	1,600	1,300	6
32	135	1,600	1,300	137	1,500	1,100	138	1,500	1,200	156	1,200		168	1,100		162	1,100		2
25	141	1,000		143															5
					900														9

Notes For Jib Capacities:

- A. For all boom lengths less than the maximum with a jib erected, the rated loads are determined by boom angle only in the appropriate column.
B. For boom angle not shown, use the capacity of the next lower boom angle.
C. Listed radii are for extended main boom only.

ON TIRES WITH 7,000 LB COUNTERWEIGHT

RADIUS (FT)	MAX BOOM LENGTH (FT)	ALL		
		PICK & CARRY		
		STATIONARY	CREEP	2.5 MPH
10	40	55,300*	40,400*	32,900*
12	40	50,900*	36,900*	29,900*
15	40	44,800*	32,500*	26,200*
20	40	28,000*	26,700*	21,200*
25	54	19,500*	19,500*	17,400*
30	54	14,600*	14,600*	14,300*
35	54	11,100*	11,100*	11,100*
40	66	8,000*	8,000*	8,000*
45	66	6,000*	6,000*	6,000*
50	66	4,700*	4,700*	4,700*
55	78	3,900*	3,900*	3,900*
60	78	3,300*	3,300*	3,300*
65	78	2,700*	2,700*	2,700*
70	90	1,900*	1,900*	1,900*

Notes For Tire Capacities:

- A. For Pick and Carry operations, boom must be centered over the front of the crane with swing brake and lock engaged. Use minimum boom point height and keep load close to ground surface. Travel must be on smooth level surface.
B. The load should be restrained from swinging. NO ON TIRE OPERATION WITH JIB ERECTED.
C. Without outriggers, never maneuver the boom beyond listed load radii for applicable tires to ensure stability.
D. Creep speed is crane movement of less than 200' (61 m) in a 30 minute period and not exceeding 1.0 mph (1.6 km/h).
E. Refer to General Notes for additional information.

MAXIMUM PERMISSIBLE HOIST LINE LOAD

LINE PARTS	1	2	3	4	5	6	7	8	9	10	11
MAIN & AUX. HOIST	13,800	27,600	41,400	55,200	69,000	82,800	96,600	110,400	124,200	138,000	150,000
WIRE ROPE 3/4" ROTATION RESISTANT COMPACTED STRAND, 34X7, GRADE 2160, MINIMUM BREAKING STRENGTH-34.5 TONS. WEIGHT 1.24 LB/FT 3/4" 6X19 OR 6X37 IPS IWRC. PREFORMED RIGHT REGULAR LAY MINIMUM BREAKING STRENGTH 25.6 TONS. WEIGHT 1.04 LB/FT											



TEREX

General Notes | T775 Series

Cranes |

GENERAL

1. Rated loads as shown on Lift Charts pertain to this machine as originally manufactured and equipped. Modifications to the machine or use of optional equipment or other than that specified can result in a reduction of capacity.
2. Construction equipment can be hazardous if improperly operated or maintained. Operation and maintenance of this machine shall be in compliance with the information in the Operator's, Parts and Safety Manuals supplied with this machine. If These manuals are missing, order replacements from the manufacturer through your distributor.
3. These warnings do not constitute all of the operating conditions for the crane. The operator and job site supervision must read the OPERATORS MANUAL, CIMA SAFETY MANUAL, APPLICABLE OSHA REGULATIONS, AND SOCIETY OF MECHANICAL ENGINEERS (ASME) SAFETY STANDINGS FOR CRANES.
4. This crane and its load ratings are in accordance with POWER CRANE & SHOVEL ASSOCIATION, STANDARD NO. 4 SAE CRANE LOAD STABILITY TEST CODE J765A, SAE METHOD OF TEST FOR CRANE STRUCTURE J1063 AND APPLICABLE SAFETY CODE FOR CRANES, DERRICKS AND HOISTS, ASME/ANSI B30.5.

DEFINITIONS

1. **LOAD RADIUS** - The horizontal distance from the axis of rotation before loading to the center of the vertical hoist line or tackle with a load applied.
2. **LOADED BOOM ANGLE** - It is the angle between the boom base section and the horizontal, after lifting the rated load at the rated radius. The boom angle before loading should be greater to account for deflections. The loaded boom angle combined with boom length give only an approximation of the operating radius.
3. **WORKING AREA** - Areas measured in a circular arc about the centerline of rotation as shown in the diagram.
4. **FREELY SUSPENDED LOAD** - Load hanging free with no direct external force applied except by the hoist rope.
5. **SIDE LOAD** - Horizontal force applied to the lifted load either on the ground or in the air.
6. **NO LOAD STABILITY LIMIT** - The stability limit radius shown on the range diagrams is the radius beyond which it is not permitted to position the boom, when the boom angle is less than the minimum shown on the applicable load chart, because the machine can overturn without any load.
7. **BOOM SIDE OF CRANE** - The side of the crane over which the boom is positioned when in OVERSIDE working position.

SET-UP

1. Crane load ratings are based on the crane being leveled and standing on a firm, uniform supporting surface.
2. Crane load ratings on outriggers are based on all outrigger beams being fully extended or in the case of partial extension ratings mechanically pinned in the appropriate position, and the tires free of the supporting surface.
3. Crane load ratings on tires depend on appropriate inflation pressure and the tire conditions. Caution must be exercised when increasing air pressures in tires. Consult Operator's Manual for precautions.
4. Use of jibs, lattice-type boom extensions, or fourth section pullouts extended is not permitted for pick and carry operations.
5. Consult appropriate section of the Operator's and Service Manual for more exact description of hoist line reeving.
6. The use of more parts of line than required by the load may result in having insufficient rope to allow the hook block to reach the ground.
7. Properly maintained wire rope is essential for safe crane operation. Consult Operator's Manual for proper maintenance and inspection requirements.
8. When spin-resistant wire rope is used, the allowable rope loading shall be the breaking strength divided by five (5), unless otherwise specified by the wire rope manufacturer.
9. Do not elevate the boom above 60° unless the boom is positioned in-line with the crane's chassis or the outrigger are extended. Failure to observe this warning may result in loss of stability.

OPERATION

1. **CRANE LOAD RATINGS MUST NOT BE EXCEEDED. DO NOT ATTEMPT TO TIP THE CRANE TO DETERMINE ALLOWABLE LOADS.**
2. When either radius or boom length, or both, are between listed values, the smaller of the two listed load ratings shall be used.
3. Do not operate at longer radii than those listed on the applicable load rating chart (cross hatched areas shown on range diagrams.)
4. The boom angles shown on the Capacity Chart give an approximation of the operating radius for a specified boom length. The boom angle, before loading, should be greater to account for boom deflection. It may be necessary to retract the boom if maximum boom angle is insufficient to maintain rated radius.
5. Power telescoping boom sections must be extended equally.
6. Rated loads include the weight of hook block, slings, and auxiliary lifting devices. Their weights shall be subtracted from the listed rated load to obtain the net load that can be lifted. When lifting over the jib the weight of any hook block, slings, and auxiliary lifting devices at the boom head must be added to the load. When jibs are erected but unused add two (2) times the weight of any hook block, slings, and auxiliary lifting devices at the jib head to the load.
7. Rated loads do not exceed 85% on outriggers or 75% on tires, of the tipping load as determined by SAE Crane Stability Test Code J765a. Structural strength ratings in chart are indicated with an asterisk (*).
8. Rated loads are based on freely suspended loads. No attempt shall be made to drag a load horizontally on the ground in any direction.
9. The user shall operate at reduced ratings to allow for adverse job conditions, such as: soft or uneven ground, out of level conditions, high winds, side loads, pendulum action, jerking or sudden stopping of loads, hazardous conditions, experience of personnel, two machine lifts, traveling with loads, electric wires, etc. (side pull on boom or jib is hazardous). Derating of the cranes lifting capacity is required when wind speed exceeds 20 MPH. The center of the lifted load must never be allowed to move more than 3" off the center line of the base boom section due to the effects of wind, inertia, or any combination of the two.
10. "Use 2' off the center line of the base boom for a two section boom, 3' for a three section boom, or 4' for a four section boom."
11. The maximum load which can be telescoped is not definable, because of variations in loadings and crane maintenance, but it is permissible to attempt retraction and extension if load ratings are not exceeded.
12. Load ratings are dependent upon the crane being maintained according to manufacturer's specifications.
13. It is recommended that load handling devices, including hooks, and hook blocks, be kept away from boom head at all times.
14. **FOR TRUCK CRANES ONLY:** 360° capacities apply only to machines equipped with a front outrigger jack and all five (5) outrigger jacks properly set. If the front (5th) outrigger jack is not properly set, the work area is restricted to the over side and over rear areas as shown on the Crane Working Positions diagram. Use the 360° load ratings in the overside work areas.
15. Do not lift with outrigger beams positioned between the fully extended and intermediate (pinned) positions.
16. Truck Cranes not equipped with equalizing (bogies) beams between the rear axles may not be used for lifting "on tires". Truck Cranes equipped with equalizing beams and rear air suspension should "dump" the air before lifting "on tires".

CLAMSHELL, MAGNET, AND CONCRETE BUCKET SERVICE

1. Maximum boom length for clamshell and magnet service is 50'.
2. Weight of clamshell or magnet, plus contents are not to exceed 6,000 lb or 90% of rated lifting capacities, whichever is less. For concrete bucket operation, weight of bucket and load must not exceed 90% of rated lifting capacity.

TEREX Cranes
106-12th Street S.E.
Waverly, Iowa 50677-9466 USA

TEL (319) 352-3920 FAX (319) 352-5727
EMAIL inquire@terexwaverly.com
WEB terex.com

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS OUR STANDARD WRITTEN WARRANTY APPLICABLE TO THE PARTICULAR PRODUCT. WE MAKE NO OTHER WARRANTY, EXPRESSED OR IMPLIED.

©TEREX CRANES, INC 2005

PRINTED IN U.S.A.

FEBRUARY 25, 2005