


» PRODUCT BROCHURE

Goldhofer

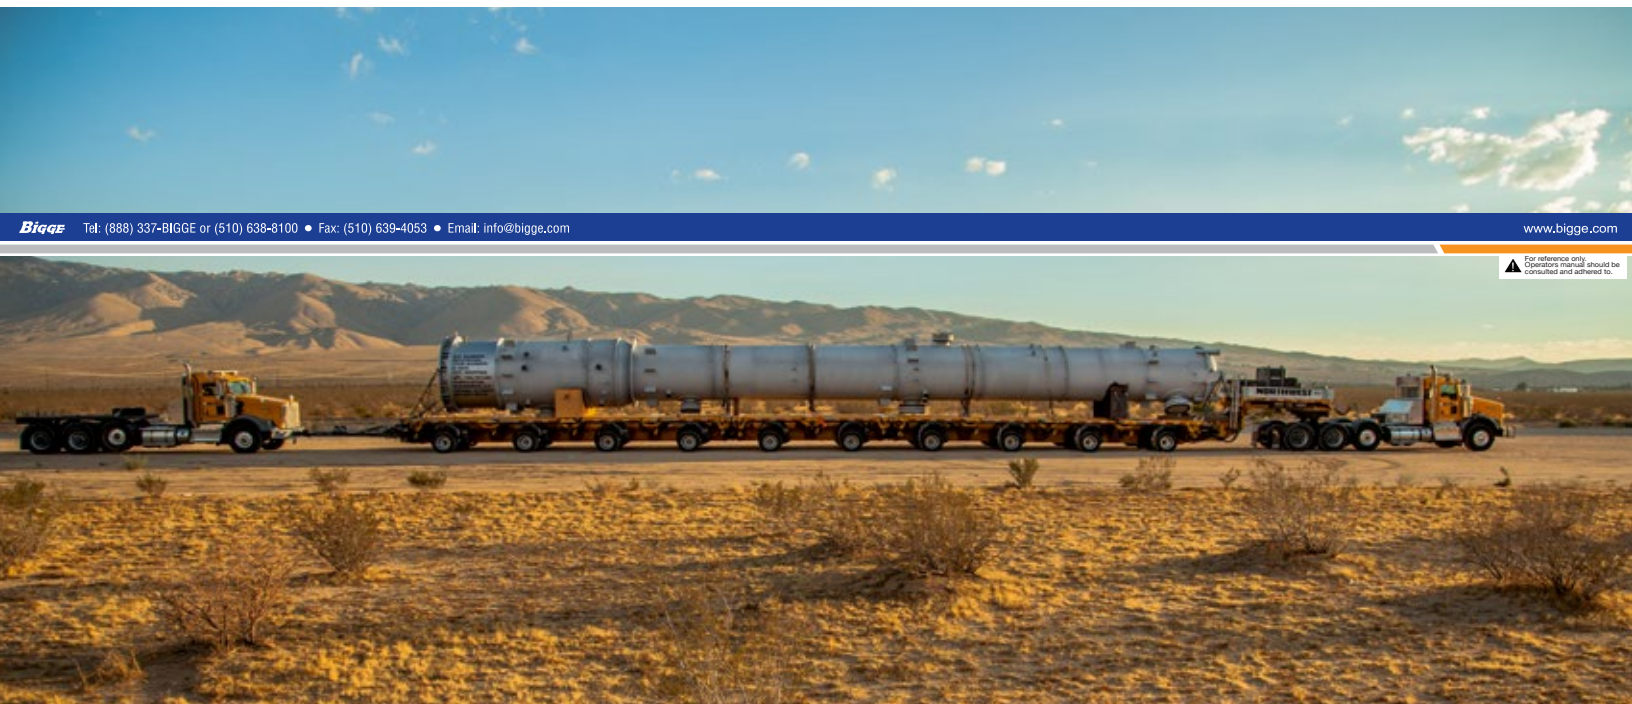

Bigge Tel: (888) 337-BIGGE or (510) 638-8100 • Fax: (510) 639-4053 • Email: info@bigge.com

www.bigge.com

For reference only.
Operator's manual should be
consulted and adhered to.

NORTH AMERICA

HEAVY-DUTY MODULES (TOWED)
HEAVY-DUTY MODULES (SELF-PROPELLED)



MADE FOR YOUR MISSION

CONTENT

OVERVIEW



HEAVY-DUTY MODULES (TOWED AND SELF-PROPELLED)

SERVICE AND SUPPORT	04
TECHNOLOGY	06

DUAL LANE MODULES

THP/CA	10
THP/DR	12
THP/DC	14
ACCESSORIES AND OPTIONS TECHNICAL DATA	16

HEAVY-DUTY MODULES (TOWED)

For reference only. Operators manual should be consulted and adhered to.

THP/HL-L THP/HL	20
ACCESSORIES AND OPTIONS TECHNICAL DATA	22
THP/SL-S	26
THP/SL-L	28
THP/SL	30
ACCESSORIES AND OPTIONS TECHNICAL DATA	32

HEAVY-DUTY MODULES (SELF-PROPELLED)

»ADDRIVE« »ADDRIVE« 2.0	36
PST/SL	38
ACCESSORIES AND OPTIONS TECHNICAL DATA	40
OVERVIEW OF STEERING PROGRAMS	44
PST/SL-E	46
PST/ES-E	48
ACCESSORIES AND OPTIONS TECHNICAL DATA	50

SPECIAL APPLICATIONS

FTV 550	54
RA 2 RA 3 RA 4	56
»FAKTOR« 5 »FAKTOR« 5.5	58

SERVICE AND SUPPORT LEAVE IT TO US!

Efficient transport essentially depends on two factors: the vehicle and the personnel. You must always be able to rely on both of them. With a unique combination based on service and training offers, Goldhofer contributes to ensuring that both vehicle and personnel will never let you down.



FliteLine

A Goldhofer Company

24H AVAILABLE EMERGENCY HOTLINE

We minimize your operational downtime by ensuring our service staff are ready to assist with a wide range of issues. In the event of an emergency, call our 24-hour hotline. The staff at Flite Line consider themselves members of each customer's technical support team and are prepared to assist around the clock to guarantee operations stay on track.



FOR 24/7 SUPPORT PLEASE CALL:
Telephone: +1 954-433-5617

USUAL BUSINESS HOURS:
Weekdays: 8:00 am – 6:00 pm (EST)



For reference only.
Operators manual should be
consulted and adhered to.

TRANSPORT ENGINEERING

- + Software programs for transport project management
- + Route surveys
- + Transport support through service engineering

SPARE PARTS

- + Fast availability
- + Local spare parts stock
- + Online electronic spare parts catalogue

REPAIRS

- + Maintenance and repair works
- + General vehicle overhauls
- + Workshop vehicles
- + In-house repair shop


FROM MIRAMAR/FLORIDA

Our professional team in Miramar/Florida can support a wide range of issues such as building and converting vehicles, guiding complex transport cargos, delivering spare parts or carry out on-site repairs.

Our service technicians are all trained by the manufacturer and certified and are readily available to carry out diverse and multifaceted assignments directly on location. We offer after sales support throughout the life of each product we sell and support you actively in terms of maintenance.

Our approach ensures essential procedures are run early, damage is avoided, and equipment availability is significantly increased.

- + 24-hour service
- + Local service partner
- + Local spare parts supply
- + Technical support
- + Transport advice and trainings by Goldhofer

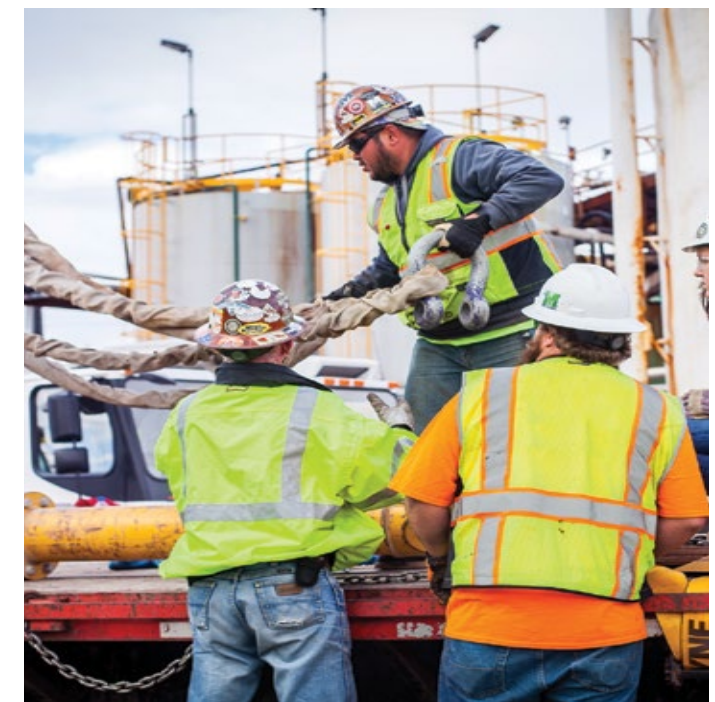


TECHNOLOGY

WHAT’S INSIDE A GOLDHOFER?

With decades of experience, Goldhofer is your partner in action, when it comes to well engineered, optimized, approved and tested technology. As one of the first manufacturers, offering heavy duty modules with hydrostatic drive, we are proud to offer the most advanced and reliable systems in the market. The torsion resistant frame combines stability for maximum payloads with sophisticated and practical details for your everyday use.

Equipped with hydromechanical steering, the Goldhofer-THP is practically fail safe. While the electronic multiway steering of the PST allows any kind of steering mode, you might require – no matter how narrow and challenging the conditions are.


FRAME, STEERING AND DRIVE

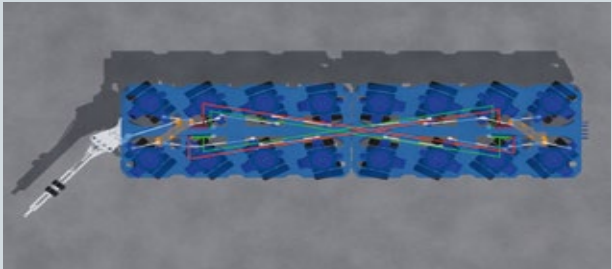


+ Hydromechanical steering



+ Electronic multiway steering

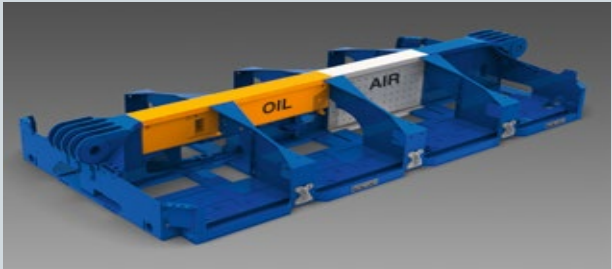

+ Center beam in box-section design with integrated compressed air and hydraulic oil tanks

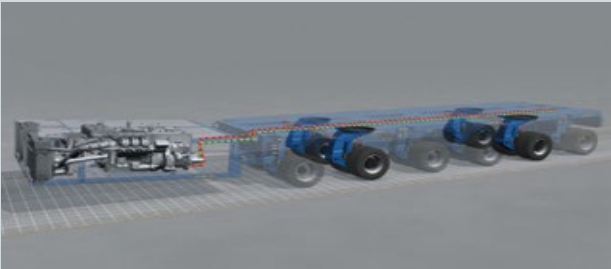


+ Hydrostatic drive

AXLE SUSPENSION

Safety is the most important thing when it comes to heavy transportation. To protect your valuable cargos from irregularities, shock or imbalances when the route is challenging, all Goldhofer heavy duty modules are equipped with hydraulic axle suspension, that allows every single axle to compensate rough ground conditions.

- + Hydraulic axle suspension – longitudinal, lateral movement and lateral swing movement

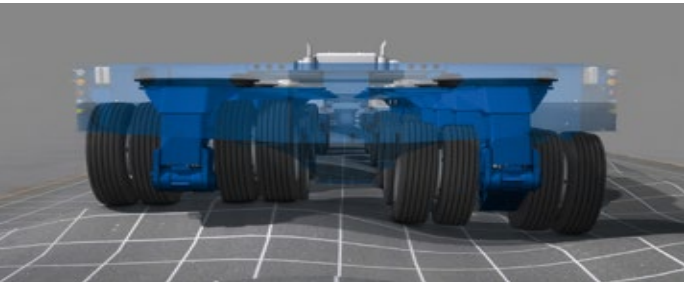

⚠

For reference only. Operators manual should be consulted and adhered to.

FRAME, STEERING AND DRIVE



+ Goldhofer pendular axle with ball bearing race ring



+ Goldhofer driven pendular axle with ball bearing race ring



+ Goldhofer pendular axle with ball bearing race ring for Dual lane modules



+ Goldhofer driven pendular axle with ball bearing race ring, hydraulic worm gear drive and electronic steering

TAILORED TO MEET

NORTH AMERICAN

REQUIREMENTS

Heavy haulage in North America is characterized above all by extreme challenges. The heavier the loads, the more important it is that you can rely on your vehicles – and not only that: Against a backdrop of varying legal regulations, you need to be able to adapt your vehicle flexibly and easily to the respective conditions. We meet these requirements with our Dual Lane heavy-duty modular systems. Trust the ORIGINAL.



EFFICIENT PERFORMANCE

10

The THP/CA, ranging from two to six axle lines and the dual lane technology, can be configured thanks to well engineered design under full load. The CA module ensures expansion of the width of the entire modular trailer, without needing a crane or forklift while complying with the various legal requirements of the individual states and provinces.



THP/DR

THE SOLUTION FOR EXTREME CHALLENGES

12

The THP/DR with double-rotating wheelsets makes it possible to adjust trailer width under full load so as to comply with the different regulations for heavy haulage on public roads in North America. This flexibility in terms of vehicle width and axle spacing means the return journey can be made without police escort. That reduces mobilization costs and improves the economics of the operation.



THP/DC

MAXIMUM FLEXIBILITY ON THE ROAD

14

For haulage operations across several borders, trailer width needs to be quickly adapted to the various regulations without having to spend lots of time re-configuring the Dual Lane trailer at critical points on the journey. The THP/DC is ideally suited for this mission, thanks to the hydraulic widening system. This feature allows you to change the trailer width while rolling. The complete widening process will be done quickly via wireless remote control. This keeps your personnel in the safe zone and not between the truck and trailer.





HEAVY-DUTY MODEL

For reference only.
Operators manual should be
consulted and adhered to.

YOUR BENEFITS

- ✓ Operation with basic width from 16.0-20.0 ft
- ✓ Change of width under load without crane or forklift
- ✓ Vehicle frame in longitudinally split design
- ✓ Usage of existing standard accessories such as gooseneck, drop deck etc.
- » Cost savings for long-distance hauling to job sites

TECHNICAL FEATURES

+ Twin tires	245/70 R 17.5
+ Axle load	52,900 lbs at 25 mph [24t at 40 km/h]
+ Loading deck width	14' [4,260 mm]
+ Vehicle width 6' wide axles	16'-20' [4,800-6,100 mm]
+ Vehicle width 7' wide axles	18'-20' [5,500-6,100 mm]
+ Axle spacing	9' 1" [2,770 mm]
+ Maximum steering angle	± 60°

THP/CA EFFICIENT PERFORMANCE





WIDENING
UNDER LOAD



HIGH TRANSPORT
FLEXIBILITY



OPERATING WIDTH
16'-20' [1,800-6,000 mm]

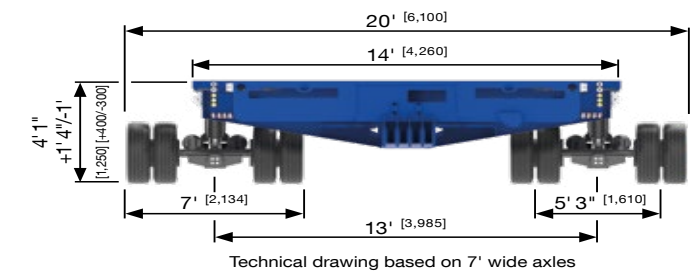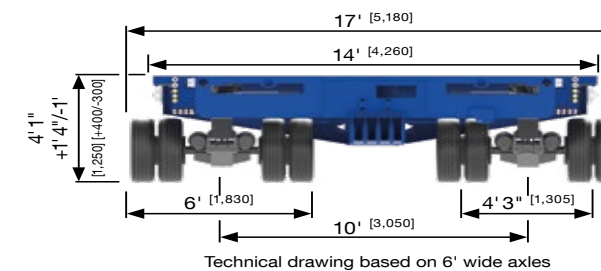



- YOUR
BENEFITS

✓

Change of width under load without crane or forklift

✓

Usage of common accessories such as gooseneck, drop deck etc.

»

Cost savings for long-distance hauling to job sites

TECHNICAL FEATURES	+ Twin tires	245/75 R 17.5
	+ Axle load	52,900 lbs at 25 mph [24 t at 40 km/h]
	+ Loading deck width	14' [4,270 mm]
	+ Vehicle width	14'-20' [4,270-6,100 mm]
	+ Axle spacing	5' 3" [1,600 mm]
	<i>(spacing between tandem groups)</i>	14' 1" [4,300 mm]
	+ Maximum steering angle	± 60°

THP/DR

THE SOLUTION FOR
EXTREME CHALLENGES




WIDENING
UNDER LOAD




DOUBLE-ROTATING
WHEELSETS





OPERATING WIDTH
14'-20' [4,200-6,000 mm]

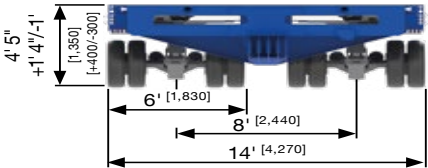

TRANSPORT TECHNOLOGY

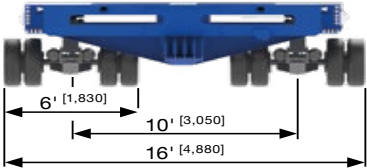

THP/DR

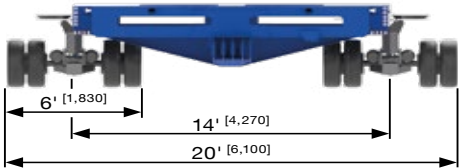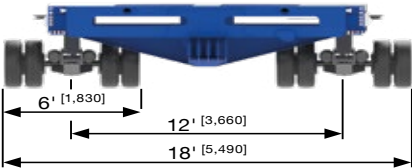

13

THP/CA | THP/DR | THP/DC

ACCESSORIES AND OPTIONS

+

TOWING EQUIPMENT
AND GOOSENECKS

GENERAL
ACCESSORIES

LOADING EQUIPMENT

TURNTABLE

TOWER ADAPTER

HIGH GIRDER BRIDGE

+ Swivel arm THP/DC

+ Swivel arm THP/DR

+ Drawbar 6' 7" [2,000 m], 9' 10" [3,000 m], 16' 5" [5,000 m], 23' [7,000 m] and 29' 6" [9,000 m]

+ Universal gooseneck 57,300 lbs [26 t], 77,100 lbs [35 t], 99,200 lbs [45 t] and 114,600 lbs [52 t]

+ Gooseneck THP/DC | THP/DR

+ Gooseneck THP/CA

+ THP/DC Diesel hydraulic power pack

+ "easyCONTROL" remote steering

+ Working lights

+ ALCOA aluminum rims with Durabright finish

+ Threaded bushings

+ Drop decks

+ Vessel bridges

+ Excavator decks

+ Intermediate spacers

+ Spacer

+ 220,000 lbs/440,000 lbs [100 t/200 t]

+ RA 2

+ RA 3

+ RA 4

+ »FAKTOR« 5.5

+ »FAKTOR« 5

THP/CA | THP/DR | THP/DC


TECHNICAL DATA

TECHNICAL
DATA

	THP/CA	THP/DR	THP/DC
Tires	Twin tires 245/70 R 17.5	Twin tires 245/70 R 17.5	Twin tires 245/70 R 17.5
Axle load	52,900 lbs at 25 mph [24 t at 40 km/h]	52,900 lbs at 25 mph [24 t at 40 km/h]	52,900 lbs at 25 mph [24 t at 40 km/h]
Driving height	4' 1" (+1' 4" / -1") [1,250 mm (+400/-300)]	4' 5" (+1' 4" / -1") [1,350 mm (+400/-300)]	4' 3" (+1' 4" / -1") [1,300 mm (+400/-300)]
Loading deck width	14' [4,260 mm]	14'-20' [4,270-6,100 mm]	14'-20' [4,260-6,100 mm]
Vehicle width	16'-20' (6' wide axles) [4,800-6,100 mm] 18'-20' (7' wide axles) [5,500-6,100 mm]	14' [4,270 mm]	14' [4,260 mm]
Axle spacing	9' 1" [2,770 mm]	5' 3" [1,600 mm] (spacing between tandem groups) 14' 1" [4,300 mm]	9' 1" [2,770 mm]
Maximum steering angle	± 60°	± 60°	± 60°
Number of axles	2-6 axles	2,4 axles	2-4 axles



ACCESSORIES FOR
HEAVY-DUTY MODULES
TOWED AND SELF-PROPELLED

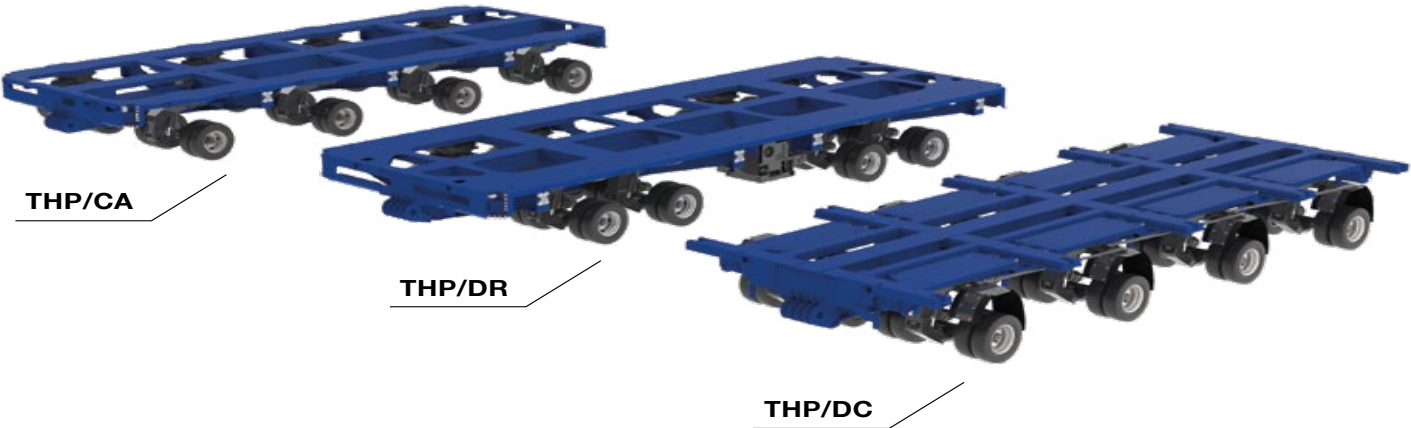



THP/HL-L | THP/HL YOUR OFF-ROAD EXPERT!

Goldhofer's THP/HL-L and THP/HL modules are extremely robust and use proven ball-bearing-race-rings. Use them for your most challenging operations, on-road and off-road with heaviest loads and under roughest conditions.



THP/HL-L | THP/HL

NOTHING IS TOO HEAVY

20

The high axle loads and the extreme bending moment offer a wide specter of use, when it comes to heaviest cargos in uneven terrain. THP/HL-L and THP/HL are your first choice when transporting mining equipment to its destination. With different variants of axle spacings you can be sure, to fulfill all legal requirements. The mo-dules can not only be pulled by truck, but also combined with Goldhofer's self-propelled heavy duty modules to ensure maximum flexibility and maneuverability under the most challenging conditions.





HEAVY-DUTY MO

For reference only. Operators manual should be consulted and adhered to.

- YOUR BENEFITS**
- ✓ Different axle spacing
 - » For legal axle loads on public roads
 - ✓ High bending moment
 - » Enables transport of heavy and compact cargos requiring low axle loads
 - ✓ Also for combination with PST/SL and PST/SL-E
 - » High flexibility for transportation of ultra heavy loads

TECHNICAL FEATURES

+ Twin tires	245/70 R 17.5
+ Vehicle width	10' 6" [3,200 mm]
+ Maximum steering angle	± 55°
+ THP/HL-L	57,500 lbs at 18.6 mph [26 t at 30 km/h]
+ Axle load	
+ Dead weight (4-axes)	25,500 lbs [11.6 t]
+ THP/HL	99,200 lbs at 0.6 mph [45 t at 1 km/h]
+ Axle load	
+ Dead weight (4-axes)	31,700 lbs [14.4 t]

THP/HL-L | THP/HL NOTHING IS TOO HEAVY



UNIVERSALLY COMBINABLE

EASY CHANGING OF WHEEL SETS



HIGH BENDING MOMENT



THP/HL-L

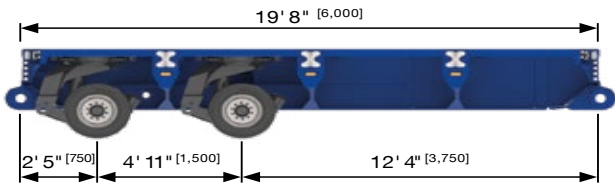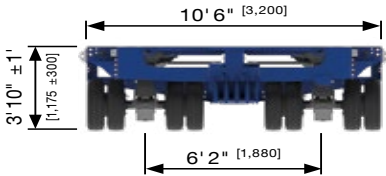

THP/HL

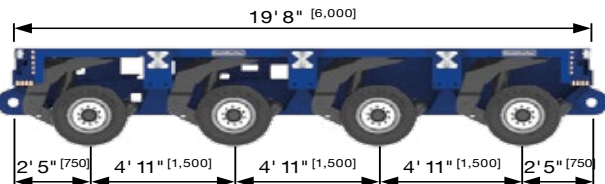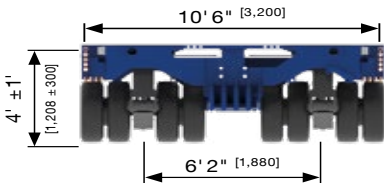

THP/HL-L | THP/HL

ACCESSORIES AND OPTIONS

+

TOWING EQUIPMENT AND GOOSENECKS	+ Steering swivel arm for single widths + Center pulling device for parallel combination (1+1/2) + Center pulling device for parallel combination (1+1) + Drawbar 6' 7" [2,000 m], 9' 10" [3,000 m], 16' 5" [5,000 m], 23' [7,000 m] and 29' 6" [9,000 m] + Universal gooseneck 57,300 lbs [26 t], 77,100 lbs [35 t], 99,200 lbs [45 t] and 114,600 lbs [52 t]
GENERAL ACCESSORIES	+ Kohler diesel hydraulic power pack + Kohler gasoline hydraulic power pack + Operation panel + Cable/radio remote controls and »SmartControl«
LOADING EQUIPMENT	+ Drop decks + Vessel bridges + Excavator decks + Intermediate spacers + Spacer
TURNTABLE	+ 220,000 lbs/440,000 lbs [100 t/200 t] + 660,000 lbs/880,000 lbs/1,323,000 lbs [300 t/400 t/600 t] [1]
BLADE TRANSPORT DEVICE	+ FTV 550
TOWER ADAPTER	+ RA 2 + RA 3 + RA 4
HIGH GIRDER BRIDGE	+ »FAKTOR« 5.5 + »FAKTOR« 5

[1] 1,323,000 lbs [600 t] turntables for double width combination only



ACCESSORIES FOR
HEAVY-DUTY MODULES
TOWED AND SELF-PROPELLED




THP/HL-L | THP/HL

TECHNICAL DATA

⚙

TECHNICAL DATA

	THP/HL-L	THP/HL
Tires	245/70 R 17.5	245/70 R 17.5
Axle load	57,500 lbs at 18.6 mph [26 t at 30 km/h]	99,200 lbs at 0.6 mph [45 t at 1 km/h]
Dead weight (4-axles)	25,500 lbs [11.6 t]	31,700 lbs [14.4 t]
Vehicle width	10' 6" [3,200 mm]	10' 6" [3,200 mm]
Axle spacing	4' 11" [1,500 mm]	4' 11" [1,500 mm]
Maximum steering angle	± 55°	± 55°
Number of axles	2-8	2-8

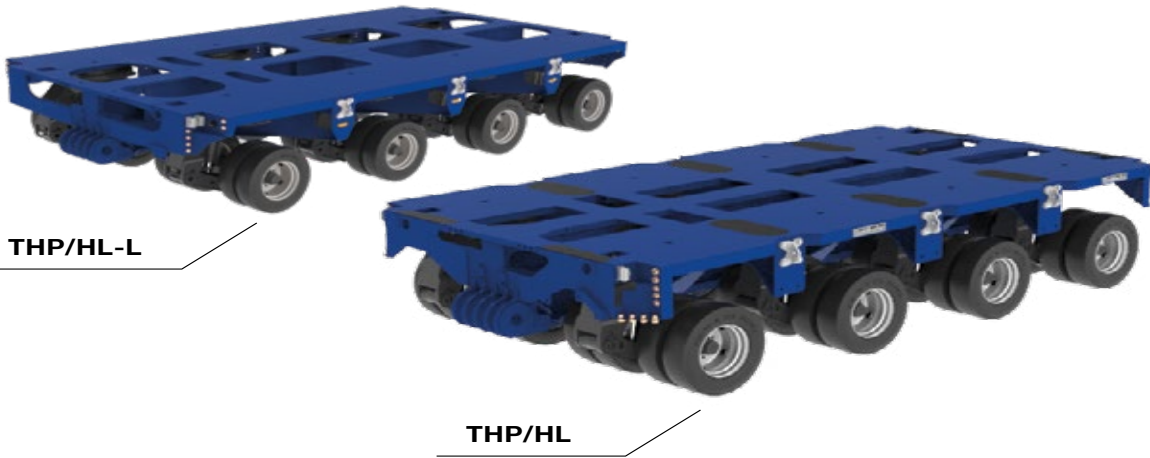

THP/HL-L

THP/HL

For reference only. Operators manual should be consulted and adhered to.



THP/SL-FAMILY HEAVY-DUTY HAULAGE HAS A NAME

Our THP/SL family is the ideal solution for transport companies of all sizes. With their limitless combination capability, extensive modular accessory system and expandability, SL-modules impress with unbeatable flexibility even for the heaviest loads.



A LIGHTWEIGHT FOR THE HEAVIEST LOADS

26

The low dead weight and the lowloader variants of our THP/SL-S lightweight types enable motorway travel and crossing bridges which are normally only possible with detours with heavier systems. This means that higher payloads can be transported at the same time.



For reference only.
Operators manual should be
consulted and adhered to.

THP/SL-L

LIGHT WORK FOR TRANSPORTATION

28

THP/SL-L modules unfold their full strength in road transport for particularly heavy loads. Loading goods and cargo are getting heavier, larger, and all above, higher. This requires a low dead weight and a low construction height of, for example, loading decks with a simultaneously high bending moment.



THP/SL

THE ORIGINAL

30

THP/SL – the synonyme for heavy-duty transport. Our original does not need any description because our customers around the world already trust in THP/SL modules. They are always used when heavy-duty loads have to be moved when high bending moment is required. The THP/SL provides a solution for any transport requirements due to a wide range of possible variations, such as split modules and a huge range of accessories.





YOUR
BENEFITS

- ✓

Extremely low dead weight
- »

Very high payloads
- ✓

Various tire sizes
- »

Ideal adjustment for loading height or more robust site utilization
- ✓

Widest-possible track in the SL-family
- »

Higher lateral stability

TECHNICAL
FEATURES

+ Single tires ^[1]	245/70 R 17,5
+ Axle load ^[1]	34,400 lbs at 12 mph [15.6 t at 20 km/h]
+ Dead weight (4-axes) ^[1]	21,000 lbs [9.6 t]
+ Single tires ^[2]	285/70 R 19,5
+ Axle load ^[2]	50,700 lbs at 6 mph [23 t at 10 km/h]
+ Dead weight (4-axes) ^[2]	22,500 lbs [10.2 t]
+ Maximum steering angle	± 55°
+ Vehicle width	9' 10" [3,000 mm]




THP/SL-S

A LIGHTWEIGHT FOR THE
HEAVIEST LOADS

LOW
DEAD WEIGHT

PENDULAR AXLE
WITH BALL BEARING
RACE RING

UNIVERSALLY
COMBINABLE

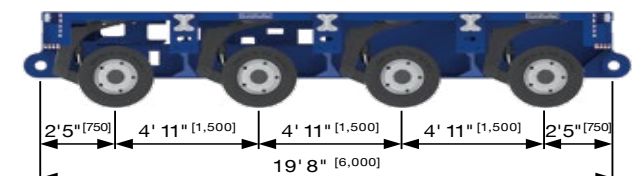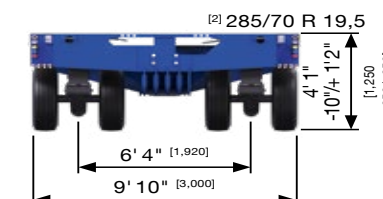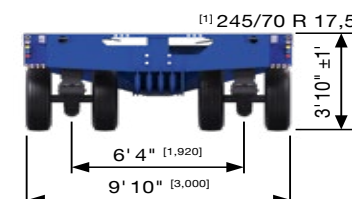



HEAVY-DUTY MOD

For reference only. Operators manual should be consulted and adhered to.

**YOUR
BENEFITS**

- ✓ Ideal combination between dead weight and bending moment
- » Optimized for on road operation with limited axle loads
- ✓ Combinable with other heavy-duty modules from the SL-family
- » Extension and higher flexibility for the vehicle fleet
- ✓ Maximum possible closed loading area
- » Higher torsional stiffness and working safety

**TECHNICAL
FEATURES**

- + Twin tires
 - + Axle load
 - + Dead weight (4-axes)
 - + Vehicle width
 - + Maximum steering angle
 - + Optional: Split version
- 215/75 R 17,5
57,500 lbs at 12 mph
[26.1 t at 20 km/h]
24,400 lbs
[11.1 t]
9' 10"
[3,000 mm]
± 55°

THP/SL-L LIGHT WORK FOR TRANSPORTATION




HIGH TRANSPORT
FLEXIBILITY



PENDULAR AXLE
WITH BALL BEARING
RACE RING



UNIVERSALLY
COMBINABLE

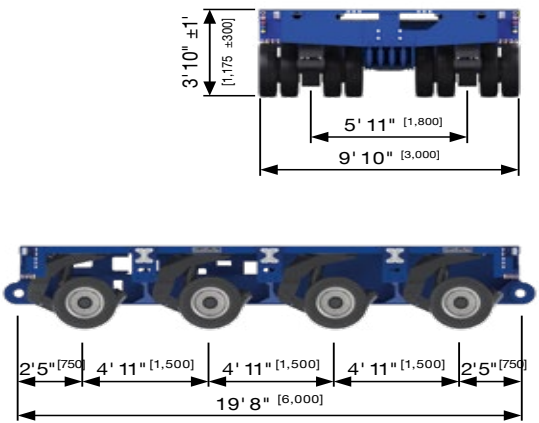

THP/SL-L 7 (3+4) WITH VESSEL BRIDGE
Combination example: All vehicles of the SL-family can be combined with a comprehensive modular accessory system

WORLDWIDE USE UNDER THE TOUGHEST CONDITIONS
This application in South Africa impressively demonstrates the efficiency of a THP/SL-L combination.





HEAVY-DUTY MODULE

For reference only.
Operators manual should be
consulted and adhered to.



YOUR BENEFITS

- ✓ Strong frame and coupling concepts
- » For the most extreme heavy-duty transport on the road and off road
- ✓ Efficient ad-on for self-propelled heavy-duty modules
- » Economical solution for increasing the payload and maximum utilisation



TECHNICAL FEATURES

- + Twin tires
 - + Axle load
 - + Dead weight (4-axes)
 - + Vehicle width
 - + Maximum steering angle
 - + Optional: Split version
- | |
|-----------------------|
| 215/75 R 17,5 |
| 99,000 lbs at 0.6 mph |
| [45t at 1 km/h] |
| 30,500 lbs |
| [13.85 t] |
| 9' 10" |
| [3,000 mm] |
| ± 55° |

THP/SL THE ORIGINAL



AXLE LOAD
UP TO 99,000 lbs [45t]



PENDULAR AXLE WITH
BALL BEARING
RACE RING





UNIVERSALLY
COMBINABLE



BEST PERFORMANCE CAPABILITY FOR ANY LOAD

Due to the extensive range of accessories, the THP/SL heavy-duty modules can be flexibly adapted to the specifications of the load, as shown here with a parallel combination (1+1/2).

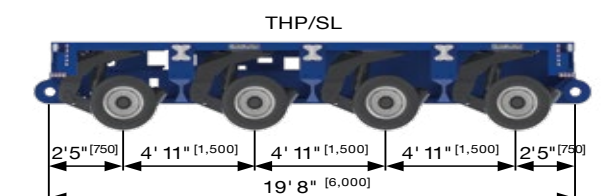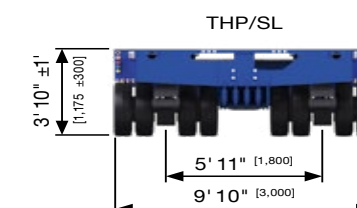

THP/SL-S | THP/SL-L | THP/SL

ACCESSORIES AND OPTIONS

+	TOWING EQUIPMENT AND GOOSENECKS	+ Steering swivel arm for single widths + Center pulling device for parallel combination (1+1/2) + Center pulling device for parallel combination (1+1) + Drawbar 6' 7" [2,000 m], 9' 10" [3,000 m], 16' 5" [5,000 m], 23' [7,000 m] and 29' 6" [9,000 m] + Universal gooseneck 57,300 lbs [26 t], 77,100 lbs [35 t], 99,200 lbs [45 t] and 114,600 lbs [52 t]
	GENERAL ACCESSORIES	+ Kohler diesel hydraulic power pack + Kohler gasoline hydraulic power pack + Operation panel + Cable/radio remote controls and »SmartControl«
	LOADING EQUIPMENT	+ Drop decks + Vessel bridges + Excavator decks + Intermediate spacers + Spacer
	TURNTABLE	+ 220,000 lbs/440,000 lbs [100 t/200 t] + 660,000 lbs/880,000 lbs/1,323,000 lbs [300 t/400 t/600 t] [1]
	BLADE TRANSPORT DEVICE	+ FTV 550
	TOWER ADAPTER	+ RA 2 + RA 3 + RA 4
HIGH GIRDER BRIDGE		+ »FAKTOR« 5.5 + »FAKTOR« 5

[1] 1,323,000 lbs [600 t] turntables for double width combination only




ACCESSORIES FOR
HEAVY-DUTY MODULES
TOWED AND SELF-PROPELLED



THP/SL-S | THP/SL-L | THP/SL

TECHNICAL DATA

⚙️	TECHNICAL DATA		THP/SL-S	THP/SL-L	THP/SL
		Tires	Single tires 245/70 R 17,5 [1] 285/70 R 19,5 [2]	Twin tires 215/75 R 17,5	Twin tires 215/75 R 17,5
		Axle load	34,400 lbs at 12 mph [1] [15.6 t at 20 km/h] 50,700 lbs at 6 mph [2] [23 t at 10 km/h]	57,500 lbs at 12 mph [26.1 t at 20 km/h]	99,000 lbs at 0.6 mph [45 t at 1 km/h]
		Axle compensation	1' 9" [600 mm]	1' 9" [600 mm]	1' 9" [600 mm]
		Dead weight (4-axes)	21,000 lbs [1] [9.6 t] 22,500 lbs [2] [10.2 t]	24,400 lbs [11.1 t]	30,500 lbs [13.85 t]
		Vehicle width	9' 10" [3,000 mm]	9' 10" [3,000 mm]	9' 10" [3,000 mm]
		Axle spacing	4' 11" [1,500 mm]	4' 11" [1,500 mm]	4' 11" [1,500 mm] 5' 11" [1,800 mm]
		Maximum steering angle	± 55°	± 55°	± 55°
		Number of axles	2-8	2-8	2-8

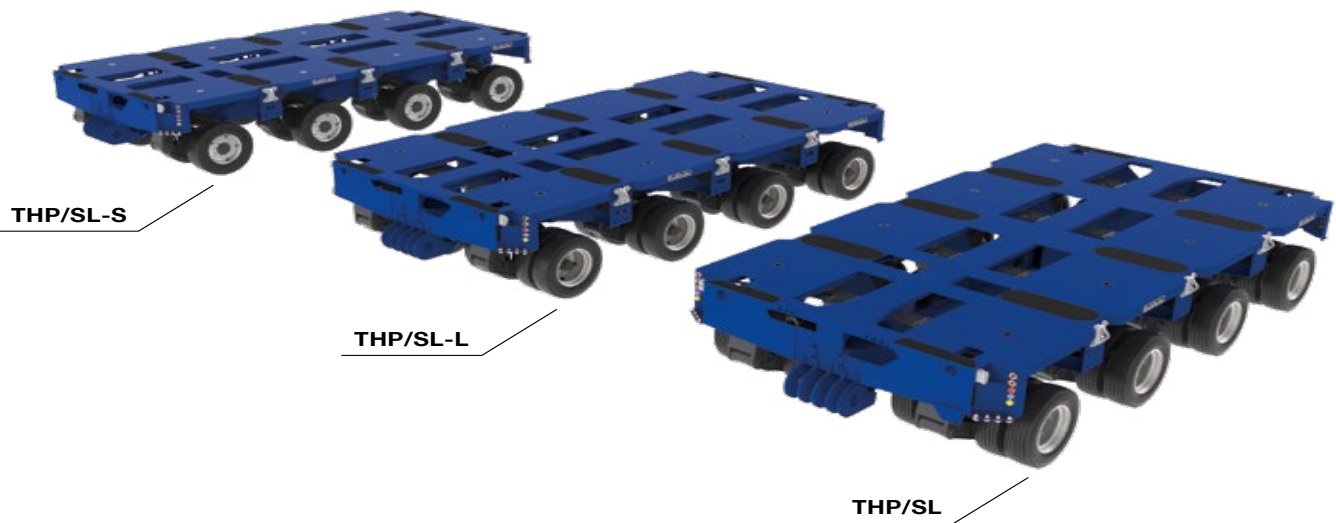



TOO LONG, TOO WIDE,
TOO HEAVY?
NO PROBLEM FOR US!

When the heaviest loads require maximum power, our mechanically steered self-propelled transporters always provide the ideal solution. With enormous traction force, inclines are easy to overcome and flexibility in use is ensured by the ability to combine with other Goldhofer heavy-duty modules.

EFFICIENCY MONSTER

36

The »ADDRIVE« is an intelligent solution which combines the advantages of a towed heavy-duty module with those of a self-propelled transporter while also fulfilling the highest requirements in terms of variable application options, traction force, speed, availability and cost-effectiveness. With »ADDRIVE«, transloading the freight from a road transport vehicle to an off-road vehicle is no longer necessary. All in all, this simply means more efficiency and optimum flexibility for your vehicle fleet.



PST/SL

KEEP GOING WHEN THE GOING GETS TOUGH

38

More performance with the mechanically steered PST/SL: Due to its enormous traction force, even the heaviest loads are light work to move. With the optional »SPEEDRIVE«, you gain even more versatility – because the PST/SL, like the »ADDRIVE«, can be utilized as a towed heavy-duty module for higher transport speeds.





HEAVY-DUTY MODULES (SEL)

For reference only. Operators manual should be consulted and adhered to.

YOUR BENEFITS

✓

Highest-possible traction force per driven, axle line

»

Maximum incline capability in the complete vehicle combination

✓

Mechanical drive system can be disengaged 100%

»

Almost no wear in towed mode and without generating heat

✓

Multiple-combination coupling

»

Can be combined with various heavy-duty module systems from Goldhofer

TECHNICAL FEATURES

+ Twin tires

215/75 R 17,5

+ Axle load

79,000 lbs at 3 mph
[36 t at 5 km/h]

+ Dead weight (4-axes)

33,700 lbs
[15.3 t]

+ Traction force (per driven axle line)

28,000 lbf
[125 kN]

+ Vehicle width

9' 10"
[3,000 mm]

+ Maximum steering angle

± 55°


»ADDRIVE« | »ADDRIVE« 2.0

EFFICIENCY MONSTER

FLEXIBILITY IN ACTION

TRACTION UNIT SUPPORT

DISENGAGING OF THE AXLES



THE NEW »ADDRIVE« 2.0

EVEN MORE PERFORMANCE

Even more performance than its predecessor:
»ADDRIVE« 2.0 supports the traction unit up to a maximum speed of 31 mph [50 km/h], the driven axle is then automatically disengaged. This therefore makes it possible to engage while driving. Additional driven axle lines are available for more traction force and even more power in action.

TECHNICAL FEATURES

+ Dual tires



215/75 R 17,5

+ Axle load

79,000 lbs at 3 mph
[36 t at 5 km/h]

+ Dead weight (4-axes)

33,700 lbs
[15.3 t]

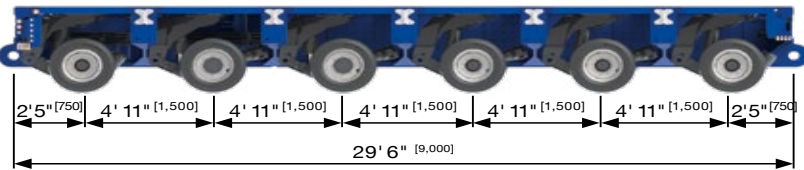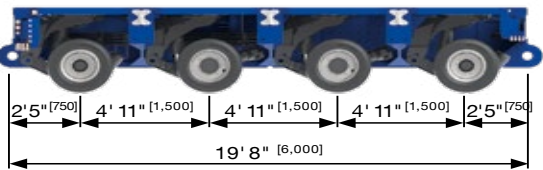



HEAVY-DUTY MODULES (SEL)

For reference only. Operators manual should be consulted and adhered to.

- YOUR
BENEFITS

✓

Extremely high traction force per driven axle line

»

Maximum incline capability less drive axles are required for the same incline

✓

User-friendly operation concept

»

Fast and simple in operation

✓

Combinable with other towed and self-propelled heavy-duty modules

»

More flexible fleet management



TECHNICAL FEATURES	+ Twin tires	215/75 R 17,5
	+ Axle load	99,000 lbs at 0.6 mph [45 t at 1 km/h]
	+ Dead weight (4-axes)	33,700 lbs [15.3 t]
	+ Traction force (per driven axle line)	44,900 lbf [200 kN]
	+ Maximum steering angle	± 55°
	+ Vehicle width	9' 10" [3,000 mm]

PST/SL
KEEP GOING WHEN THE
GOING GETS TOUGH

- HIGH
BENDING MOMENT
- DIVERSABLE
POSSIBLE
COMBINATIONS
- DISENGAGING OF
THE AXLES



NEW OPTIONAL »SPEEDRIVE«
The PST/SL heavy-duty modules can be supplied with switchable driven axles for even more profitability when in action. This therefore means that it can be utilized as a towed module with higher speeds of up to 50 mph [80 km/h] (taking into account country-specific regulations). By activating the drive unit, the load can be positioned at its destination with millimeter's precision without traction unit and without time-consuming and costly reloading. In addition, the »SPEEDRIVE« option enables you to tow the vehicle to the job site on its own axles.

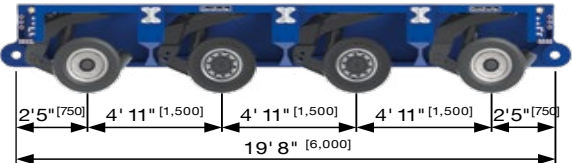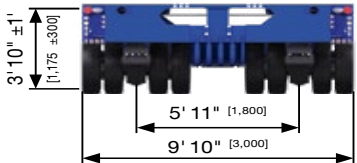

»ADDRIVE« | PST/SL

ACCESSORIES AND OPTIONS



GENERAL
ACCESSORIES

+ Cable remote control for emergency operation

+ Cable remote control

+ Radio remote control

+ Radio remote control »ADDRIVE«

PST
POWERPACKS

+ PP 280
207 kW/280 PS, Width 7' 10" [2,400 mm],
Cummins (TIER 4 FINAL)

+ PP 530
390 kW/530 PS, Width 9' 10" [3,000 mm],
Deutz (TIER 4 FINAL)

»ADDRIVE«
POWERPACKS

+ PP 280 ADD
207 kW/280 PS, Width 9' 10" [3,000 mm],
Cummins (TIER 4 FINAL)

+ PP 530 ADD 2.0
390 kW/530 PS, Width 9' 10" [3,000 mm],
Cummins (TIER 4 FINAL)

»ADDRIVE« | PST/SL


TECHNICAL DATA



TECHNICAL
DATA


	»ADDRIVE«	»ADDRIVE« 2.0	PST/SL
Tires	Twin tires 215/75 R 17,5	Twin tires 215/75 R 17,5	Twin tires 215/75 R 17,5
Axle load	79,300 lbs at 3 mph [36 t at 5 km/h]	79,000 lbs at 3 mph [36 t at 5 km/h]	99,000 lbs at 0.6 mph [45 t at 1 km/h]
Axle compensation	1' 9" [600 mm]	1' 9" [600 mm]	1' 9" [600 mm]
Dead weight (4-axes)	337,000 lbs [15.3 t]	33,700 lbs [15.3 t]	337,000 lbs [15.3 t]
Traction force (per driven axle line)	28,000 lbf [125 kN]	28,000 lbf [125 kN]	44,900 lbf [200 kN]
Vehicle width	9' 10" [3,000 mm]	9' 10" [3,000 mm]	9' 10" [3,000 mm]
Axle spacing	4' 11" [1,500 mm]	4' 11" [1,500 mm]	4' 11" [1,500 mm]
Maximum steering angle	± 55°	± 55°	± 55°
Number of axles	4, 6	4, 6	3-6, 8

»ADDRIVE«
»ADDRIVE« 2.0

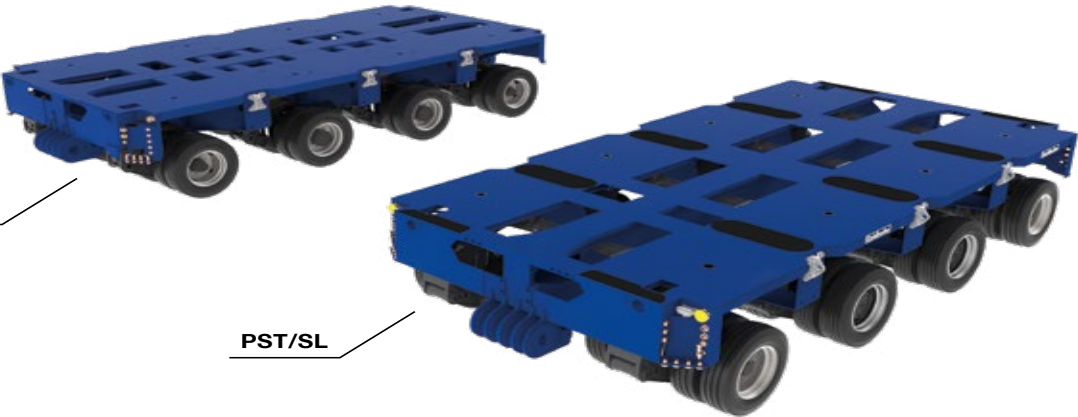

ACCESSORIES FOR
HEAVY-DUTY MODULES
TOWED AND SELF-PROPELLED



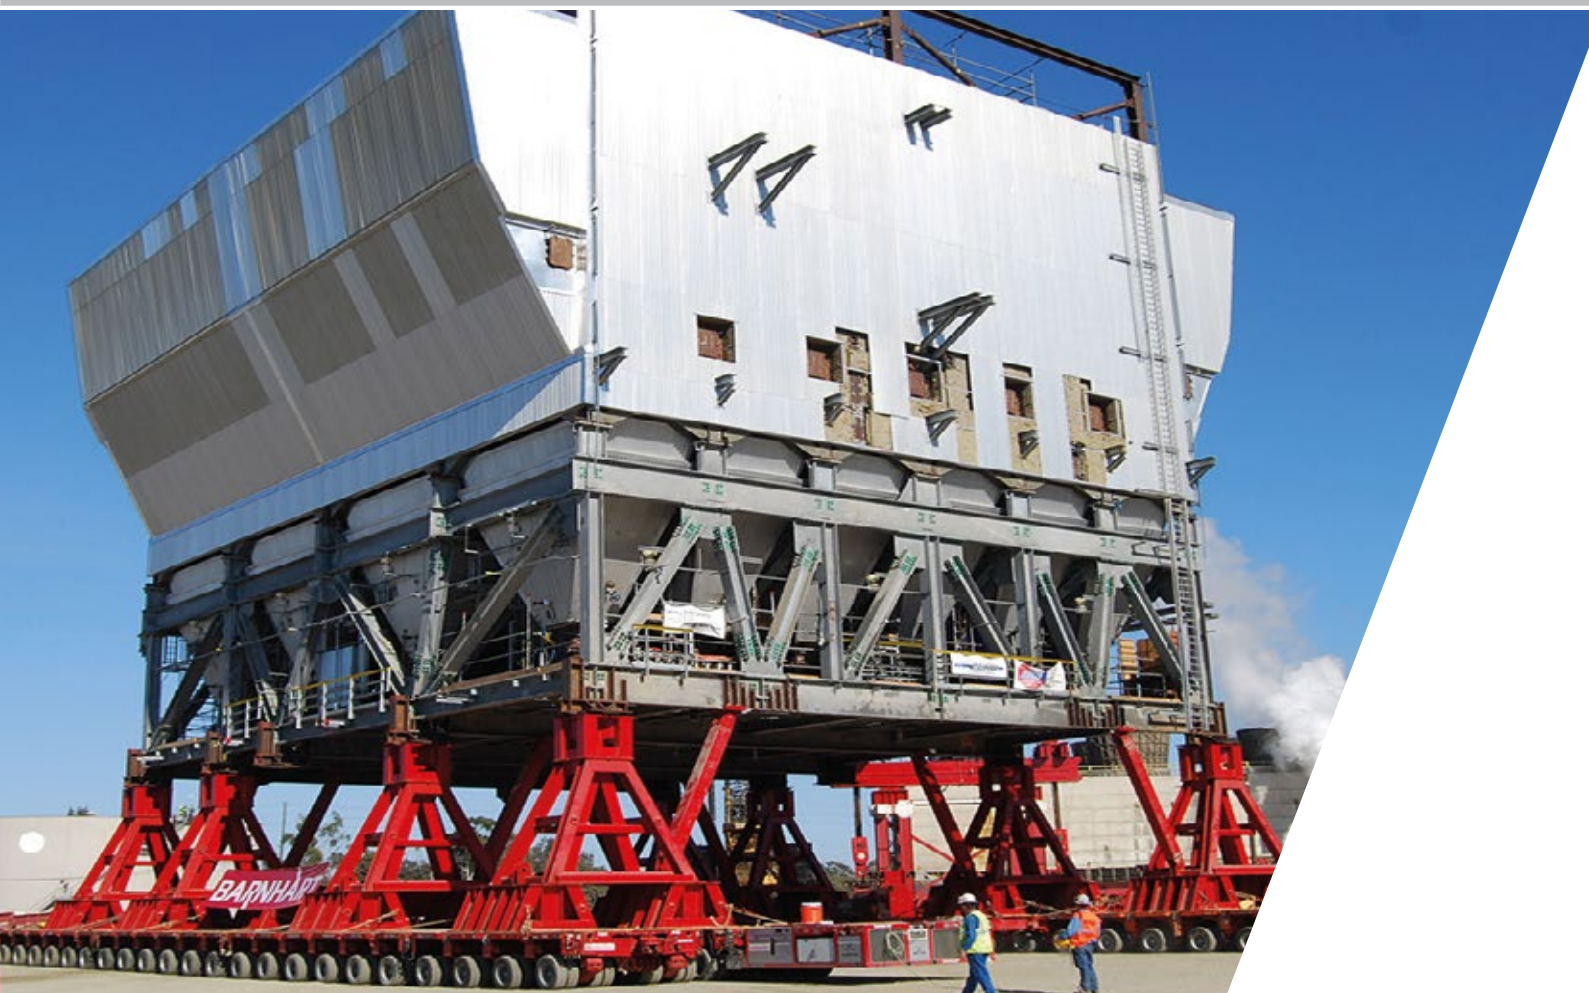

PRECISION ARTISTS

WE TAKE IT

EXTREMELY SERIOUS

The largest and heaviest loads must often pass through extreme bottlenecks or be positioned with millimeter's precision at their destination. Such situations mean that you must be able to rely completely on your vehicle. You can put your trust in our precision artists and always have a clear conscience because you can utilize them to get every load to its destination precisely and safely.

THE ALL ROUNDER

46

When self-propelled vehicles are utilized, they normally must be able to transport various loads – and it is therefore necessary to determine the transport combination to the load in the best possible way. PST/SL-E can be combined with all vehicles of the SL Family, regardless of whether they are intended to be self-propelled or towed heavy-duty modules. Combined with its enormously high traction force and electronic multiway steering, the PST/SL-E is always your vehicle of choice when exceptional performance and maximum flexibility are required.



PST/ES-E

STABLE PERFORMANCE

48


Even more economical fleet mobilization with our self-propelled PST/ES-E Type vehicles: Due to their unique design, they can also be transported in flat racks with their basic width of 7' 11" [2,430 mm]. Depending on the model selected, they can additionally achieve axle loads of up to 132,000 lbs [60 t] so that even smaller combinations can move heavier and larger loads.




PST/SL-E | PST/ES-E

OVERVIEW OF STEERING PROGRAMS


1. Counter steering

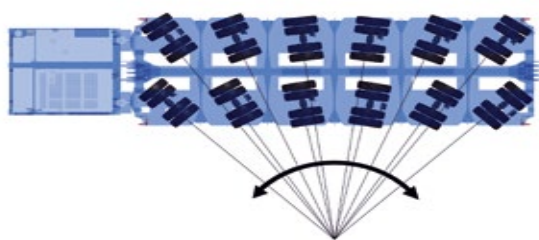


2. Carousel steering

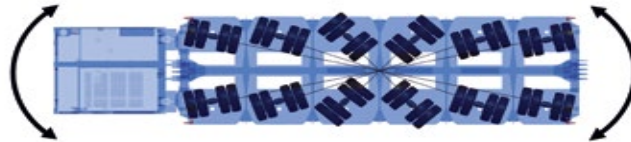


3. Crab steering

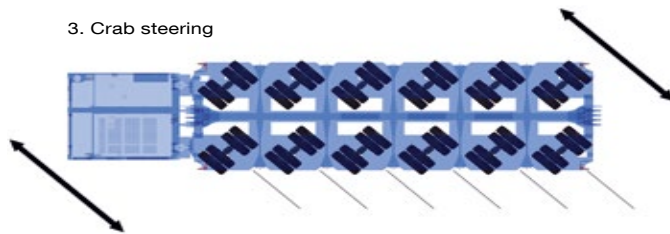


4. Front axle steering

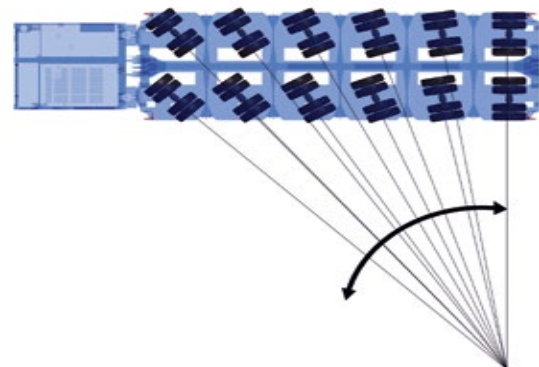


5. Rear axle steering

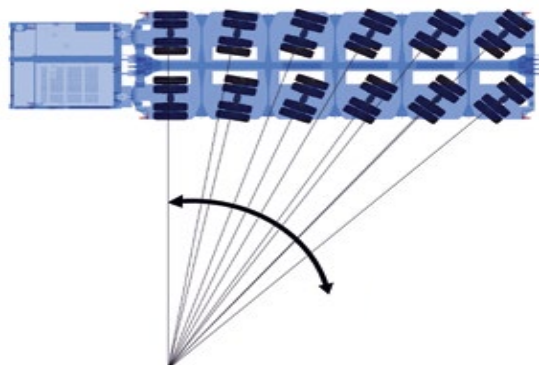


6. Transverse steering 90°

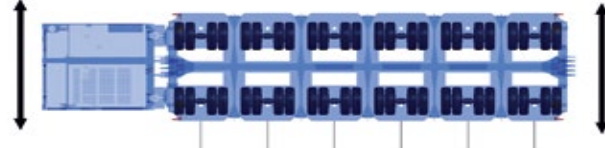


7. Transverse steering left/right

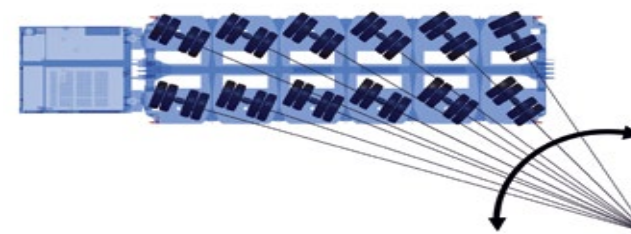


8. Carousel transverse steering

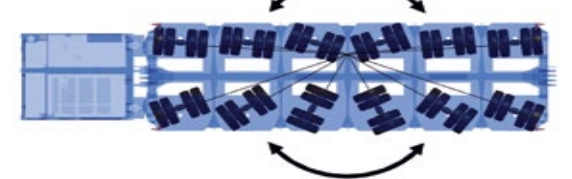


9. Angle combination

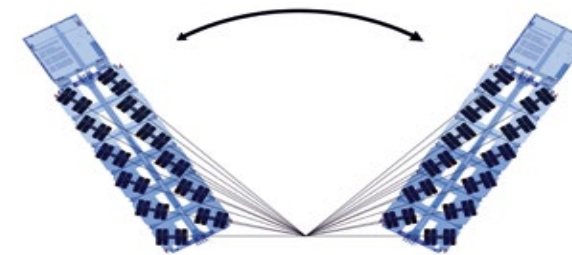

10. T-Combination

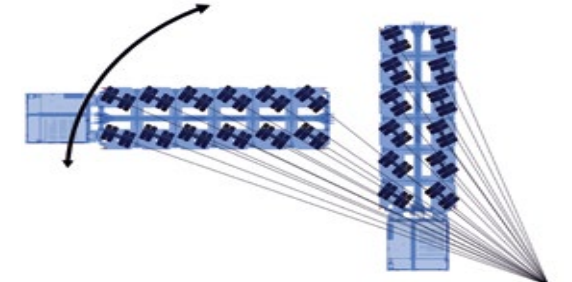

11. Free combination

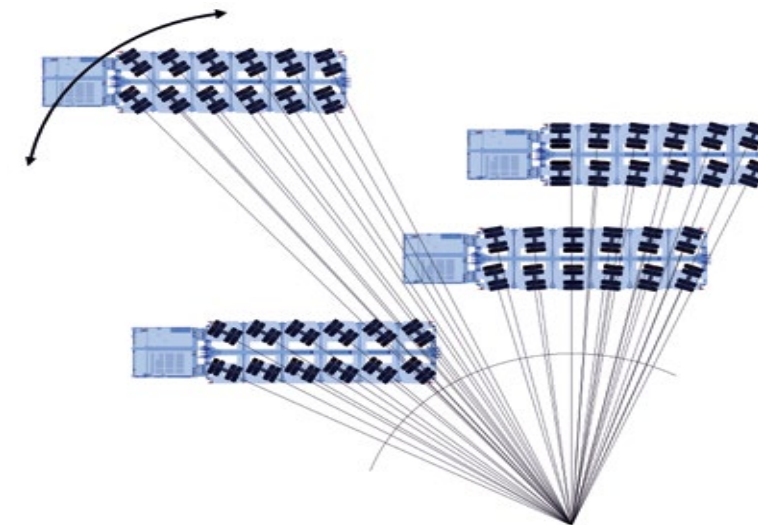



HEAVY-DUTY MODULES (SEL)

For reference only. Operators manual should be consulted and adhered to.

- YOUR
BENEFITS

✓

Economic delivery to the application location

»

Power reserves for unforeseeable project situations

✓

Extremely high bending moment

»

Best possible safety tolerances, even with extreme loads

✓

Additional load lifting point



»

Safe loading for simplified mobilization

TECHNICAL FEATURES	+	Twin tires	215/75 R 17,5
	+	Axle load	99,000 lbs at 0.6 mph [45 t at 1 km/h]
	+	Dead weight (4-axes)	37,600 lbs [17.1 t]
	+	Electronic multiway steering	± 135°
	+	Traction force per driven axle line	40,400 lbf [180 kN]

PST/SL-E THE ALL-ROUNDER

- EXTREMELY
ROBUST VEHICLE
FRAME
- ELECTRONIC
SYNCHRONIZATION
- VARIED
COMBINATION
POSSIBILITIES

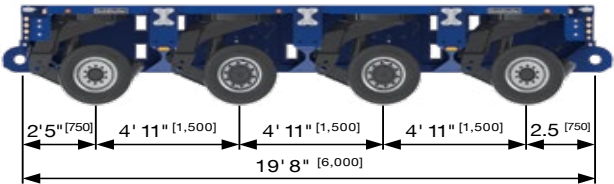



! For reference only.
Operators manual should be
consulted and adhered to.



- ✓ Top of the range traction force at higher speeds
- » Economic fleet management by utilizing less driven axle lines
- ✓ Use of standard tires
- » Worldwide availability with maximum economy
- ✓ Steering angle of $\pm 135^\circ$
- » Best possible steering to reduce tire wear
- ✓ PST/ES-E (285): Track width can be widened at the push of a button
- » Higher lateral stability with a basic width of 8' [2,430 mm] for flat rack shipping



**AXLE LOADS UP
TO 132,000 lbs [60 t]**



+ Single tire	285/70 R 19,5
+ Axle load	88,100 lbs at 0,2 mph [40 t at 0.4 km/h]
+ Dead weight (4-axles)	36,500 lbs [16.6 t]
+ Traction force (<i>per driven axle line</i>)	36,400 lbf [162 kN]
+ Vehicle width	8' [2,430 mm]
Width extendable to	9' [2,730 mm]



+ Single tire	315/60 R 22.5
+ Axle load	99,000 lbs at 0.6mph [45 t at 1 km/h]
+ Dead weight (4-axes)	37,200 lbs [16.9 t]
+ Traction force (per driven axle line)	34,000 lbf [153 kN]
+ Vehicle width	8' [2 430 mm]

Diagram of a four-axle truck with dimensions:

- Front overhang: 2'7" [800]
- Wheelbase (1st to 2nd axle): 5'3" [1,600]
- Wheelbase (2nd to 3rd axle): 5'3" [1,600]
- Wheelbase (3rd to 4th axle): 5'3" [1,600]
- Rear overhang: 2'7" [800]
- Total length: 21' [6,400]



+	Single tire	385/55 R 22,5
+	Axle load	132,000 lbs at 0.6mph [60 t at 1 km/h]
+	Dead weight (4-axes)	45,400 lbs [20.6 t]
+	Traction force (<i>per driven axle line</i>)	35,900 lbf [160 kN]
+	Vehicle width	8' [2,430 mm]

PST/SL-E | PST/ES-E

ACCESSORIES AND OPTIONS



GENERAL
ACCESSORIES

+ Cable remote control for emergency operation

+ Cable remote control

+ Radio remote control

+ Radio remote control »ADDRIVE«

PST
POWERPACKS

+ PP 280
207 kW/280 PS, Width 7' 10" [2,400 mm],
Cummins (TIER 4 FINAL)

+ PP 530
390 kW/530 PS, Width 9' 10" [3,000 mm],
Deutz (TIER 4 FINAL)



ACCESSORIES FOR
HEAVY-DUTY MODULES
TOWED AND SELF-PROPELLED



PST/SL-E | PST/ES-E

TECHNICAL DATA



TECHNICAL
DATA

	PST/SL-E	PST/ES-E
Tires	Twin tires 215/75 R 17,5	Single tire 285/70 R 19,5 ^[1] 315/60 R 22,5 ^[2] 385/55 R 22,5 ^[3]
Axle load	99,000 lbs at 0.6 mph [45 t at 1 km/h]	88,100 lbs at 0.2 mph ^{[40 t at 0,4 km/h] [1]} 99,000 lbs at 0.6 mph ^{[45 t at 1 km/h] [2]} 132,000 lbs at 0.6 mph ^{[60 t at 1 km/h] [3]}
Axle compensation	1' 9" [600 mm]	2' 1" [650 mm] [1] 2' 3" [700 mm] [2][3]
Dead weight (4-axle)	37,600 lbs [17.1 t]	36,500 lbs [16.6 t] [1] 37,000 lbs [16.9 t] [2] 45,400 lbs [20.6 t] [3]
Traction force (per driven axle line)	40,400 lbf [180 kN]	36,400 lbf [162 kN] [1] 34,000 lbf [153 kN] [2] 35,900 lbf [160 kN] [3]
Vehicle width	9' 10" [3,000 mm]	8' 9" [2,430 mm/2,730 mm] [1] 8' [2,430 mm] [2] 8' [2,430 mm] [3]
Axle spacing	4' 11" [1,500 mm]	4' 7" [1,400 mm] [1] 4' 7" [1,400 mm] [2] 5' 3" [1,600 mm] [3]
Electronic multiway steering	± 135°	± 135°
Number of axles	4,6,8	3,4,6,8

^[1] 385 tires ^[2] 315 tires ^[3] 285 tires





WE HELP YOU TO BUILD THE FUTURE

Goldhofer is known for tailored solutions according to customer's specific requirements. Special vehicles for wind blade transportation use proven technology while engineering keeps up to latest standards. With the RA the transportation of tower-segments for windmills becomes child's play, even though the segments grow larger, Goldhofer keeps moving forward. The largest special application is the »FAKTOR« series, that is used all over the world for the most extreme heavy loads like transformers, generators or industrial components.

SAFE, TESTED AND PROVEN HUNDREDS OF TIMES

54

Goldhofer's FTV 550 takes the progressive development of wind turbines into account. The FTV 550 is able to accommodate even the largest rotor blades. The ingenious FTV 550 has already proven itself hundreds of times in practical situations for the transport of the latest rotor blade generations and easily masters them.



RA 2 | RA 3 | RA 4

SUITABLE FOR EVERY SEGMENT

56

Our Tower adapters with up to 397,000 lbs ^[180 t] payloads are designed for the transport of tower segments. The adapters are either coupled with a free-turning device or directly between our heavy-duty modules. Thanks to the free-turning device (FTD), you can master the tightest turns and overcome obstacles of up to 9' 10" ^[3,000 mm] in height.




»FAKTOR« 5 | »FAKTOR« 5.5

FOR THE HEAVIEST LOADS

58

Especially when transporting extremely heavy loads such as transformers, generators or other industrial components, high girder bridges are frequently in demand and to constantly demonstrate their full capacity in difficult infrastructures e.g. on bridges and other load-sensitive ground conditions. Goldhofer's high girder bridges have been tried and tested worldwide and always guarantee a very good payload-to-dead weight ratio as well as maximum safety.



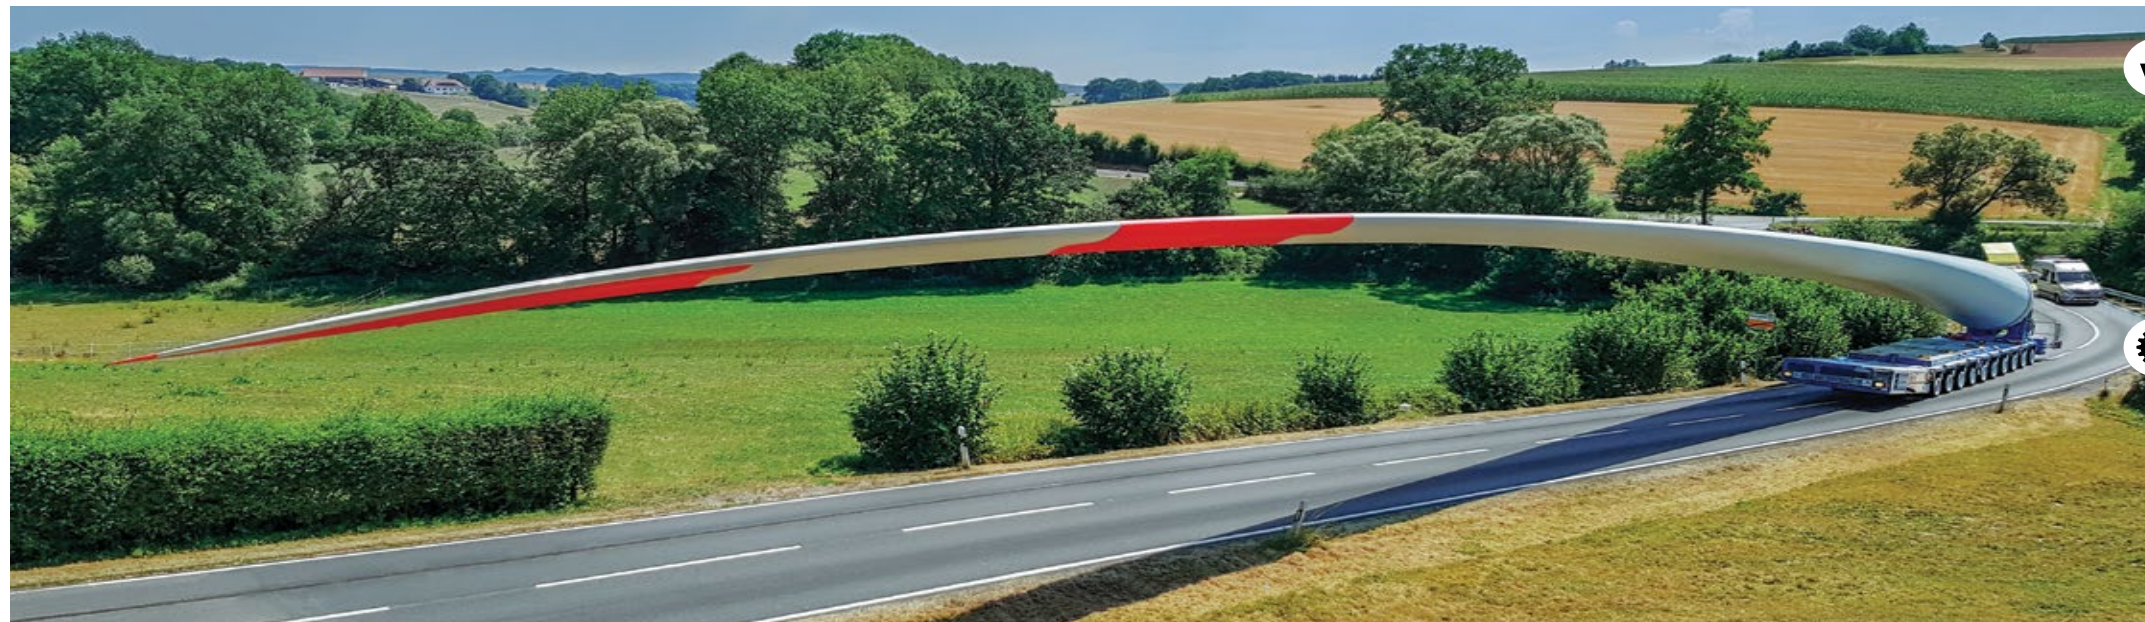

YOUR
BENEFITS

- ✓ Display for essential application parameters
- » Safe and reliable operation
- ✓ Installed between the modular chassis to reduce the total height
- » Very low center of gravity for increased safety
- ✓ Closed working platform
- » Safety at work when attaching the blades

TECHNICAL
FEATURES

- + Raised maximum angle 60°
- + Pitch angle endless
- + Maximum rotor blade diameter 11' [3,400 mm]
- + Dead weight 34,600 lbs [15.7 t]
- + Ballast weight 39,600 lbs [18 t]
- + Lifting torque 1,984 US t/ft [550 mt]

FTV 550

SAFE, TESTED AND PROVEN
HUNDREDS OF TIMES



CHALLENGE ACCEPTED
One of the first transports with the FTV 550 in USA.

Goldhofer



Bigge Tel: (888) 337-BIGGE or (510) 638-8100 • Fax: (510) 639-4053 • Email: info@bigge.com

www.bigge.com

03/2020-EN We reserve the right to make design alterations in the sense of technical progress and on the basis of regulations. Technical data in loaded vehicle condition.

NORTH AMERICA'S LEADING PROVIDER OF TRANSPORT TECHNOLOGY EQUIPMENT

From small excavators to wind blades, compact transformers, bulky machinery to mining machinery and parts to petrochemical plants: Without a doubt, our vehicles are operation-oriented and optimally adapted to the respective requirements of your transport tasks.



WWW.GOLDHOFER.COM

GOLDHOFER INC. | FLITELINE, LLC

7401 Riviera Boulevard, Miramar, FL 33023, USA
Telephone: +1 954 433 5617, Fax: +1 954 433 5445
Web: www.goldhofer.com, E-Mail: info.usa@goldhofer.com
Web: www.flitelineusa.com, E-Mail: info@flitelineusa.com

GOLDHOFER AKTIENGESellschaft

Donaustrasse 95, 87700 Memmingen/Germany
Telephone: +49 8331 15-0, Fax: +49 8331 15-239
Web: www.goldhofer.com, E-Mail: info@goldhofer.com

SALES

Telephone: +1 954-433-5617
E-Mail: info.usa@goldhofer.com

SERVICES AND SPARE PARTS

Telephone: +1 954-433-5617
E-Mail: parts@flitelineusa.com

MADE FOR YOUR MISSION